







Easily detachable for maintenance; and serviceable from below

Compact, low-profile design

Energy consumption of less than 3 watts for AC only and less than 5 watts for battery backup units

ZRELXTE1GCA

Emergency backup model (EM) is completely self-contained


Infield installable directional indicators

Standard AC and emergency units available

AC on indicator light and test switch (EM units only)

Ni-Cad battery on emergency (EM) units

120/277 Volt operation

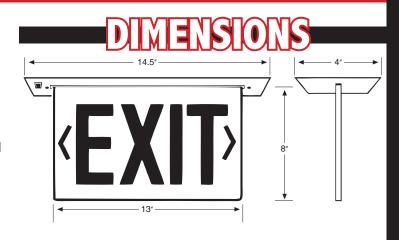

| Series | Number of faces | Panel Color | Ceiling trim plate finish | Operation | Example Catalog # |
|---------|--|--|--|---|----------------------|
| ZRELXTE | 1- Single Face 2- Double Face | RC-Red on clear GC-Green on clear RM-Red on mirror GM-Green on mirror RW-Red on white GW-Green on white | W- White B- Black A- Anodized Aluminum | Blank- AC only EM- Battery Backup | ZRELXTE1RCAEM |

