

exit LIGHTING

LED series exit signs feature an enclosure resistant to corrosive atmospheres, non-hazardous dust environments, water spray and splashing water.



CWLXTE




WLXTE

FEATURES

- ABS, corrosion-resistant UV stabilized enclosure
- AC only or self-powered models
- Universal 120/277 VAC operation
- Removable directional indicators
- Extremely low operating costs
- 80-Year light source life expectancy
- Meets NFPA Life Safety 101, NEC, OSHA, local and state codes
- Wet location listed

DIMENSIONS

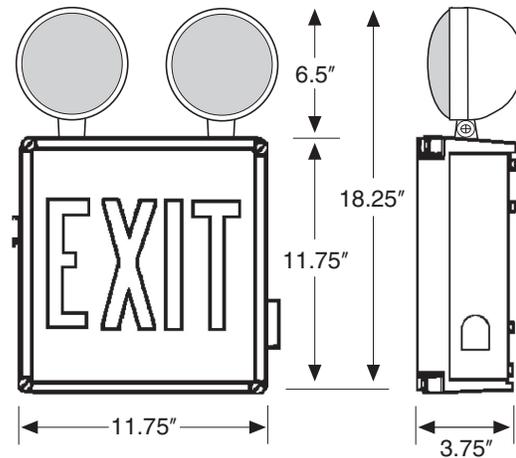

Ordering Information

Catalog Model #	Letter Color	Voltage Input	Lamp Type	Emergency Operation	Battery	Warranty
WLXTER	R-Red	120/277	LED	No	Ni-Cad	5 Years
WLXTEG	G-Green	120/277	LED	No	Ni-Cad	5 Years
WLXTEREM	R-Red	120/277	LED	90 Min.	Ni-Cad	5 Years
WLXTEGEM	G-Green	120/277	LED	90 Min.	Ni-Cad	5 Years
CWLXTEREM	R-Red	120/277	LED/INC	90 Min.	Ni-Cad	5 Years
CWLXTEGEM	G-Green	120/277	LED/INC	90 Min.	Ni-Cad	5 Years



WLXTE