

emergency LIGHTING

Featuring an enclosure ideal for wet locations, resistant to corrosive atmospheres, non-hazardous dust environments, water spray or splashing water.



TFX-2

FEATURES

ABS, corrosion-resistant UV stabilized enclosure

Dual 120 or 277 VAC input, field selectable

Automatic brownout feature

Solid-state charging circuit

Solid-state, line-latched low voltage disconnect provides 100% load disconnect protection to guard against battery deep discharge

Short circuit and overload protection on DC output circuit


Sealed momentary test switch

Sealed AC ready light

UL listed for Wet Location

Remote Capable model offers 15W of remote capacity

DIMENSIONS

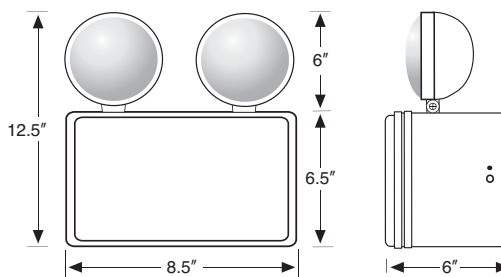

Ordering Information

Catalog Model #	Emergency Operation	Voltage Input	Lamp Wattage	Battery Voltage	Wet Location	Remote Capable	Options
TFX-2	90 Min	120V/277V	2x7.2W	6V	Yes	No	HTR-Internal Heater*
TFX-2-RC	90 Min+	120V/277V	2x7.2W	6V	Yes	Yes	

*Note: For optional internal heater installed, specify suffix "HTR". The installed heater is controlled with an integrated thermostat control.

