


emergency LIGHTING

Compact emergency lighting unit has remote capability for up to two additional standard remote lighting fixtures.

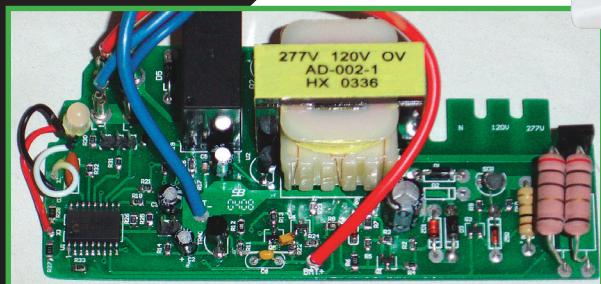

Optional self-diagnostic/self-test feature offers the ultimate in worry-free maintenance and reliability.

FEATURES

Optional "HL" High Lumen model offers 95% aluminum reflector in heads

Optional "HL" unit offers 2.5 times more light output than standard R-5HO

Completely self-contained

Fully automatic operation

Compact, low-profile design in neutral finish

Universal mounting plate with "EZ" quick connect for rapid labor-saving installation

Push-to-test switch

6-Volt, sealed lead acid, rechargeable, maintenance-free battery

Environmentally-coated, solid state charger

Automatic, low-voltage disconnect (LVD)


Universal transformer for 120 or 277 VAC

UL Listed for damp location

Injection-molded, V-0 flame retardant, high-impact, thermoplastic housing

Charge rate/power on LED indicator light

DIMENSIONS

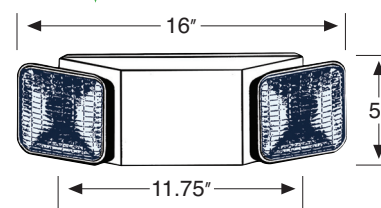

Ordering Information

Catalog Model #	Watts for 1-1/2 hrs.	Voltage	Total Connected Heads/Fixtures*			Damp Location	Options
			4 hrs.	2 hrs.	1.5 hrs.		
R-5HO	22	6	2	3	4	Yes	*HL (High Lumen output; 95% aluminum reflectors in heads)

*Based on 5.4 watt lamps

*Note: Specify suffix "HL" for High Lumen output; features 95% reflective aluminum in heads.

Specify suffix "SDT" to order with the self-diagnostic feature.



R-5HO

Best Lighting Products • 1213 Etna Parkway, Pataskala, Ohio 43062 • 740-964-1198 • www.bestlighting.net