

emergency LIGHTING

Compact and economical unit installs easily and has a low-profile appearance.



R-2



Specify suffix "WC" to receive the R-2 with cord and plug.

FEATURES

Completely self-contained

Fully automatic operation

Compact, low-profile design in neutral finish

Push-to-test switch

6-Volt, sealed lead acid, rechargeable, maintenance-free battery

Environmentally-coated, solid state charger

Automatic, low voltage disconnect (LVD)


Universal transformer for 120 or 277 VAC operation

Standard with two 5.4 watt, glare-free lighting lenses

Injection-molded, V-0 flame retardant, high-impact thermoplastic housing

Charge rate/power on LED indicator light

DIMENSIONS

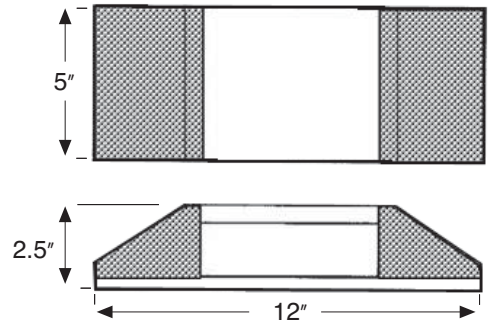

Ordering Information

Catalog Model #	Emergency Operation	Voltage Input	Lamp Wattage	Battery Voltage	Damp Location	Warranty
R-2	90 Min	120V/277V	2x5.4W	6V	Yes	5 years
R-2B (Black)	90 Min	120V/277V	2x5.4W	6V	Yes	5 years



When ordering, specify suffix "SDT" for the Self-Diagnostic Testing feature