

recessed exit
LIGHTING
RELXTE



FEATURES

Compact, low-profile design

Energy consumption of less than 3 watts for AC only and less than 5 watts for battery backup units

Emergency backup model (EM) is completely self-contained

Infield installable directional indicators


Standard AC and emergency units available

AC on indicator light and test switch (EM units only)

Ni-Cad battery on emergency (EM) units

120/277 Volt operation

DIMENSIONS

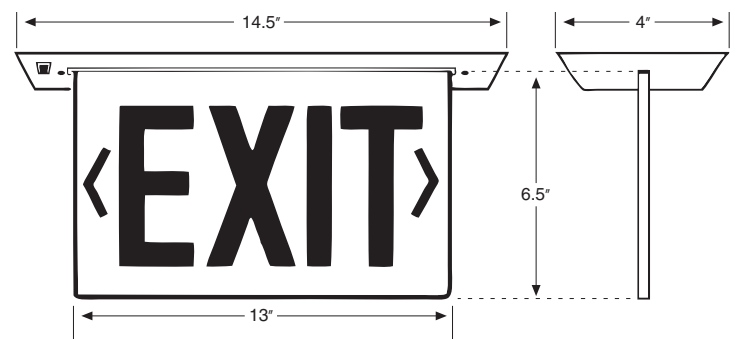

Ordering Information

| Series | Number of faces | Panel Color | Ceiling trim plate finish | Operation | Example Catalog #s |
|--------|--------------------------------|--|---|--|--------------------|
| RELXTE | 1-Single Face 2-Double Face | RC -Red on clear GC -Green on clear RM -Red on mirror GM -Green on mirror | W -White B -Black A -Anodized Aluminum | Blank -AC only EM -Battery Backup | RELXTE1RCAEM |



RELXTE