


Multi-Directional Ladders

Move Ladder Closer to Shelving or Rack—Prevents Overreaching


The answer to narrow aisles when high ladders must be used but require too much room to turn around. When you step on the first step, the casters automatically retract and the rubber feet lower to floor securing ladder for safe climbing. 450-lb. capacity, they have a 14"D top step. Solid steel steps are performed for extra traction. All have 30"H handrails. Gray powder-coat finish.

Compliance: Meet OSHA and ANSI standards.

FOB: PA via truck.




Center casters reduce turning radius for easy maneuverability.



Perforated Steel Step

350-lb. capacity

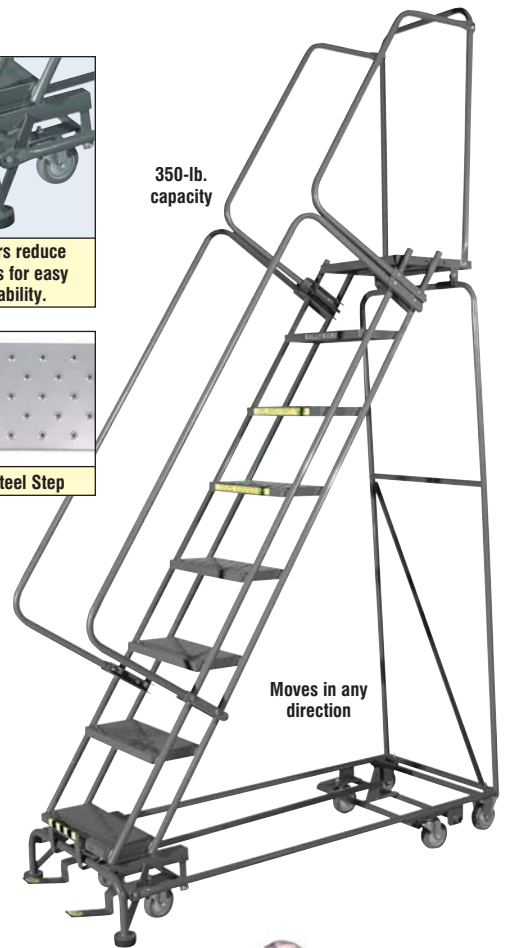

No.	No. of Steps	Top Step Ht. (in.)	O. D. (in.) H x W x L			Each
58° Standard Angle—16"W Steps						
W-C704P6RP	6	60	93	24	49	
W-C704P7RP	7	70	103	24	55	
58° Standard Angle—24"W Steps						
W-C704P8RP	8	80	113	24	61	
W-C704P9RP	9	90	123	32	68	
W-C704P10RP	10	100	133	32	74	
W-C704P11RP	11	110	143	32	80	
W-C704P12RP	12	120	153	32	87	
50° Safety Angle for Forward Descent—24"W Steps						
W-C704RP7P	7	70	103	30	69	
W-C704RP8P	8	80	113	32	78	
W-C704RP9P	9	90	123	32	88	
W-C704RP10P	10	100	133	32	97	
W-C704RP11P	11	110	143	32	106	
W-C704RP12P	12	120	153	32	116	


Solid Stairway Slope Ladders

Safely Descend Stairs Facing Forward

Workers can see the next step because of the 48° gentle climbing angle and the 10"D steps. Made of high-strength, 1"-dia. steel tubing, ladders have a 450-lb. capacity. 24"W solid steel steps with abrasive mat surface make for sure footing. Stepping on first step automatically retracts casters and rubber-tip feet drop down and grip floor securely. To release, raise bottom step and ladder is ready to roll. Top step is 14"D. Optional 30"D top step is available. All Ladders have handrails. Gray. Ship KD.

Compliance: Meet OSHA and ANSI standards.

FOB: PA via truck.



All have step lock.



Solid step with abrasive mat stair treads.

No.	No. of Steps	Top Step Ht. (in.)	Handrail Ht. (in.)	Base (in.) W x L		Each
W-C704H5R	5	50	80	30	50	
W-C704H6R	6	60	90	30	59	
W-C704H7R	7	70	100	30	68	
W-C704H8R	8	80	110	30	77	
W-C704H9R	9	90	120	30	86	
W-C704H10R	10	100	130	30	95	
W-C704H11R*	11	110	140	30	104	
W-C704H12R*	12	120	150	30	113	

*Ship KD.

400-lb. capacity

