

# Connectors

## Carabiners & Hooks

### Snap Hook



FP6650



FP4651

### Large Snap Hook



FP92/2HQ



FP5395



FP5386

### Carabiner



FP83



FP85



FP86



FP86B



FP87



FP88



FP89

### Anchorage Connector



FP93M



FP95M




FP96M



FP99

The most overlooked piece of equipment is often at the end of a lanyard or other piece of fall protection equipment. Connectors or connecting links do a wide assortment of jobs because they are available in a wide variety of shapes and sizes. All provide safe and secure closure and are designed for easy operation even when you have gloves on. All items listed are rated for 5,000lbs. (22kN) unless otherwise specified

## SNAP HOOK




SNAP HOOK



SWIVEL LOAD INDICATING SNAP HOOK

| Part No | Construction                                   | Gate Opening (W) | Width (X)         | Lock Type | Standard      |
|---------|--|------------------|-------------------|-----------|---------------|
| FP6650  | Drop Forged                                    | 3/4" (19 mm)     | 5-9/16" (141 mm)  | Locking   | ANSI, CSA, CE |
| FP4651  | Drop Forged / Swivel Load Indicating Snap Hook | 3/4" (19 mm)     | 7-19/64" (185 mm) | Locking   | ANSI, CSA, CE |


## LARGE LOCKING HOOKS



REBAR/LADDER HOOK

| Part No  | Construction                        | Gate Opening (W) | Width (X)         | Length (Y)       | Lock Type | Standard           |
|----------|-------------------------------------|------------------|-------------------|------------------|-----------|--------------------|
| FP5386   | Drop Forged Rebar/ladder hook       | 1-3/4" (44 mm)   | 3-7/8" (98 mm)    | 7-9/16" (192 mm) | Locking   | ANSI, CSA, CE      |
| FP92/2HQ | Steel Wire Scaffold Hook            | 3-1/2" (90 mm)   | 7" (178 mm)       | 13" (330 mm)     | Locking   | 4000 lbs (1800 kg) |
| FP5395   | Drop Forged Scaffold hook/Large Eye | 2-1/2" (64 mm)   | 4-49/64" (121 mm) | 8-7/8" (225 mm)  | Locking   | ANSI, CSA, CE      |


## CARBINERS




CARABINER

| Part No | Construction                          | Gate Opening (W) | Width (X)        | Length (Y)        | Lock Type    | Standard      |
|---------|---------------------------------------|------------------|------------------|-------------------|--------------|---------------|
| FP83    | Drop Forged Pear-shaped w/Captive pin | 2" (51 mm)       | 5-1/8" (130 mm)  | 8-21/32" (220 mm) | Auto locking | ANSI, CSA, CE |
| FP85    | Drop Forged Offset D                  | 5/8" (16 mm)     | 2-1/2" (64 mm)   | 4-1/2" (114 mm)   | Auto locking | ANSI, CSA, CE |
| FP86    | Drop Forged D-shaped                  | 36/64" (14 mm)   | 1-31/32" (60 mm) | 4-3/32" (104 mm)  | Auto locking | ANSI, CSA, CE |
| FP86B   | Drop Forged w/Captive pin             | 36/64" (14 mm)   | 1-31/32" (60 mm) | 4-3/32" (104 mm)  | Auto locking | ANSI, CSA, CE |
| FP87    | Aluminum D-shaped                     | 3/4" (19 mm)     | 2-3/8" (60 mm)   | 4-1/2" (114 mm)   | Auto locking | ANSI, CSA, CE |
| FP88    | Drop Forged Offset D                  | 29/32" (23 mm)   | 2-59/64" (74 mm) | 4-31/32" (126 mm) | Auto locking | ANSI, CSA, CE |
| FP89    | Aluminum Offset D                     | 1" (25 mm)       | 2-1/2" (64 mm)   | 4-1/4" (108 mm)   | Auto locking | ANSI, CSA, CE |

## ANCHORAGE CONNECTOR HARDWARE



SHEPHERD'S HOOK

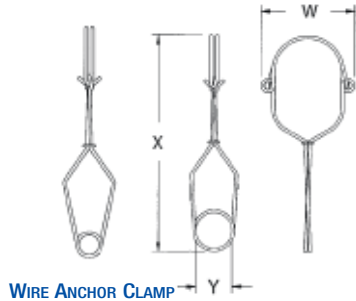

WIRE ANCHOR CLAMP

| Part No | Construction                      | W               | X            | Y               | Use with                |
|---------|-----------------------------------|-----------------|--------------|-----------------|-------------------------|
| FP93M   | Aluminum Shepherd's Hook          | 3-1/2" (89 mm)  | 4" (102 mm)  | 13" (330 mm)    | FP08FT/16 or FP08FT/20  |
| FP95M   | Aluminum Shepherd's Hook          | 7" (178 mm)     | 4" (102 mm)  | 21" (533 mm)    | FP08FT/16 or FP08FT/20  |
| FP96M   | Aluminum Shepherd's Hook          | 12" (305 mm)    | 4" (102 mm)  | 28" (711 mm)    | FP08FT/16 or FP08FT/20  |
| FP99    | Stainless Steel Wire Anchor Clamp | 7-3/4" (197 mm) | 17" (432 mm) | 1-7/16" (37 mm) | Shock absorbing lanyard |

## FIRST MAN UP ACCESSORIES

A great alternative to providing overhead anchorage is to take the equipment up to the anchor. It's simple when you use a Shepherd's Hook attached to an extension pole. The hook is lifted to the anchor with the pole and secured. A rope grab and lifeline or lightweight DuraLite self-retracting lifeline provide the connection to the full body harness.



| Part No   | Construction               | Length         | Use with                     |
|-----------|----------------------------|----------------|------------------------------|
| FP08FT/16 | Fiberglass telescopic pole | 5m (16ft) long | FP93M, FP95M, FP96M, FP0776M |
| FP08FT/20 | Fiberglass telescopic pole | 6m (20ft) long | FP93M, FP95M, FP96M, FP0776M |
| FP0776M   | Rope installer             | —              | —                            |