


Specialty Rollers

WHITE POLY COVER: Non-marking white poly, 1/16 to 1/8" thick. Available on 3/4", 1-3/8", 1.9", and 2" rollers. Good product protection.

RUBBER COVER: Black rubber coated roller is 1.9" O.D. and 1-5/8" I.D. with 7/16" hex spring loaded axle. Non-slip surface.

POLYURETHANE COVER: Polyurethane roller is a softer durometer for better product protection. 1/8" thick. Available on 1.9" and 2-1/2" O.D. rollers.

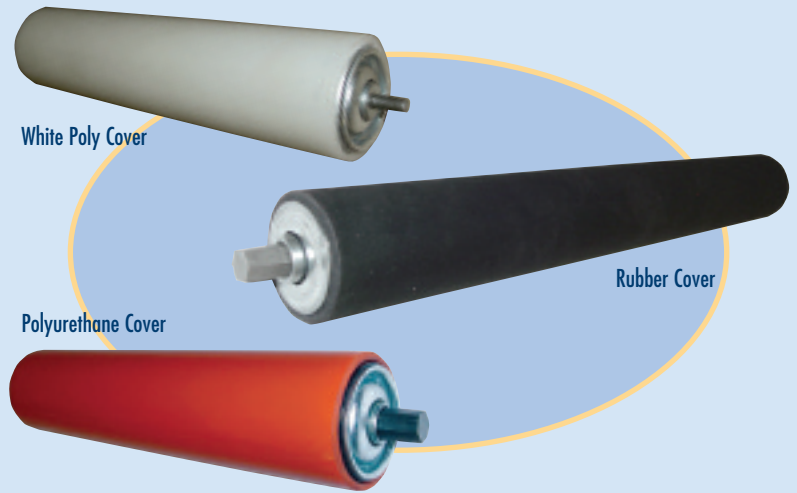




Chain Driven Live Roller Conveyors

This progressive chain driven live roller conveyor is used for heavy duty applications such as pallet moving and drum handling. Perfect for the steel and foundry industries.



CDLR SERIES SPECIFICATIONS:

3/4 HP 220/3/60 Motor ♦ 4" - 5.4 lbs./ft. ♦ 6" Structural Channel Construction ♦ 2-1/2" - 11 Ga. Rollers ♦ 6" Roller Centers ♦ No. 60 Chain, Roller to Roller Drive ♦ 40 FPM: Closer centers available

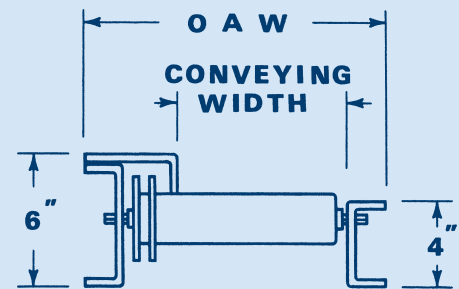

► CDLR SERIES

Model No	Over-All Width In	Usable Width In	Between Rail Width In	WEIGHT					
				Over-All Length: 5 Ft	Over-All Length: 10 Ft	Over-All Length: 15 Ft	Over-All Length: 20 Ft	Over-All Length: 25 Ft	Over-All Length: 30 Ft
CDLR-28	28	21	24	407	710	1013	1317	1620	1923
CDLR-34	34	27	30	436	757	1079	1400	1722	2043
CDLR-40	40	33	36	480	840	1172	1560	1920	2279
CDLR-46	46	39	42	524	920	1319	1796	2115	2512
CDLR-55	55	48	51	679	1010	1478	2056	2336	2764