

# Confined Space



## Rescue Kits

Part No	Content
<b>FP66/415SR</b>	FP2/415SR - 50' 3-Way SRL FP6600/7 - 7' Tripod FP6610/15 - Mounting Bracket FP6630/7 - Storage Bag
<b>FP66/433SR</b>	FP3/433SR - 110' 3-Way SRL FP6600/7 - 7' Tripod FP6610/33 - Mounting Bracket FP6630/7 - Storage Bag
<b>FP66/715SR</b>	FP2/715SR - 50' Winch FP6600/7 - 7' Tripod FP6610/15 - Mounting Bracket FP6630/7 - Storage Bag

## FP6600 Series Tripod

Part No	Stored Length	Extended Length	Weight	Personnel Capacity	Material Capacity
<b>FP6600/7</b>	4.5ft (1.4m)	7ft (2.1 m)	29 lbs (13 kg)	310 lbs (140 kg)	1,000 lbs (450 kg)
<b>FP6600/10</b>	6ft (1.8m)	10ft (3m)	34 lbs (15 kg)	310 lbs (140 kg)	1,000 lbs (450 kg)

## Accessories

Part No	Description
<b>FP6630/7</b>	Durable, zippered bag protects the tripod from damage and dirt while reducing carrying effort - for FP6600/7 tripod
<b>FP6630/11</b>	Same as FP6630/7 - for FP6600/10 tripod
<b>FP4017B</b>	Lifting yoke and spreader bar

## SELF RETRACTING LIFELINE WITH RESCUE WINCH



FP2/415SR



FP3/433SR

The integrated retrieval winch can raise or lower a person in an emergency situation. With a simple flick of the wrist, this 3-way SRL can be switched from fall arrest mode to retrieval mode to speed rescue of an injured worker.

Note: maximum working load of SRL's is 330lbs (150kg) with clothing and tools inclusive.

### Features/Benefits

- Easy to activate retrieval mode-one step activates winch process to save precious time
- 4.5:1 gear ratio-manageable 8 metres per minute retrieval speed


Part No	Lifeline Type	Length	Weight
<b>Regular housing</b>			
<b>FP2/415SR</b>	3/16" (5 mm) stainless cable with swivel load indicating snap hook	50ft (15m)	22lbs (10kgs)
<b>FP2/415KR</b>	1/4" (6 mm) Dyneema cable with swivel load indicating snap hook	50ft (15m)	22lbs (10kgs)
<b>Large housing</b>			
<b>FP3/425SR</b>	3/16" (5 mm) stainless cable with swivel load indicating snap hook	82ft (25m)	36.3lbs (16.5kgs)
<b>FP3/433SR</b>	3/16" (5 mm) stainless cable with swivel load indicating snap hook	110ft (33m)	37lbs (17kgs)

## PERSONNEL WINCHES



FP2/715SR

\* Bracket sold separately

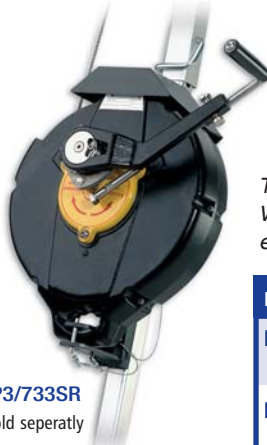

FP3/733SR

\* Bracket sold separately



FP4/700R

\* Bracket included

The same robust durability and strength of North's 3-way SRL's is found in the Personnel Winch. It can handle a variety of tasks including material handling, confined space entry/egress and rescue work. Swivel snap hook equipped.

Part No	Lifeline Type	Length	Weight
<b>FP2/715SR</b>	3/16" (5 mm) stainless cable with swivel load indicating snap hook	50ft (15m)	18.7lbs (8.5kgs)
<b>FP3/733SR</b>	3/16" (5 mm) stainless cable with swivel load indicating snap hook	110ft (33m)	37.5lbs (17kgs)

Part No	Lifeline Type	Length	Weight
<b>FP4/700R</b>	Continuous rope winch with bracket 9mm kernmantle rope with carabiners	up to 656ft (200m)	14.1lbs (6.4kgs)

## BRACKETS AND ACCESSORIES



FP6610/15

Part No	Description
<b>FP6610/15</b>	Mounting brackets for FP2 series SRL and winch housing types
<b>FP6610/33</b>	Mounting brackets for FP3 series SRL and winch housing type