

# Residential Series Office Fire Extinguisher (Primary Protection)

Part Number 21005757

Office use

Single use

UL Rated 3-A:40-B:C



Exceeds NFPA code requirements for the home



## Description

Fights fires common to the office such as wood, paper & energized electrical equipment. This unit is easy to use and has a 10 year warranty.

Features bilingual nameplate and carton.


Exceeds NFPA code requirements for the home.

Metallic Silver finish.

## At a Glance

- Model FX340H
- Multipurpose Dry Chemical
- UL listed
- UL rated 3-A:40-B:C
- Supplied with wall hanger
- Monoammonium Phosphate
- 10 year limited warranty

For use on the following types of fire:




## Product Specification

Net agent weight (Average)	5.0 lb.
Unit weight (Average)	7.75 lb.
Diameter	4.5 inches
Height	16.07 inches
Discharge time	13-15 seconds
Discharge range	12-18 feet
Operating pressure	195 psi
Cylinder	Seamless aluminum
Valve, handle, lever	Nylon
Wall hanger	UL approved

## Features

- Pressure gauge allows for immediate pressure status check
- Easy-to-pull safety pin
- Rust and impact resistant nylon handle
- 5 lb. of fire extinguishing agent (Average)
- 10 year limited warranty
- UL approved wall hanger
- Powder coated cylinder for corrosion protection

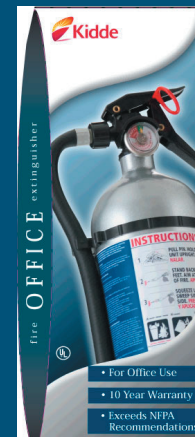

UPC: 0-47871-05757-0

## Packaging Options

Master Pack (2)	21005757
Master Pack (4)	21005758
Cut Case (8)	21005759



MASTER PACK



MASTER PACK



CUT CASE