

Guard Rail Systems

Protect personnel and equipment both visually and physically with our Guard Rail Systems. These economical systems can be utilized indoors or outdoors. Ideal for protecting corners of buildings and machinery from fork truck and vehicle damage. Choose between one, two, or three high rail systems. Tubular posts are machined for continuous or perpendicular rail mounting. US D.O.T. guard rail mounting and I-beam posts available, contact factory. Rail mounting hardware included with post. Floor mounting kit sold separately. Deduct 5" when overlapping on a shared post.

MODEL NUMBER	HEIGHT	LENGTH	MOUNTING POSTS REQUIRED	RADIUS	NET WT. (POUNDS)
GALVANIZED GUARD RAIL - STRAIGHT RAILS					
GR-4	12"	48"	2	--	44
GR-6	12"	72"	2	--	66
GR-8	12"	96"	2	--	89
GR-10	12"	120"	3	--	112
GR-12	12"	144"	3	--	133
POWDER COAT GUARD RAIL - STRAIGHT RAILS					
GR-4-PC-YEL	12"	48"	2	--	44
GR-6-PC-YEL	12"	72"	2	--	66
GR-8-PC-YEL	12"	96"	2	--	89
GR-10-PC-YEL	12"	120"	3	--	112
GR-12-PC-YEL	12"	144"	3	--	133
GALVANIZED GUARD RAIL - CURVED RAILS 90°					
GR-4-CRV	12"	48"	2	30½"	44
GR-6-CRV	12"	72"	2	46"	66
GR-10-CRV	12"	120"	3	75½"	112
GR-12-CRV	12"	144"	3	91½"	133

GUARD RAIL OPTIONS				
MODEL NUMBER	DESCRIPTION	GUARD RAIL LEVELS	NET WT. (LBS.)	
GR-SP	SPRING POST - 24" HIGH	ONE	21	
GR-TP18	TUBULAR POST - 18" HIGH (10" x 10" base plate)	ONE	41	
GR-TP42	TUBULAR POST - 42" HIGH (10" x 10" base plate)	TWO	60	
GR-TP60	TUBULAR POST - 60" HIGH (10" x 10" base plate)	THREE	89	
GR-TP72	TUBULAR POST - 72" HIGH (10" x 10" base plate)	THREE	109	
TUBULAR POSTS FOR DROP IN DESIGN				
GR-TP18-DI	18" HIGH POST (10" x 10" base plate)	ONE	46	
GR-TP42-DI	42" HIGH POST (10" x 10" base plate)	TWO	65	
GR-TP60-DI	60" HIGH POST (10" x 10" base plate)	THREE	94	
GR-TP72-DI	72" HIGH POST (10" x 10" base plate)	THREE	114	
GR-BKT-DI	EXTRA POST MOUNTING BRACKET		5	
GR-CAP	PLASTIC END CAP 7"W x 13½"H x 4"D (Adds 3" to Length)		7	
GR-BG	BUFFER END GUARD 48"L x 16"H x 12½"D (Adds 28" to Length)		40	
GR-TG	FLARED END GUARD 27"L x 18"H x 10"D (Adds 18" to Length)		30	
GR-ABK	CONCRETE ANCHOR BOLTS (4) 3/4" x 4"		2	
GR-SPP	SPRING POST MOUNT PLATE FOR ASPHALT/BLACKTOP APPLICATIONS		3	

Structural Guard Rail Systems

Constructed of structural C-channel 11.5 lbs. per foot for maximum strength and protection. Railing can be removed in a matter of seconds. Features 10" x 10" base plate with (4) pre-drilled mounting holes. Available in custom lengths.


MODEL NUMBER	HEIGHT	LENGTH	NET WT. (POUNDS)
STRUCTURAL GUARD RAIL			
ST-GR-4	8"	48"	46
ST-GR-6	8"	72"	69
ST-GR-8	8"	96"	92
ST-GR-10	8"	120"	115
ST-GR-12	8"	144"	138
TUBULAR MOUNTING POSTS WITH DROP-IN STYLE BRACKET			
STGR-TP-18DI	18" HIGH POST (ACCOMMODATES 1 RAIL)		47
STGR-TP-42DI	42" HIGH POST (ACCOMMODATES 2 RAIL)		67
STGR-TP-60DI	60" HIGH POST (ACCOMMODATES 3 RAIL)		95
STGR-TP-72DI	72" HIGH POST (ACCOMMODATES 3 RAIL)		116
STGR-BKT-DI	EXTRA POST MOUNTING BRACKET		5




48 Hours
to Ship



POWDER COATED TOUGH

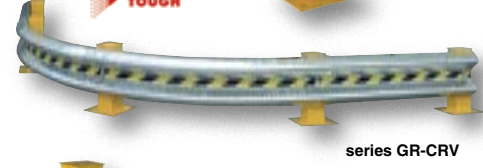

The above two End Guards can either be welded or bolted onto our Galvanized Guard Rail. Hardware not included.

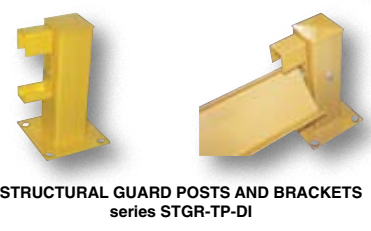

PROTECTIVE BARRIERS