

Portable Cantilever Hoists

- Swivel Crane for Side Loading
- Outriggers to Increase Stability
- Double Acting Manual Hydraulic Hand Pump
- Controlled Lowering
- Adjustable Swing Outriggers with Leveling Jacks to Stabilize Unit to Front or Side
- Expedited & Increased Cable Down Reach
- Customer Supplied Ballast or Optional Factory Supplied Ballast Available



CAPACITY AT ARM LENGTH	MODEL P-JIB-2 (POUNDS)	MODEL P-JIB-4 (POUNDS)
27"	2,000	4,000
34"	1,600	3,200
41"	1,300	2,600
48"	1,100	2,200

Lift Arm Projections:
Beyond Frame: 48"
Outriggers: 40"
Casters: 8" Phenolic



MODEL NUMBER	OVERALL SIZE (W x L x H)	ARM LENGTH BEYOND FRAME	MAXIMUM CAPACITY	PHENOLIC CASTERS	NET WT. (LBS.)
P-JIB-2	34" x 84" x 63"	48"	2,000 lbs.	8" x 2"	850
P-JIB-4	34" x 84" x 63"	48"	4,000 lbs.	8" x 2"	1050

OPTIONAL BALLAST, MODEL P-JIB-BALL-2
OPTIONAL BALLAST, MODEL P-JIB-BALL-4


Hoist Trailer



Unique hoist may be towed behind a car or truck to job site and then used for hundreds of applications. Includes a class 2 ball coupler and safety chains for use with most common hitches. Features (2) large 18" diameter pneumatic wheels, (2) swivel casters 4" x 2" in rear, (2) rigid 5" x 2" in front and one swivel clevis hook with safety latch at the end of the boom. Telescoping lift arm and legs and a removable jack handle standard. Welded steel construction with painted finish. Optional brake light kit with wiring harness available.

MODEL NUMBER	UP/DOWN STROKE	ARM LENGTH	OVERALL SIZE (W x L)	CAPACITY (POUNDS)	NET WT. (LBS.)
H-TRAIL	30" to 91"	53½" to 77½"	47½" x 72"	4,000	465
H-LK	BRAKE LIGHT KIT WITH WIRING HARNESS				15

Counter Balanced Floor Cranes

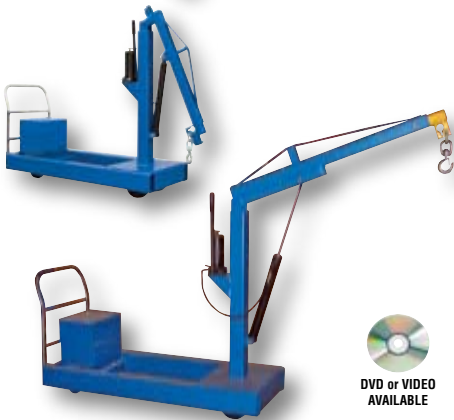

This Counter Balanced Floor Crane has an adjustable boom to allow for maximum adjustment and versatility to lift a variety of loads. Boom is raised with a manual hydraulic hand pump. Boom also telescopes out for greater reach. The counterbalance design eliminates the need for front legs. This makes the unit easier to maneuver and allows the crane to reach tight, hard to reach areas. Counterbalance included. Welded steel construction.

MODEL NUMBER	MAXIMUM CAPACITY AT BOOM HEIGHT	RIGID LOAD WHEEL	SWIVEL REAR CASTER	NET WT. (LBS.)
CBFC-500	500 lbs. @ 24"-86"	8"	6"	1089
CBFC-1000	1,000 lbs. @ 24"-90"	8"	6"	1508
CBFC-2000	2,000 lbs. @ 34"-96"	8"	6"	2610

Coil Lifter



The hoist mounted Coil Lifter has adjustable balance points to accommodate different sized coils. Coils can be up to 90" in diameter and weigh as much as 1,500 pounds. The top adjusting bail allows the operator to insure level transportation of load. Coil lifer is compact for easy storage. Steel construction. Painted finish. Lifting ring and hoist sold separately.

MODEL NUMBER	ROD LENGTH	ROD DIAMETER	OVERALL WIDTH	CAPACITY (POUNDS)	NET WT. (LBS.)
HDP-CL	36"	2¾"	21"	1,500	375