


Tilt Master & Tilt Master Straddle

Lift and position filled tote boxes or baskets without the need of a fork truck or lift table using the newly designed heavy-duty Tilt Master. These 90° tilters will function as transporters by moving completed products from work station to work station without waiting for a fork truck.

A folding ergonomic handle for quick and easy maneuverability. Unit has a thin profile to allow the user to get as close to the load as possible. Units roll easily on 8" x 3" phenolic steering wheels. Floor lock standard. Series TM is designed to be used with open bottom pallets or skids only while the Tilt Master Straddle units, series TMS, can be used with virtually any kind of container or pallet. Units are powered with a 12V DC electric motor including an on-board battery charger standard. AC or *AIR/OIL power units available contact factory (*filter - regulator - lubricator required). Units come standard with a push-button hand control on an 8 foot coil cord.



TILT MASTER
With Only 10½" of Reach




TILT MASTER STRADDLE
With Only 13½" of Reach

TILT MASTER & TILT MASTER STRADDLE OPTIONS		
MODEL NUMBER	DESCRIPTION	NET WEIGHT (POUNDS)
TM-CHUTE	RETROFIT CHUTE OPTION	18
TM-PTDS	POWER TRACTION DRIVE SYSTEM	156
TM-BCI	BATTERY CHARGE INDICATOR GAUGE	10


MODEL NUMBER	CAPACITY (POUNDS)	FORK ADJUSTMENT	OPERATOR REACH	FORK WIDTH	ROTATED HEIGHT	LOWERED HEIGHT	OVERALL SIZE (W x L x H)	NET WEIGHT (POUNDS)
TILT MASTER								
TM-20	2,000	FIXED AT 26" (OD)	10½"	6"	33"	3-5/8"	40½" x 68" x 28½"	715
TM-40	4,000	FIXED AT 26" (OD)	10½"	6"	33"	3-5/8"	40½" x 68" x 28½"	770
TM-60	6,000	FIXED AT 27" (OD)	10½"	6½"	33"	3-5/8"	40½" x 68" x 28½"	851
TILT MASTER STRADDLE								
TMS-20	2,000	½" TO 29½" (ID)	13½"	4"	37"	2-5/8"	57" x 61" x 28½"	840
TMS-40	4,000	½" TO 29½" (ID)	13½"	4"	37"	2-5/8"	57" x 61" x 28½"	1155
TMS-60	6,000	½" TO 29½" (ID)	13½"	4"	37"	2-5/8"	57" x 61" x 28½"	1365

Portable Pallet Inverter

Tilt and rotate loads with our durable Pallet Inverter. Low profile design allows the operator to stand on the rider platform and steer the load from workstation to workstation quickly and easily. DC power lift and drive makes operation safe and efficient. Features an on-board battery charger (AC 110V or 220V/60 hz). Ideal in loading dock areas as a power pallet truck, pallet tilter or as a turntable.

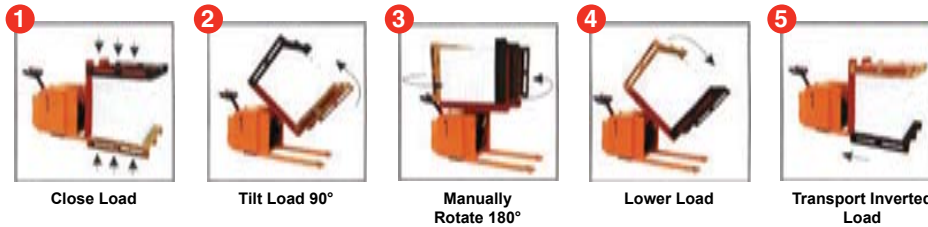

MODEL NUMBER	CAPACITY (POUNDS)	FORK OPENING (MIN & MAX)	LOWERED HEIGHT	FORK (W x L)	OVERALL SIZE (W x L x H)	NET WT. (POUNDS)
PPI-90	2,000	31½" to 47½"	3½"	6" x 30"	33½" x 78" x 54"	1650



Pallet Inverters

Engineered to reduce your costs in production, storage, retrieval, and distribution. The 180° rotation makes pallet exchange quick and simple while reducing product damage. Easy load transfer from wood pallet to plastic pallet, slip sheet, or rental pallet. Features safety rails and guards. Units can be loaded and unloaded easily with a fork truck.

MODEL NUMBER	MAXIMUM LOAD SIZE (W x L)	MINIMUM JAW OPENING HEIGHT	MAXIMUM JAW OPENING HEIGHT	CAPACITY (POUNDS)	NET WT. (POUNDS)
PI-51	50" x 50"	37"	61"	4,400	4048
PI-61	50" x 50"	43"	73"	4,400	4268

LEVER CONTROL STANDARD / NEMA 12 RATING STANDARD

