


Drum Bung Nut Wrenches

Bung Nut Wrenches are available in several different materials to meet many applications.

These multipurpose drum tools not only open and close drum bungs or plugs, they also work as a bung wrench, ring wrench and faucet wrench all in one! Wrenches are universal in that they fit all types of industrial drum plugs in metal or plastic. The angled handles on model BNW-I-W and BNW-B-W protect knuckles in most positions. These durable wrenches will not bend, break or chip. Eliminate the need for extra tools with these multifunctional drum wrenches! Patent pending.

MODEL NUMBER	DESCRIPTION	OVERALL LENGTH	NET WT. (POUNDS)
BNW-A	NON-SPARKING ALUMINUM (SINGLE ENDED)	10½"	1
BNW-I	IRON (DOUBLE ENDED)	13"	5
BNW-I-W	POLISHED ZINC CAST STEEL	12"	5
BNW-B-W	NON-SPARKING BRONZE ALLOY	12"	6
BNW-IX-W	POLISHED ZINC CAST STEEL	12"	2
BNW-BX-W	NON-SPARKING BRONZE ALLOY	12"	2

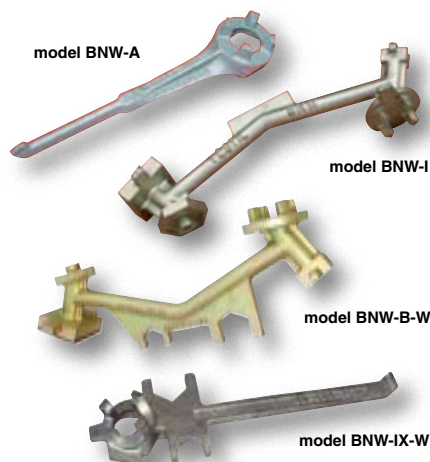

Drum Bung Sockets

Open drum bungs easily! Tighten or remove with a socket wrench (wrench not included). Available in non-sparking bronze alloy or zinc plated cast steel. Fits ¾" and 2" drum plugs. Order optional torque wrench (see below) to tighten drum bung to UNC standards.

MODEL NUMBER	DESCRIPTION	DRIVE SIZE	NET WT. (LBS)
BUNG-S-B1	NON-SPARKING BRONZE ALLOY	3/8"	1
BUNG-S-B2	NON-SPARKING BRONZE ALLOY	1/2"	1
BUNG-S-S1	BRIGHT ZINC PLATED CAST STEEL	3/8"	1
BUNG-S-S2	BRIGHT ZINC PLATED CAST STEEL	1/2"	1
BUNG-S	BRIGHT ZINC PLATED CAST STEEL	3/4"	1



FITS ¾" AND 2" DRUM PLUGS AS SHOWN ABOVE.

Drum Impact Socket

Designed for opening and closing 2" and ¾" drum plugs. Use with a ½" ratchet drive. Manufactured from heat treated chrome vanadium steel for strength when using with pneumatic impact driver. Works with several ¾" and 2" drum plugs, see illustration.

MODEL NUMBER	DESCRIPTION	DRUM SOCKET ACCOMMODATES	RATCHET DRIVE	NET WT. (POUNDS)
BUNG-X	IMPACT SOCKET	2" & ¾"	½"	2


New



Torque Wrenches

Reversible ratchet-head style torque wrench. Easy to set torque setting - wrench 'clicks' when setting is reached. Knurled handle grip surface for extra grip during use. Use with bung sockets to comply with UNC standards.


MODEL NUMBER	DRIVE SIZE	TORQUE RATING	OVERALL LENGTH	NET WT. (POUNDS)
TW-38	3/8"	10 - 80 ft-lbs.	11"	5
TW-12	1/2"	10 - 150 ft-lbs.	11"	5

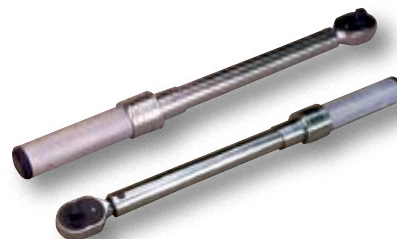

Horizontal Drum Tap

This unique product will allow you to open a 2" drum bung, empty the contents of the drum, and close the drum bung, all with the drum in the horizontal position. Eliminates the need to rotate the drum into the vertical position to gain access. Operation is simple: attach Drum Tap to bung with locking ring, push handle towards drum and twist to unscrew bung, pull handle out away from drum to empty drum contents. Reverse operation to close drum and remove Drum Tap from bung. This product saves time, energy, and reduces the risk of spills. May be used to fill drums in the horizontal position with the bung positioned at the top of the drum. Constructed of fiberglass reinforced polypropylene. O-rings are made of nitrile rubber.

MODEL NUMBER	DESCRIPTION	ACCOMMODATES	NET WT. (POUNDS)
TAP-3	HORIZONTAL DRUM TAP	2" DRUM OPENINGS	4



THE TAP-3 WILL ONLY WORK WITH THIS TYPE OF DRUM PLUG.