




Industrial Duty Circulator Fans

Two speed, 120V, 1 phase, ball bearing, totally enclosed and permanently lubricated Industrial Duty Circulator Fan. Pull chain switch with a 12 foot long cord and an SJT type 3 conductor. Meets OSHA standards and is UL listed. 1/4 HP electric motor.

MODEL NUMBER	BLADE DIAMETER	MOUNTING STYLE	AMPS HIGH	CFM HIGH	CFM LOW	NET WT. (LBS.)
ICRF-24-P	24"	PEDESTAL	2.5	2750	1600	75
ICRF-24-W	24"	WALL	2.5	5750	3200	45
ICRF-30-P	30"	PEDESTAL	2.7	6800	5000	78
ICRF-30-W	30"	WALL	2.7	7900	6000	48
OSCILLATING STYLE						
ICRF-24-PO	24"	PEDESTAL	2.5	2750	1600	79
ICRF-24-WO	24"	WALL	2.5	5750	3200	49
ICRF-30-PO	30"	PEDESTAL	2.7	6800	5000	82
ICRF-30-WO	30"	WALL	2.7	7900	6000	52

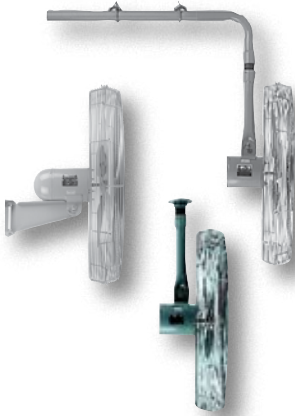

High Performance Circulator Fans

Two speed, 120V, 1 phase, ball bearing, totally enclosed and permanently lubricated Industrial Duty Circulator Fan. Pull chain switch with a 12 foot long cord and an SJT type 3 conductor. Oscillating models available, contact factory. Several mounting styles available. Meets OSHA standards and is UL listed. 1/3 HP electric motor.

MODEL NUMBER	BLADE DIAMETER	MOUNTING STYLE	AMPS HIGH	CFM HIGH	CFM LOW	NET WT. (LBS.)
HPCR-30-P	30"	PEDESTAL	3.4	8200	6200	78
HPCR-30-W	30"	WALL	3.4	8200	6200	48
HPCR-30-I	30"	I-BEAM	3.4	8200	6200	52
HPCR-30-C	30"	CEILING	3.4	8200	6200	48



Work Station Fans

Three speed, 120V, 1 phase, totally enclosed, permanently lubricated motor Work Station Fan. Mount with one bolt or lag screw to walls, ceilings, work benches, machines or any surface. Pull chain switch on a 10 foot long SJT type 3 conductor cord. Meets OSHA standards and is UL listed.

MODEL NUMBER	BLADE DIAMETER	MOUNTING STYLE	AMPS HIGH	CFM HIGH	CFM MED	CFM LOW	NET WT. (LBS.)
WSF-12	12"	WALL	1.1	2750	2200	1600	13
WSF-18	18"	WALL	2.2	5750	4700	3200	20
WSF-18-F	18"	FLOOR	2.2	5750	4700	3200	20



Direct Drive Portable Blower

Two speed, 120V, 1 phase, ball bearing, totally enclosed motor. Rocker switch. 15 foot long SJT type 3 conductor cord. 3 paddle style steel blades. 8" rubber wheels. Meets OSHA standards and is UL listed.

MODEL NUMBER	BLADE DIAMETER	RPM HIGH	AMP HIGH	CFM HIGH	CFM LOW	NET WT. (LBS.)
DDB-36	36"	1100	5.6	12500	9000	82



Shutter Mounted Exhaust Fans

Inside-building installation only with vents outside. Eliminate need for external framing and shutter. Ideally suited for thin wall buildings. Units are 120V, 1 phase totally enclosed and permanently lubricated. Pull chain switch. No cord. Junction box provided for direct wiring. Meets OSHA standards and is UL listed.

MODEL NUMBER	BLADE DIAMETER	MOTOR HP	AMPS HIGH	CFM HIGH	CFM MED	CFM LOW	NET WT. (LBS.)
SME-12	12"	1/2	1.1	2750	2200	1600	16
SME-18	18"	1/8	2.2	5750	4700	3200	25
SME-24	24"	1/4	2.5	6800	---	5000	47
SME-30	30"	1/4	2.7	7900	---	6000	54