



REMOTE POWER UNIT
measures 24" W x 24" L x 8" H

Work Station Electric Hydraulic Scissor Tables

Designed to raise products up to an ergonomic working height. The EHLT-WS maximizes safety with minimum space requirements. Ideal for all types of manufacturing and warehouse facilities. External power unit and hand control standard. Electric toe guards standard.

MODEL NUMBER	PLATFORM SIZE (W x L)	LOWERED HEIGHT	RAISED HEIGHT	CAPACITY (POUNDS)	TRAVEL TIME	NET WT. (LBS.)
EHLT-WS-2436-1.5-29	24" x 36"	8-5/8"	31"	1,500	13 sec.	700
EHLT-WS-2448-1.5-36	24" x 48"	7"	36"	1,500	13 sec.	720
EHLT-WS-3248-1.5-36	32" x 48"	7"	36"	1,500	13 sec.	750
EHLT-WS-4048-1.5-36	40" x 48"	7"	36"	1,500	13 sec.	780

TRAVEL TIME BASED ON 3 PHASE POWER

Shorty Scissor Lift Tables

Built with the same quality as all our lift tables, the EHLTS and EHLTSD maximize safety and durability. Designed to raise products up to an ergonomic working height. When tight spaces are what you have, consider a Shorty Scissor Table. Available in both a single and double leg style these tables offer smaller deck sizes customized to your space requirements. Design features include full perimeter pinch point guard and emergency internal brass velocity fuse. External power unit and hand control standard.

Model Number Format: **EHLTS - (width)(length) - capacity - raised height**



SINGLE LEG SET							
VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL TIME (SEC)	NET WT. (POUNDS)
24"	24" - 48"	36" - 48"	1,000	31"	7"	12	668
24"	24" - 48"	36" - 48"	2,000	31"	7"	12	691
24"	24" - 48"	36" - 48"	3,000	31"	7"	12	730
24"	24" - 48"	36" - 48"	4,000	31"	7"	23	721
24"	36" - 48"	36" - 48"	5,000	31"	8"	23	744
24"	36" - 48"	36" - 48"	6,000	31"	8"	23	792

TRAVEL TIME BASED ON 3 PHASE POWER

Model Number Format: **EHLTSD - (width)(length) - capacity - raised height**




DOUBLE LEG SET							
VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL TIME (SEC)	NET WT. (POUNDS)
42"	34" - 48"	36" - 48"	1,000	51"	10"	16	882
42"	34" - 48"	36" - 48"	2,000	51"	10"	23	892
42"	34" - 48"	36" - 48"	3,000	51"	10"	32	903
42"	34" - 48"	36" - 48"	4,000	51"	10"	32	955
42"	34" - 48"	36" - 48"	5,000	51"	10"	48	966

TRAVEL TIME BASED ON 3 PHASE POWER

Double Scissor Lift Tables

Achieve the extra reach you're looking for with our Double Scissor Lift Tables. These full featured electric hydraulic scissor lift tables are used by all types of manufacturing and warehouse facilities. Safety features include: electric toe guard to protect pinch points during lowering of the table, brass velocity fuse to maintain platform height regardless of hydraulic pressure, 24V AC push-button hand control, maintenance prop, and upper travel limit switch to stop table at maximum height reducing motor wear. 2 HP, 460V, 3-phase, 60 Hz totally enclosed motor standard, other voltages available. 3000 psi hydraulic component rating.

Model Number Format: **EHLTD - (width)(length) - capacity - raised height**

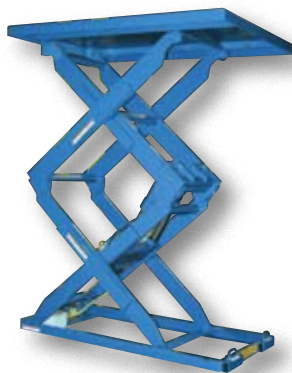

VERTICAL TRAVEL	PLATFORM WIDTH	PLATFORM LENGTH	CAPACITY (POUNDS)	RAISED HEIGHT	LOWERED HEIGHT	TRAVEL TIME (SEC)	NET WT. (POUNDS)
60"	34" - 48"	48" - 72"	1,000	70"	10"	11	1470
60"	34" - 48"	48" - 72"	2,000	70"	10"	16	1575
60"	34" - 48"	48" - 72"	3,000	70"	10"	22	1680
60"	34" - 48"	48" - 72"	4,000	70"	10"	32	1890
60"	34" - 48"	48" - 72"	5,000	70"	10"	34	1942
72"	34" - 48"	64" - 88"	1,000	84"	12"	16	1576
72"	34" - 48"	64" - 88"	2,000	84"	12"	32	1680
72"	34" - 48"	64" - 88"	3,000	84"	12"	48	1785
72"	34" - 48"	64" - 88"	4,000	84"	12"	48	1968
72"	34" - 48"	64" - 88"	5,000	84"	12"	48	2021

TRAVEL TIME BASED ON 460V THREE-PHASE POWER