

Premium Truck Scissor Dock Lift Options

50,000 lbs. ROLLOVER CAPACITY: Additional structural channel and supports for deck. Increases lowered height 2". **Model WL-50.**

MOBILE WHEEL KIT: Kit may be used on the 5,000 and 6,000 lbs. capacity units only. System includes a dolly jack. **Model WL-WK.**

SAFETY ACCORDION SKIRTS: Keep people and debris from getting under lift. We recommend customer installed skirts to avoid freight damage.

Model WL-ASC. (customer installed)

Model WL-ASF. (factory installed)

SPECIAL RESERVOIR MOUNTING: We can fabricate a platform for your power unit if motor cannot sit on the ground or if unit is portable. **Model WL-RMB.**

AUTOMATIC WHEEL CHOCKS: As the unit lifts, this option will block dock end of ramp to avoid roll off. System requires a special pit mount. **Model WL-AWC.**



STOP SIGNAL SIGN: As the truck approaches the lift, the sign raises to let the driver know when to stop for safe loading/unloading. **Model WL-SSS.**

KEY LOCK OPERATION: To avoid unauthorized use of the lift, this option will lock out the controls. **Model WL-KL.**

TWO SPEED PUMP: Increase lifting speed by 55% when lift is unloaded. Ideal for unloading applications. **Model WL-TSP.**

2 HP SINGLE OR THREE PHASE ELECTRIC MOTOR: Consult factory for lift speeds. Both internal and external power units available. 10" minimum lowered height. **Model WL-2HP.**

3 HP SINGLE PHASE ELECTRIC MOTOR: Replace standard three phase power unit with 208/230V, 1 phase, 60Hz power unit (1½ gallons per minute pump speed). **Model WL-3HP.**

7-1/2 HP POWER UNIT: Power unit is wired for three phase 208-230/460V 60Hz, unit will pump 6 gallons per minute. **Model WL-7HP.**

10 HP POWER UNIT: Power unit is wired for three phase 208-230/460V 60Hz, unit will pump 8 gallons per minute. **Model WL-10HP.**

GALVANIZED COATING: Cold galvanized coating designed for washdown applications and wet environments. **Model SPO-WL-LS-ZRC.**

STEEL-IT™ COATING: Designed for incidental food contact and washdown environments. FDA approved. **Model SPO-WL-LS-SSC.**


OIL HEATER: For cold weather applications. Unit supplied with thermostat for automatic heat control. 208-230V single or three phase power. 350 watts. **Model WL-H2.**

OIL HEATER: Same as above; to be used with 460V three phase power unit, 0.75 amps 350 watts. **Model WL-H4.**

Truck Actuated Docklevelers

- The Fully Automatic Loading Ramp
- 55,000 psi high strength checker plate deck
- Toeguards on each side
- (2) Molded Bumpers; 5" W x 16" H x 6" D
- No Dock Attendant Needed
- 12" long lip (extends 6½" into truck)
- Service range of 14" above and 8" below dock
- Lift By-Pass for Safety

Operation: Truck backs against twin actuating arms (bumpers) pushing carriage back (dock and trailer door must be raised). As carriage goes back, deck goes up. When the carriage bumpers contact dock, the deck floats down to rest on trailer. When truck pulls out, deck returns to level supported position automatically. Capacities available up to 100,000 pounds.

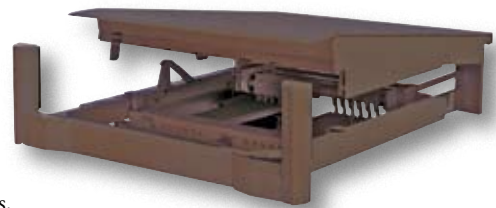

RECESSED DOCKLEVELER series RU



DOCKLEVELER WITH LEGS FOR FRONT OF DOCK PLACEMENT series PU

MODEL NUMBER	DESCRIPTION	CAPACITY (POUNDS)	NET WT. (POUNDS)
RU-600-SCB	6'W x 6'L Recessed Unit, Standard 28" Deep Pit	20,000	2310
RU-800-SCB	6'W x 8'L Recessed Unit	20,000	2520
RU-800-SCB-F	6'W x 8'6"L Recessed Unit	20,000	3045
RU-1000-SCB	6'W x 10'L Recessed Unit	20,000	3150
SU-600-SCB	6'W x 6'L Recessed Unit with Legs, Full 48" Deep Pit	20,000	2415
SU-800-SCB	6'W x 8'L Recessed Unit with Legs	20,000	2730
SU-800-SCB-F	6'W x 8'6"L Recessed Unit with Legs	20,000	3255
SU-1000-SCB	6'W x 10'L Recessed Unit with Legs	20,000	3360
PU-600-SCB	6'W x 6'L (Dockleveler Unit with Legs for in Front of Dock Placement)	20,000	2730
PU-800-SCB	6'W x 8'L (Dockleveler Unit with Legs for in Front of Dock Placement)	20,000	3045
PU-1000-SCB	6'W x 10'L (Dockleveler Unit with Legs for in Front of Dock Placement)	20,000	3675

(Specify Dock Height when Ordering)

TRUCK ACTUATED DOCKLEVELER OPTIONS		
MODEL NUMBER	DESCRIPTION	NET WT. (POUNDS)
WS-DV	DUAL VINYL WEATHER STRIPPING (FACTORY INSTALLED)	6
CAS	CURB ANGLE SET (FOR ANY SIZE DOCKLEVELER)	242
TA-30K/6	30,000 POUND CAPACITY FOR 6 FOOT LENGTH	414
TA-30K/8	30,000 POUND CAPACITY FOR 8 FOOT LENGTH	552
TA-30K/10	30,000 POUND CAPACITY FOR 10 FOOT LENGTH	840
7W/6	7 FOOT WIDTH FOR 6 FOOT LENGTH	230
7W/8	7 FOOT WIDTH FOR 8 FOOT LENGTH	253
7W/10	7 FOOT WIDTH FOR 10 FOOT LENGTH	299
FI	FOAM INSULATION	6
TL	NOTCH FOR TRAILER LOCK	--
SPO	SHALLOW PIT OPTION (minimum depth 24")	--
BE	BUMPER EXTENSION FOR LOW DOCKS	48

CAPACITIES TO 100,000 POUNDS AVAILABLE - CONTACT FACTORY



HEAVY-DUTY SPRINGS HELP LIFT THE CARRIAGE WHEN A TRUCK COMES INTO CONTACT WITH THE DOCKLEVELER