


## Pallet Master/Servers

Enables one person to easily move fully loaded pallets without the use of a fork truck. Unique straddle design works well with pallets and skids with and without an understructure. Ideal for loading and unloading semi-trailers. 12V DC power standard with on-board charger. Push buttons to raise and lower lift are located on power unit. Hand control on coil cord standard. Key-operated ON/OFF control for better security is built into the power unit. All welded steel construction. Each fork is 4"W x 36"L. Lowered height is 3". Unit moves easily with two rigid and two swivel 8" phenolic casters. Floor lock standard.

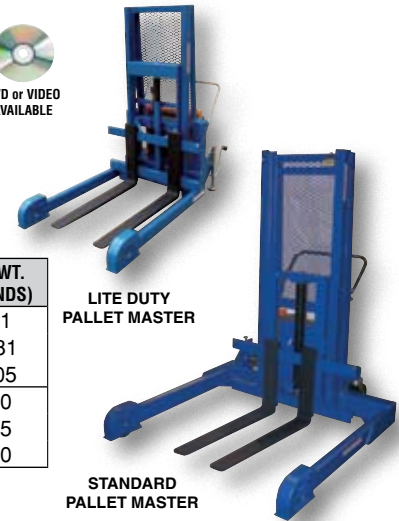

LITE DUTY PALLET MASTER

STANDARD PALLET MASTER

| MODEL NUMBER | CAPACITY (POUNDS) | DESCRIPTION                   | FORK SIZE (W x L) | RAISED HEIGHT | NET WT. (POUNDS) |
|--------------|-------------------|-------------------------------|-------------------|---------------|------------------|
| PMPS-50M     | 2,500             | MANUAL FOOT PUMP              | 4" x 36"          | 50"           | 931              |
| PMPS-50      | 4,000             | SPECIFY 12V DC, AC or AIR/OIL | 4" x 36"          | 50"           | 1081             |
| PMPS-60      | 4,000             | SPECIFY 12V DC, AC or AIR/OIL | 4" x 36"          | 60"           | 1105             |
| LL-PMPS-50*  | 1,200             | SPECIFY 12V DC, AC or AIR/OIL | 4" x 36"          | 50"           | 860              |
| LL-PMPS-60*  | 1,200             | SPECIFY 12V DC, AC or AIR/OIL | 4" x 36"          | 60"           | 875              |
| LL-PMPS-72*  | 1,200             | SPECIFY 12V DC, AC or AIR/OIL | 4" x 36"          | 72"           | 910              |

\* INSIDE STRADDLE WIDTH IS ADJUSTABLE BETWEEN 30" TO 50"

## Counter-Balanced Pallet Master/Servers

Move pallets and skids from one workstation to another with this Counter-Balanced Stacker. Features an 18" horizontal load center and adjustable forks from 8" to 28". Standard 12V DC power lift with on-board charger. Available in AC power or Air/Oil power. Move the unit around easily on its 8" x 3" phenolic casters. Push button pendant control on an 8 foot coil cord is standard on the 12V DC and AC power units.

| MODEL NUMBER  | CAPACITY (POUNDS) | FORK SIZE (W x L) | SERVICE RANGE | OVERALL HEIGHT (RAISED / LOWERED) | NET WT. (POUNDS) |
|---------------|-------------------|-------------------|---------------|-----------------------------------|------------------|
| CB-PMPS-6-50  | 600               | 4" x 36"          | 3" to 50"     | 91" to 73½"                       | 2572             |
| CB-PMPS-10-50 | 1,000             | 4" x 36"          | 3" to 50"     | 91" to 73½"                       | 3439             |
| CB-PMPS-6-60  | 600               | 4" x 36"          | 3" to 60"     | 101" to 83½"                      | 2608             |
| CB-PMPS-10-60 | 1,000             | 4" x 36"          | 3" to 60"     | 101" to 83½"                      | 3504             |



COUNTER-BALANCED PALLET MASTER/SERVER

## Counter-Balanced Stackers

Move small loads from one place to another without the need for oversized fork truck equipment. Counterbalance design allows the operator complete access to three sides of the load. The open front enables the forks to be next to workstation for easy loading and unloading. Standard 12V DC power lift with on-board charger. Includes counterbalance. Push buttons to raise and lower lift are located on power unit. Key-operated ON/OFF control for better security is built into the power unit.

| MODEL NUMBER | CAPACITY (POUNDS) | FORK SIZE (W x L) | SERVICE RANGE | OVERALL SIZE (W x L x H) | NET WT. (POUNDS) |
|--------------|-------------------|-------------------|---------------|--------------------------|------------------|
| CBS-64-1     | 1,000             | 3" x 25"          | 2½" to 58"    | 27" x 62" x 80"          | 1110             |
| CBS-76-1     | 1,000             | 3" x 25"          | 2½" to 76"    | 27" x 62" x 93"          | 1206             |



COUNTER BALANCED STACKER

## Power Traction Drive System Option

Reduce worker fatigue and injury with the Portable Traction Drive Option. This factory installed option is available on portable equipment. An alternative to costly fork trucks, the PTDS includes combination throttle / direction butterfly style controller, an adjustable yoke and auto reverse emergency "belly" switch. This state of the art option allows a single operator to safely and easily move products. Power pack is 42" wide. Maximum speed is 2.5 m.p.h.

| MODEL NUMBER | DESCRIPTION                   | NET WT. (POUNDS) |
|--------------|-------------------------------|------------------|
| PTDS         | POWERED TRACTION DRIVE SYSTEM | 156              |

### PALLET MASTER/SERVER & STACKER OPTIONS

| MODEL NUMBER | DESCRIPTION   | NET WT. (POUNDS) |
|--------------|---|------------------|
| PMPS-DCR     | RETROFIT DRUM CARRIER ROTATOR (800# CAPACITY)<br>(SEE PAGE 136 FOR DETAILS) | 239              |
| PMPS-BC      | BENCH TOP STYLE BATTERY CHARGER   | 8                |
| PMPS-BCI     | BATTERY CHARGE INDICATOR GAUGE  | 1                |



COUNTER-BALANCED PALLET MASTER SERVER W/POWER TRACTION DRIVE