

Pallet Pullers

Pallet pullers are used to pull pallets to rear of trailers for easy fork truck access. Rugged steel construction. Heads are self-cleaning and unaffected by wood particles, paint or grease. Pallet pullers are NOT designed for lifting.

- PAL-12 and PAL-16 - Single scissor action allows for wider jaw opening.
- PAL-14 - Cam closing action provides maximum gripping strength and reduces pinch points. Safety handle enables easier positioning and removal.
- Grips both metal and wood pallets with biting action.
- PAL-21 and PAL-LP - One piece curved heads have integral spurs for gripping pallet stringers.




MODEL NUMBER	DESCRIPTION	PULLING CAPACITY	JAW HEIGHT	JAW OPENING	NET WT. (LBS.)
PAL-12	SINGLE SCISSOR	5,000 lbs.	2¾"	7"	14
PAL-16	SINGLE SCISSOR Heavy-duty	6,000 lbs.	2"	5"	16
PAL-14	CAM ACTION	5,000 lbs.	1½"	3"	17
PAL-21	DOUBLE SCISSOR	5,000 lbs.	2¾"	3"	25
PAL-LP	DOUBLE SCISSOR - LOW PROFILE	5,000 lbs.	2"	3¼"	24
PPC-20	20' OF ¼" CHAIN W/GRAB HOOKS	6,000 lbs.	---	---	17
PPC-40	40' OF ¼" CHAIN W/GRAB HOOKS	6,000 lbs.	---	---	32

NOT FOR LIFTING

Prylever Bars

Provide dock workers, riggers, and freight handlers with the leverage to get underneath heavy objects for transporting with fork truck, hand truck, pallet truck, or machinery movers. Two 5" x 2" poly-on-steel wheels. 6"W x 8"L x ½" thick steel nose plate with beveled edge is bolted on the wood handle units and welded on the steel units. Steel units feature powder coat blue finish.

MODEL NUMBER	DESCRIPTION	BAR LENGTH	CAPACITY (POUNDS)	NET WT. (LBS.)
PLB-5	WOOD PRYLEVER BAR	5'	4,250	36
PLB-6	WOOD PRYLEVER BAR	6'	4,250	41
PLB-7	WOOD PRYLEVER BAR	7'	4,250	46
PLB/S-5	STEEL PRYLEVER BAR	5'	5,000	37
PLB/S-6	STEEL PRYLEVER BAR	6'	5,000	42
PLB/S-7	STEEL PRYLEVER BAR	7'	5,000	47

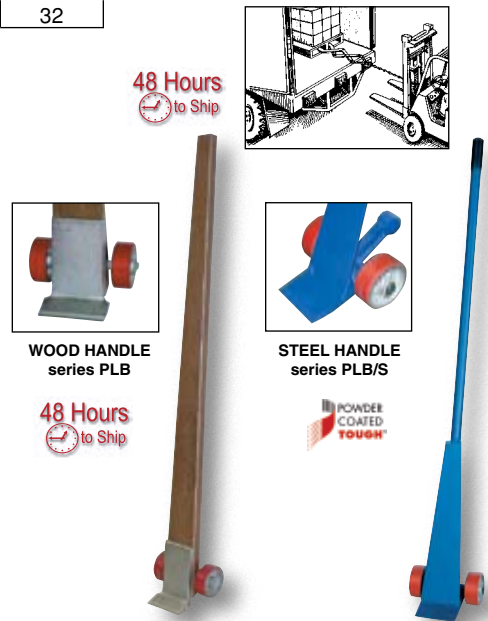


Rubber Wheel Chocks

48 Hours to Ship

Constructed of reinforced rubber to provide a sure grip on virtually any surface. Curved surface contours to fit tires. Rubber resists tearing, abrasion, ozone weathering, etc. Functional design is durable in all weather conditions.

The Airline Chock is suitable for small and large aircraft. Includes a 36" polypropylene rope with handle and reflectors connected to chocks.

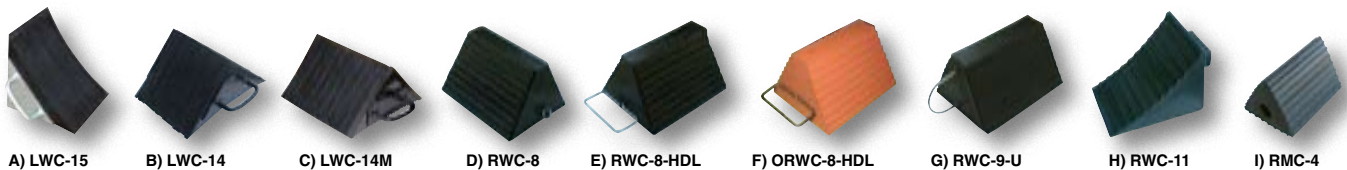

TYPE	MODEL NUMBER	DESCRIPTION	DIMENSIONS (W x H x D)	NET WT. (LBS.)
A	LWC-15	LAMINATED RUBBER	8" x 8" x 8"	18
B	LWC-14	LAMINATED RUBBER	10" x 5½" x 10"	17
C	LWC-14M	LAMINATED RUBBER (RUBBER GRIPS)	10" x 5½" x 10"	17
D	RWC-8	MOLDED RUBBER (EYEBOLT)	9¼" x 6" x 8"	10
E	RWC-8-HDL	MOLDED RUBBER (HANDLE)	9¼" x 6" x 8"	12
F	ORWC-8-HDL	MOLDED RUBBER (ORANGE)	9¼" x 6" x 8"	12
G	RWC-9-U	MOLDED RUBBER ("U" HANDLE)	9¼" x 6" x 8"	11
H	RWC-11	MOLDED RUBBER (WHC-MR)	7" x 7¾" x 10"	13
I	RMC-4	EXTRUDED RUBBER	6½" x 4¾" x 4¼"	16
J	EX-4	EXTRUDED RUBBER	10" x 3¾" x 4½"	12
K	EX-11	EXTRUDED RUBBER	8½" x 6" x 8½"	13
L	EX-13	EXTRUDED RUBBER	12" x 5¾" x 6½"	16
M	AC-13	AIRLINE CHOCK WITH ROPE	10" x 4½" x 5"	16



LOADING DOCK EQUIPMENT