


Bell & Gossett BPX™ Brazed Plate Heat Exchangers

For Residential Applications

- Radiant Floors
- Snow Melt
- Domestic Hot Water
- Pool Heating

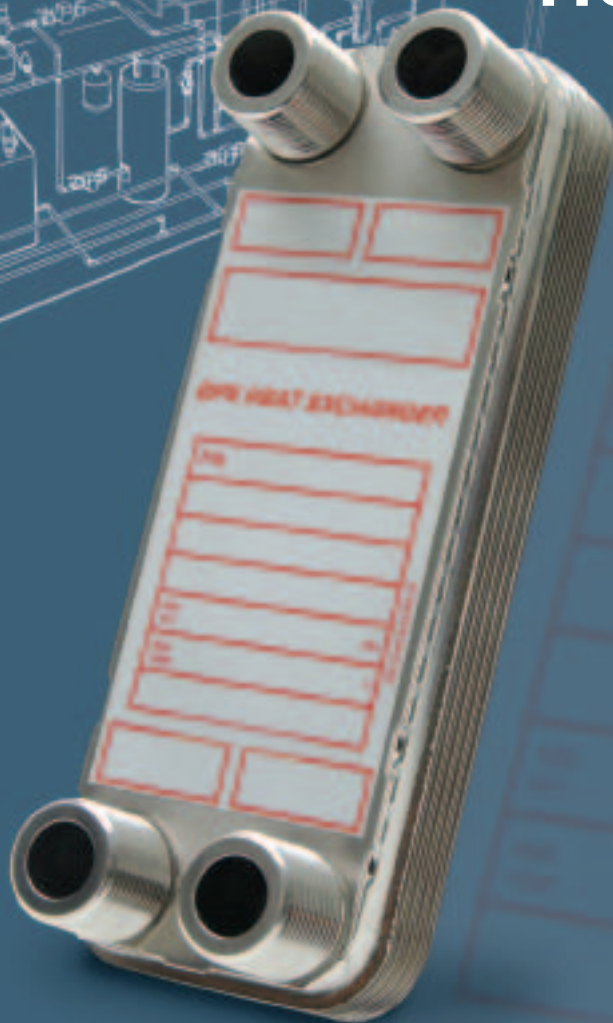

Bell & Gossett®



ITT Industries


Engineered for life

Smaller. Lighter. Stronger. More Efficient.

BPX Brazed Plate Heat Exchangers from Bell & Gossett.

Bell & Gossett Brazed Plate Heat Exchangers are ideal for residential and light commercial hydronic systems because they provide maximum heat dissipation from a compact, lightweight heat exchanger. Unlike conventional shell and tube heat exchangers, our units can be used even in applications where space is at a premium. Their efficient design allows them to provide more heat transfer using less space, making them well suited to a variety of installations, including:

- radiant floors.
- snow melt.
- domestic hot water.
- pool heating.

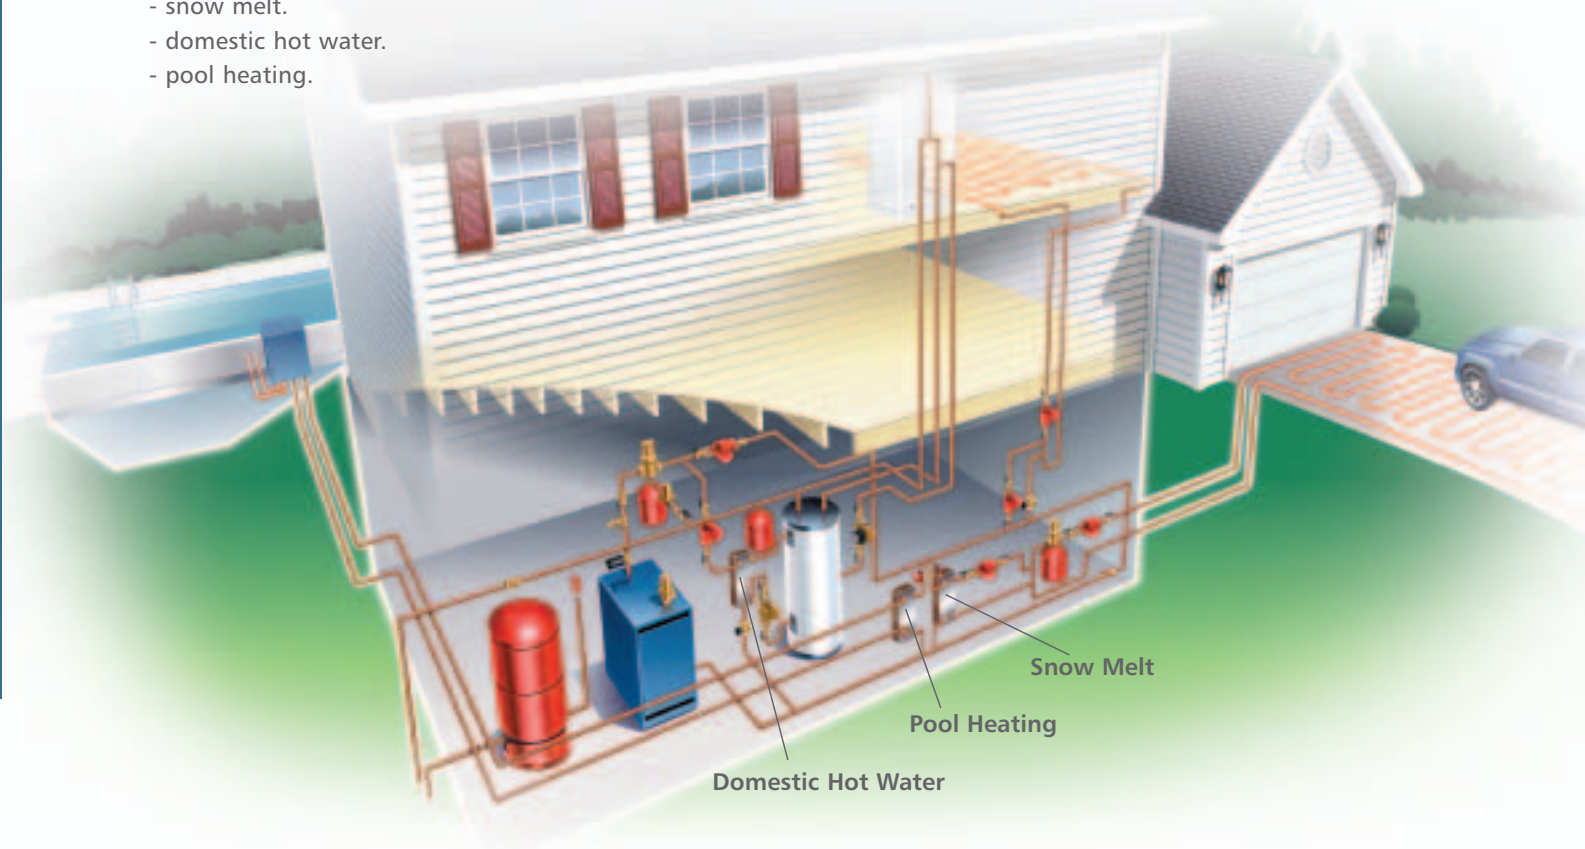

Superior heat transfer.

The BPX Brazed Plate Heat Exchangers offer the highest level of thermal efficiency and durability in a compact, low-cost unit. The corrugated plate design provides very high heat transfer coefficients, resulting in a more compact design. The unit's stainless steel plates are vacuum-brazed together to form a durable, integral piece that can withstand high pressure and temperature.

Compared to shell and tube exchangers, the BPX Heat Exchangers offer a more compact design:

- 1/6 the size
- 1/5 the weight
- 1/8 the liquid required
- 1/3 to 1/5 of the surface area required

Small size. Big impact.

Mechanical Design:
Design pressures up to 435 psig. Maximum design temperature up to 450°F. Minimum design temperature to -310°F.

Construction Codes:
Available codes include UL, CRN, and ASME code stamp.

Materials:
Stainless steel 316L plates. Copper brazed material.



Connections:
From 1/2-inch to 4-inch. Standard connection options include NPT, SAE flanged and sweat. Custom connections available.

Capacity:
Up to 800 GPM and 350 sq.ft. of surface area.

Mounting:
Reduce mounting costs with optional threaded studs or integral mounting bracket.



Quick Selection Tables*

RADIANT FLOOR HEATING — SECTION SCHEDULE BASIS

Boiler Side: Water: 180°F Supply, 160°F Return Radiant Floor Side: 120°F Supply, 100°F Return

Model	HEAT EXCHANGER BTU/Hr (max output)	BOILER SIDE		RADIANT WATER SIDE		B&G PUMP SELECTION†	PIPE SIZE
		Flow GPM	Pressure Drop PSI	Flow GPM	Pressure Drop PSI		
BP400-10	60,000	6.2	8.6	6.1	5.9	NRF-36	1"
BP400-20	125,000	12.9	7.9	12.6	6.8	NRF-36	1-1/4"
BP400-30	175,000	18.0	7.1	17.7	6.5	PL-36	1-1/4"
BP400-40	225,000	23.2	7.3	22.7	6.9	PL-55	1-1/2"
BP411-20	350,000	36.1	6.3	35.3	5.6	PL-55	2"
BP411-30	500,000	51.5	7.4	50.5	7.1	608	2"

Larger Models available

† Assumptions: 50 ft. of total equivalent length of pipe at sizes shown, 1/2" PEX, 0.8 gpm, longest radiant loop is 200 ft., 40 BTU/hr per ft².

DOMESTIC WATER — SECTION SCHEDULE BASIS

Boiler Side: Water: 180°F Supply, 130°F Return Domestic Water Side: 50°F Supply, 140°F Return

Model	HEAT EXCHANGER BTU/Hr (max output)	BOILER SIDE		DOMESTIC WATER SIDE		B&G PUMP SELECTION†	PIPE SIZE
		Flow GPM	Pressure Drop PSI	Flow GPM	Pressure Drop PSI		
BP400-10	60,000	2.5	1.6	1.3	0.3	NBF-9U	3/4"
BP400-20	150,000	6.2	2.1	3.3	0.6	NBF-9U	3/4"
BP400-30	225,000	9.3	2.2	5.0	0.7	NBF-9U	3/4"
BP400-40	350,000	14.4	3.4	7.8	1.0	NBF-12U	3/4"
BP410-30	400,000	16.5	4.9	8.9	1.4	NBF-12U	1"
BP411-30	500,000	20.6	7.6	11.1	2.2	NBF-12U	1-1/4"

Larger Models Available

† Assumptions: 20 ft. of copper pipe with (6) 90-degree elbows.

SNOW MELT — SECTION SCHEDULE BASIS

Boiler Side: Water: 180°F Supply, 160°F Return Snow Melt Side: 40% P.G. 130°F Supply, 100°F Return

Model	HEAT EXCHANGER BTU/Hr (max output)	BOILER SIDE		SNOW MELT WATER SIDE		B&G PUMP SELECTION†	PIPE SIZE
		Flow GPM	Pressure Drop PSI	Flow GPM	Pressure Drop PSI		
BP400-10	60,000	6.2	8.7	4.3	3.5	NRF-36	1"
BP400-20	125,000	12.9	8.2	8.9	4.2	NRF-36	1-1/4"
BP400-30	175,000	18.0	7.8	12.5	4.2	PL-36	1-1/4"
BP400-40	225,000	23.2	8.4	16.1	4.6	PL-55	1-1/4"
BP412-20	250,000	25.8	8.4	17.9	4.0	PL-55	1-1/2"
BP412-30	350,000	36.0	7.7	25.0	3.9	PL-55	1-1/2"
BP412-40	450,000	46.4	8.1	32.1	4.2	613	2"
BP412-50	500,000	51.5	7.6	35.7	4.0	613	2"

Larger Models Available

† Assumptions: 50 ft. of total equivalent length of pipe at sizes shown, 5/8" PEX, 2.0 gpm, longest radiant loop is 250 ft., 126 BTU/hr per ft².

SWIMMING POOL — SECTION SCHEDULE BASIS

Boiler Side: Water: 180°F Supply, 130°F Return Pool Heating Side: 70°F Supply, 107°F Return

Model (3)	POOL SIZE GALLONS (1)	HEAT EXCHANGER BTU/Hr (max output)	BOILER SIDE		POOL WATER FLOW (2) GPM	POOL SIDE PRESSURE DROP PSI
			Flow GPM	Pressure Drop PSI		
BP400-30	10,000	166,823	7	2.3	9	5.1
BP400-30	15,000	250,234	10	2.7	14	4.5
BP412-20	20,000	333,645	13	2.5	18	3.4
BP412-30	40,000	667,290	27	3.9	36	6.9
BP422-40	60,000	1,000,936	40	3.7	54	6.9
BP422-50	80,000	1,334,581	53	3.7	72	6.9
BP422-60	100,000	1,668,226	67	4.7	90	7.9


Larger Models Available

1) Provides approx. 2°F per hour heating with 180°F boiler to achieve 80°F pool temperature.
2) Pool water flow rate usually requires flow by-pass from main pool circulation.
3) Chlorinated pool water can be corrosive to SS316L and copper. Proper control of chlorine levels is required or alternate materials of construction should be considered.

* Consult your local B&G Representative for more detailed sizing and selection information.

Designed for dependability.

By using a brazing process we eliminated the need for gasketed or rolled joints commonly found in traditional exchangers. This allows for higher operating pressures and temperatures with no maintenance and no leaks. The corrugated plates easily handle highly viscous fluids, turbulating them for maximum efficiency. Corrosion-resistant materials ensure a long operating life.

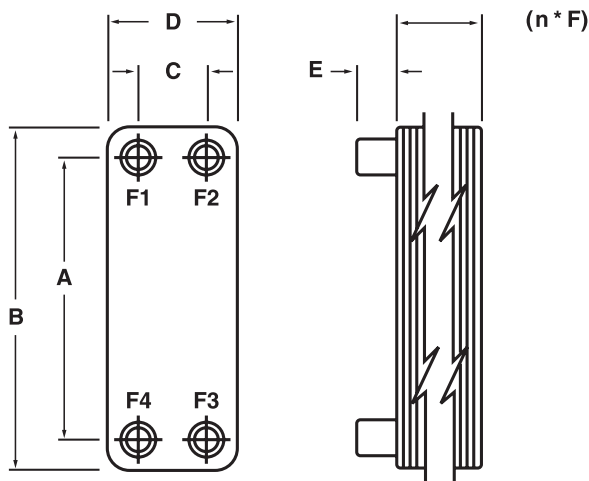

STANDARD CONSTRUCTION

Cover plates	ASTM 316L Stainless Steel
Channel plates	ASTM 316L Stainless Steel
Connections	ASTM 316L Stainless Steel M26 NPT, SAE Flanged and Sweat Connections available
Brazing material	Copper

TECHNICAL DATA STANDARD CONSTRUCTION

Design pressure	435 psi (30 bar)
Design temperature	450° F (224° C)

CONSTRUCTION CODES

UL, CRN, ASME code stamp option.

DIMENSIONS

Model	A		B		C		D		E		F		Connection	Volume		Surface Area		Max no. of plates
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		Gal./chnl.	(L/chnl.)	Sq. Ft.	(Sq. M)	
BP400	6.77	172	8.2	208	1.65	42	3.1	79	0.95	24	0.081	2	3/4" MNPT	0.0076	0.029	0.126	0.012	50
BP410	9.84	250	12.2	310	1.97	50	4.4	112	0.95	24	0.094	2	1" MNPT	0.0159	0.060	0.281	0.026	150
BP411	9.84	250	12.2	310	1.97	50	4.4	112	0.95	24	0.094	2	1" MNPT	0.0159	0.060	0.28	0.026	150
BP412	9.84	250	12.2	310	1.97	50	4.4	112	0.95	24	0.094	2	1" MNPT	0.0159	0.060	0.281	0.026	150
BP415	18.35	466	20.7	526	1.97	50	4.4	112	0.95	24	0.094	2	1" MNPT	0.073	0.103	0.566	0.053	150
BP422	20.43	519	24.3	617	3.62	92	7.5	191	1.9	48	0.112	3	2" MNPT	0.0704	0.266	1.062	0.099	150

For more information about Bell & Gossett BPX Braze Plate Heat Exchangers contact your local Bell & Gossett representative or visit us online at www.bellgossett.com.

USA
Bell & Gossett
175 Standard Parkway
Cheektowaga, NY 14227
Phone: (716) 897-2800
FAX: (716) 862-4176
www.bellgossett.com

INT'L
Bell & Gossett / Export Dept.
175 Standard Parkway
Cheektowaga, NY 14227
Phone: (716) 897-2800
FAX: (716) 862-4176
www.bellgossett.com

CANADA
Fluid Products Canada
55 Royal Road
Guelph, Ontario,
N1H 1T1, Canada
Phone: (519) 821-1900
www.ittfpc.ca

Bell & Gossett®
 ITT Industries
Engineered for life