


Fabricated Aluminum Hose & Cable Bridges

Protect hoses and cables from carts and other traffic. Constructed of lightweight durable aluminum treadplate. All welded. The opening is available in spans of 4" to 16". (3/8" thick plate)

MODEL NUMBER	OVERALL SIZE (W x L)	USABLE SPAN (W x H)	CAPACITY (POUNDS)	NET WT. (POUNDS)
FHCR-24-36-4	24" x 36"	4" x 3"	2,000	55
FHCR-24-40-8	24" x 40"	8" x 3"	2,000	58
FHCR-24-44-12	24" x 44"	12" x 3"	2,000	62
FHCR-24-48-16	24" x 48"	16" x 3"	2,000	66
FHCR-48-36-4	48" x 36"	4" x 3"	2,000	85
FHCR-48-40-8	48" x 40"	8" x 3"	2,000	92
FHCR-48-44-12	48" x 44"	12" x 3"	2,000	102
FHCR-48-48-16	48" x 48"	16" x 3"	2,000	108




48 Hours to Ship




Extruded Aluminum Hose & Cable Bridges

The Extruded Aluminum Hose & Cable Bridges are designed to protect air lines, electrical cords and computer cables from damage by fork trucks, carts, and personnel. These ramps have serrated edges for maximum traction and are lightweight for easy portability. Contact factory for special lengths up to 25 feet.

MODEL NUMBER	OVERALL (W x H)	LENGTH	USABLE SPAN (W x H)	SINGLE-WHEEL CAPACITY (LBS.)	NET WT. (LBS.)
WR-24	2-7/8" x 7/16"	24"	1-1/4" x 5/16"	2,500	2
WR-36	2-7/8" x 7/16"	36"	1-1/4" x 5/16"	2,500	4
WR-48	2-7/8" x 7/16"	48"	1-1/4" x 5/16"	2,500	5
HCR-24	7" x 1-1/8"	24"	2-1/2" x 3/4"	10,000	7
HCR-36	7" x 1-1/8"	36"	2-1/2" x 3/4"	10,000	11
HCR-48	7" x 1-1/8"	48"	2-1/2" x 3/4"	10,000	14
LHCR-36	9-1/8" x 1-1/2"	36"	2-1/2" x 1-1/4"	10,000	14
LHCR-48	9-1/8" x 1-1/2"	48"	2-1/2" x 1-1/4"	10,000	19
LHCR-60	9-1/8" x 1-1/2"	60"	2-1/2" x 1-1/4"	10,000	24
LHCR-72	9-1/8" x 1-1/2"	72"	2-1/2" x 1-1/4"	10,000	29



LOADING DOCK EQUIPMENT

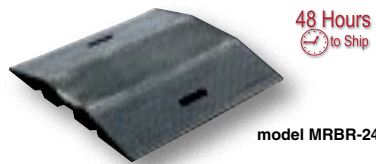

48 Hours to Ship


model MRBR-24

Molded Rubber Hose & Cable Bridges


Designed to protect cables and hoses from pedestrian and rolling traffic. The top surface of each bridge includes serrations for extra traction. Optional connectors may be used to interlock individual units together to form wider bridges. Simply lock together as many units as required.

Model MRBR-24 has carrying handles molded into the ramp. Fits over cables to protect hoses from punctures and kinks.

Series RHCB is ideal for people who are always switching out cables but do not want to move the ramp. The model RHCB-A features an aluminum treadplate insert to protect hoses and cables (for light traffic and slow applications only).

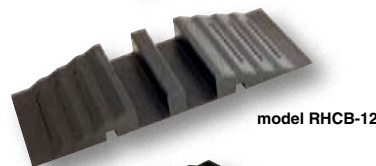

model RHCB-12

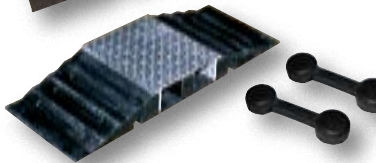

model RHCB-12A CONNECTORS

MODEL NUMBER	OVERALL SIZE (W x L)	USABLE SPAN (W x H)	CAPACITY (POUNDS)	NET WT. (POUNDS)
MRBR-24	24" x 24"	2 3/4" x 1 1/2"	2,400	40
MRBR-CON	CONNECTOR (ORDER 2 PER CONNECTION)			
RHCB-12	12" x 32 3/4"	3 1/2" x 3"	2,400	32
RHCB-12A	12" x 32 3/4"	3 1/2" x 3"	2,400	42
RHCB-CON	CONNECTOR (ORDER 2 PER CONNECTION)			

Urethane Hose & Cable Bridges

Protect hoses and cables from everyday foot traffic. Handles loads up to 100 PSI (2,400 pounds) with less than 10% deflection. Constructed of durable urethane material. Designed with traction cleats on ramp surface to prevent slippage (for light traffic and slow applications only).



MODEL NUMBER	OVERALL SIZE (W x L)	USABLE SPAN (W x H)	CAPACITY (POUNDS)	NET WT. (POUNDS)
URTH-24	24" x 24"	3" x 3"	2,400	20
URTH-36	24" x 36"	3" x 3"	2,400	30
URTH-48	24" x 48"	3" x 3"	2,400	40