



New

Strapping Cart

This universal strapping cart is designed for use with both Poly and Steel strapping. Now you only need one cart for both types of strapping. Unique multi-tier discs allow for use with strapping core sizes of 16" x 3", 16" x 6" and 8" x 8". Cart includes storage tray for holding clips, seals and tools. Heavy-duty wheels for portability. Steel construction with powder coat finish.


MODEL NUMBER	STRAPPING IT ACCEPTS	OVERALL SIZE (W x D x H)	NET WT. (POUNDS)
STRAP-PS-HD	STEEL & POLY	25" x 20¼" x 40¼"	70



Vertical/Horizontal Strapping Cart

This unique cart allows the operator to apply strapping both vertically and horizontally around the load. For use with both steel and poly strapping. For use with 16" diameter core x 3" strapping material. To use, simply engage outer detents (disengaging inner) and turn the removable handle until strap is in the horizontal position. Once in the horizontal position, disengage the outer detents and engage the inner detents. The strap can now be raised and lowered from 28" down to 8" with the same turn handle. Each unit comes standard with 10" x 2½" semi-pneumatic wheels. The equipment tray measures 13½"W x 4½"L x 5"D. Strapping is not included.

MODEL NUMBER	OVERALL SIZE (W x D x H)	FEED STRAP HEIGHT	STANDARD MATERIAL	STRAPPING IT ACCEPTS	NET WT. (POUNDS)
STRAP-VH	27" x 27" x 40"	8" TO 28"	24" MAX. DIAMETER	STEEL & POLY	140

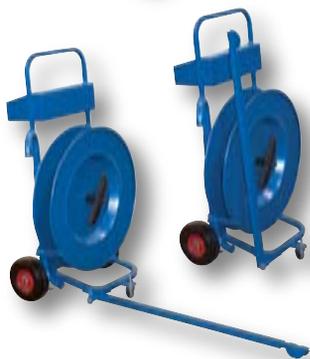

Manual Pallet Probe Strapping Cart

- Increase Productivity • Economical, Fast, Easy • Low Maintenance

The Manual Pallet Probe is a quick and simple answer to a long time dilemma - getting poly strapping through your pallet. To use, simply transport cart to your loaded pallet, extend arm, and run strapping to end clip. After strapping is secure, roll cart probe into pallet along center stringer. The strapping arm will then protrude out the other end allowing the operator to pull the strapping up and over pallet. Unit accepts polypropylene strapping. Tray size is 19"W x 5¾"D. The maximum core width is 5", while the minimum core width is 2½". Overall material diameter is 16" with a minimum of 13¾". Strapping is not included.

MODEL NUMBER	ARM LENGTH	STANDARD MATERIAL	STRAPPING IT ACCEPTS	NET WT. (POUNDS)
STRAP-P2	40"	24" MAX. DIAMETER	POLYPROPYLENE	110



DVD or VIDEO AVAILABLE

Semi-Automatic Pallet Probe Strapping Machine

- User Friendly
- Tension up to 175 lbs.
- 40" Foldable Arm Probe
- Uses 3/8", 1/2" and 5/8" Poly Strapping

Eliminate hand strapping and speed up the process of pallet strapping with this Semi-Automatic Pallet Strapper. Unit automatically feeds the desired polypropylene strap through the pallet, tightens, and seals the strap around the pallet. 115V power supply.

Operation: (a) Unfold chute/leg, (b) Push chute/leg into pallet, (c) Feed polypropylene strap, (d) Insert tip of strap into strapway, (e) Adjust tension, pulling automatically into heat seal, (f) Strip is then cut off to feed the strap out, (g) One-cycle automatically complete, (h) Remove machine and insert into next pallet. Strapping is not included.

MODEL NUMBER	OVERALL SIZE (W x D x H)	FEED STRAP HEIGHT	TENSION (POUNDS)	NET WT. (POUNDS)
DBA-130	22"W x 71"D x 59"H	53½"	175	350