

1000 SERIES FIRE HOSE CABINETS

POTTER-ROEMER



A Division of Smith Industries, Inc.

FOR USE WITH • 1½" / 3.8 cm FIRE HOSE RACK ASSEMBLY

FUNCTION: 1000 Series cabinets accommodate a single 1½" / 3.8 cm fire hose assembly with either Polyflex or PR-Superflex hose. 1000 Series cabinets will also accommodate a portable 5 lb/2.2 kg ABC fire extinguisher when required. (Refer to Section 3000)

OPTIONAL MATERIALS:

Door and Frame available in aluminum, stainless steel, brass or bronze. When optional materials are specified, recessed, semi-recessed and surface mounted cabinets are furnished with square edges. Red powder-coated finish available. When red finish is specified for door and frame, the box remains white, except for surface mounted cabinets. Refer to page 9.

REGULARLY FURNISHED:

20 ga. box, 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge (brass pin). Steel corner seams welded and ground smooth. Recessed, semi-recessed and surface mounted cabinets are furnished with .125" / 0.31 cm radiused frame. Semi-recessed and surface mounted cabinets are furnished with rolled radius. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. Wall mounting and size of cabinet as selected by model number.



ORDERING INFORMATION


- Select cabinet model number
- Select cabinet door style (Refer to page 10)
- Select type of hose assembly (Refer to Section 2000)
- Select a portable 5 lb/2.2 kg ABC fire extinguisher, if required (Refer to Section 3000)

SPECIFICATION:


Fire hose cabinet shall be Model No. _____ as manufactured by Potter-Roemer, Cerritos, CA 800-366-FIRE; door style Suffix _____, containing Model No. _____ fire hose rack assembly.

Model No.	Wall Mounting	MAX. CAPACITY		Box Dimensions			Overall Frame		Wall Opening Required			Trim T	Inlet Location		ADA
		Poly Flex	PR Super Flex	K	L	M	N	O	W	H	D		W	X	
		ft.	ft.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.
1002	Recessed	75 22.8	50 15.2	24 61	30 76.2	5½ 14	27¾ 70.5	33¼ 85.7	25 63.5	31 78.7	6 15.2	5/8 1.6	4 10.1	2¾ 6.9	Yes
1004	Recessed	100 30.4	75 22.8	24 61	36 91.4	5½ 14	27¾ 70.5	39¼ 100.9	25 63.5	37 93.9	6 15.2	5/8 1.6	4 10.1	2¾ 6.9	Yes
1006	Recessed	—	100 30.4	24 61	40 102	5½ 14	27¾ 70.5	43¼ 111.1	25 63.5	41 104.1	6 15.2	5/8 1.6	4 10.1	2¾ 6.9	Yes
1012	Trimless	75 22.8	50 15.2	24 61	30 76.2	6¼ 15.3	27 68.6	33 83.8	25 63.5	31 78.7	6 17.1	—	4 10.1	2¾ 6.9	Yes
1014	Trimless	100 30.4	75 22.8	24 61	36 91.4	6¼ 15.3	27 68.6	39 99	25 63.5	37 94	6¼ 17.1	—	4 10.1	2¾ 6.9	Yes
1016	Trimless	—	100 30.4	24 61	40 102	6¼ 15.3	27 68.6	43 109.2	25 63.5	41 104.1	6¼ 17.1	—	4 10.1	2¾ 6.9	Yes
1022	Semi-Recessed	75 22.8	50 15.2	24 61	30 76.2	5½ 14	27½ 70	33½ 85	25 63.5	31 78.7	4 10.1	2 5	4 10.1	2¾ 6.9	Yes
1024	Semi-Recessed	100 30.4	75 22.8	24 61	36 91.4	5½ 14	27½ 70	39½ 100.3	25 63.5	37 93.9	4 10.1	2 5	4 10.1	2¾ 6.9	Yes
1026	Semi-Recessed	—	100 30.4	24 61	40 102	5½ 14	27½ 70	43½ 110.4	25 63.5	41 104.1	4 10.1	2 5	4 10.1	2¾ 6.9	Yes
1052	Surface	75 22.8	50 15.2	26 66	32 81.3	6 15.2	—	—	—	—	—	6 15.2	—	—	No
1054	Surface	100 30.4	75 22.8	26 66	38 96.5	6 15.2	—	—	—	—	—	6 15.2	—	—	No
1056	Surface	—	100 30.4	26 66	42 107	6 15.2	—	—	—	—	—	6 15.2	—	—	No


1000 SERIES




RECESSED



TRIMLESS



SEMI-RECESSED



SURFACE



1100 SERIES FIRE HOSE CABINETS

FOR USE WITH • 2½x1½" / 6.4x3.8 cm FIRE HOSE RACK ASSEMBLY

FUNCTION: 1100 Series cabinets accommodate a single 2½" x 1½" / 6.4 cm x 3.8 cm fire hose rack assembly with either Polyflex or PR-Superflex hose. 1000 Series cabinets will also accommodate a portable 5 lb/2.2 kg ABC fire extinguisher when required. (Refer to Section 3000)

OPTIONAL MATERIALS:


Door and Frame available in aluminum, stainless steel, brass or bronze. When optional materials are specified, recessed, semi-recessed and surface mounted cabinets are furnished with square edges. Red powder-coated finish available. When red finish is specified for door and frame, the box remains white, except for surface mounted cabinets. Refer to page 9.

REGULARLY FURNISHED:


20 ga. box, 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge (brass pin). Steel corner seams welded and ground smooth. Recessed, semi-recessed and surface mounted cabinets are furnished with .125"/0.31 cm radiused frame. Semi-recessed and surface mounted cabinets are furnished with rolled radius. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. Wall mounting and size of cabinet as selected by model number.




1100 SERIES




RECESSED



TRIMLESS



SEMI-RECESSED



SURFACE

ORDERING INFORMATION

- Select cabinet model number
- Select cabinet door style (Refer to page 10)
- Select type of hose assembly (Refer to Section 2000)
- Select a portable 5 lb/2.2 kg ABC fire extinguisher, if required (Refer to Section 3000)

SPECIFICATION:

Fire hose cabinet shall be Model No. _____ as manufactured by Potter-Roemer, Cerritos, CA 800-366-FIRE; door style Suffix _____, containing Model No. _____ fire hose rack assembly.

Model No.	Wall Mounting	MAX. CAPACITY			Box Dimensions		Overall Frame		Wall Opening Required			Trim T	Inlet Location		ADA
		Poly Flex ft. m	PR Super Flex ft. m		K in. cm	L in. cm	M in. cm	N in. cm	O in. cm	W IDTH in. cm	H EIGHT in. cm		D EPTH in. cm	W in. cm	
1102	Recessed	75 22.8	50 15.2	24 61	30 76.2	8 20.3	27½ 70.4	33¾ 86	25 63.5	31 78.7	8½ 21.5	5/8 1.5	4 10.1	4 10.1	Yes
1104	Recessed	100 30.4	75 22.8	24 61	36 91.4	8 20.3	27½ 70.4	39¾ 100.9	25 63.5	37 94	8½ 21.5	5/8 1.5	4 10.1	4 10.1	Yes
1106	Recessed	—	100 30.4	24 61	40 102	8 20.3	27½ 70.4	43¾ 111.1	25 63.5	41 104.1	8½ 21.5	5/8 1.5	4 10.1	4 10.1	Yes
1112	Trimless	75 22.8	50 15.2	24 61	30 76.2	8¾ 22.2	27 68.6	33 83.8	25 63.5	31 78.7	9¼ 23.4	—	4 10.1	4 10.1	Yes
1114	Trimless	100 30.4	75 22.8	24 61	36 91.4	8¾ 22.2	27 68.6	39 99	25 63.5	37 94	8¼ 23.4	—	4 10.1	4 10.1	Yes
1116	Trimless	—	100 30.4	24 61	40 102	8¾ 22.2	27 68.6	43 109.2	25 63.5	41 104.1	9¼ 23.4	—	4 10.1	4 10.1	Yes
1122	Semi-Recessed	75 22.8	50 15.2	24 61	30 76.2	8 20.3	27½ 70	33½ 85	25 63.5	31 78.7	6½ 16.5	2 5	4 10.1	4 10.1	Yes
1124	Semi-Recessed	100 30.4	75 22.8	24 61	36 91.4	8 20.3	27½ 70	39½ 100.3	25 63.5	37 94	6½ 16.5	2 5	4 10.1	4 10.1	Yes
1126	Semi-Recessed	—	100 30.4	24 61	40 102	8 20.3	27½ 70	43½ 110.4	25 63.5	41 104.1	6½ 16.5	2 5	4 10.1	4 10.1	Yes
1152	Surface	75 22.8	50 15.2	26 66	32 81.3	9¼ 23.4	—	—	—	—	—	9¼ 23.4	—	—	No
1154	Surface	100 30.4	75 22.8	26 66	38 96.5	9¼ 23.4	—	—	—	—	—	9¼ 23.4	—	—	No
1156	Surface	—	100 30.4	26 66	42 107	9¼ 23.4	—	—	—	—	—	9¼ 23.4	—	—	No

1200 SERIES FIRE HOSE CABINETS

POTTER-ROEMER



A Division of Smith Industries, Inc.

FOR USE WITH

- 1½"/3.8 cm FIRE HOSE RACK ASSEMBLY
- 2½"/6.4 cm FIRE DEPT VALVE


FUNCTION: 1200 Series cabinets accommodate a single 1½"/3.8 cm fire hose rack assembly with either Polyflex or PR-Superflex hose and a 2½"/6.4 cm fire dept valve with cap and chain. 1200 Series will also accommodate a portable 5 lb/2.2 kg ABC fire extinguisher when required. (Refer to Section 3000)

OPTIONAL MATERIALS:

Door and Frame available in aluminum, stainless steel, brass or bronze. When optional materials are specified, recessed, semi-recessed and surface mounted cabinets are furnished with square edges. Red powder-coated finish available. When red finish is specified for door and frame, the box remains white, except for surface mounted cabinets. Refer to page 9.

REGULARLY FURNISHED:

20 ga. box, 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge (brass pin). Steel corner seams welded and ground smooth. Recessed, semi-recessed and surface mounted cabinets are furnished with .125"/0.31 cm radiused frame. Semi-recessed and surface mounted cabinets are furnished with rolled radius. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. Wall mounting and size of cabinet as selected by model number.

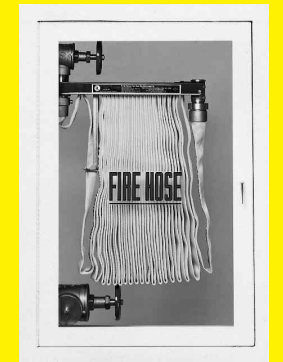


ORDERING INFORMATION

- Select cabinet model number
- Select cabinet door style (Refer to page 10)
- Select type of hose assembly (Refer to Section 2000)
- Select a portable 5 lb/2.2 kg ABC fire extinguisher, if required (Refer to Section 3000)
- Select type of fire dept valve


SPECIFICATION:

Fire hose cabinet shall be Model No. _____ as manufactured by Potter-Roemer, Cerritos, CA 800-366-FIRE; door style Suffix _____, containing Model No. _____ fire hose rack assembly. (If reducer and 1½"/3.8 cm cap is required, specify 10"/25.4 cm deep recessed can.)


1200 SERIES




RECESSED



TRIMLESS



SEMI-RECESSED



SURFACE

Model No.	Wall Mounting	MAX. CAPACITY		Box Dimensions			Overall Frame		Wall Opening Required			Trim T	Inlet Location				ADA
		Poly Flex ft. in	PR Super Flex ft. in	K in. cm	L in. cm	M in. cm	N in. cm	O in. cm	W in. cm	H in. cm	D in. cm		W in. cm	X in. cm	Y in. cm	Z in. cm	
1204	Recessed	75 22.8	50 15.2	24 61	36 91.4	8 20.3	27½ 70.4	39½ 100.9	25 63.5	37 94	8½ 21.5	¾ 1.5	4 10.1	4 10.1	4 10.1	4 10.1	Yes
1206	Recessed	100 30.4	75 22.8	24 61	40 102	8 20.3	27½ 70.4	43½ 111.1	25 63.5	41 104.1	8½ 21.5	¾ 1.5	4 10.1	4 10.1	4 10.1	4 10.1	Yes
1208	Recessed	—	100 30.4	24 61	44 111.7	8 20.3	27½ 70.4	47½ 121.2	25 63.5	45 114.3	8½ 21.5	¾ 1.5	4 10.1	4 10.1	4 10.1	4 10.1	Yes
1214	Trimless	75 22.8	50 15.2	24 61	36 91.4	8½ 22.2	27 68.6	39 100.3	25 63.5	37 94	9¼ 23.4	—	4 10.1	4 10.1	4 10.1	4 10.1	Yes
1216	Trimless	100 30.4	75 22.8	24 61	40 102	8½ 22.2	27 68.6	43 109.2	25 63.5	41 104.1	9¼ 23.4	—	4 10.1	4 10.1	4 10.1	4 10.1	Yes
1218	Trimless	—	100 30.4	24 61	44 111.7	8½ 22.2	27 68.6	47 119.3	25 63.5	45 114.3	9¼ 23.4	—	4 10.1	4 10.1	4 10.1	4 10.1	Yes
1224	Semi-Recessed	75 22.8	50 15.2	24 61	36 91.4	8 20.3	27½ 70	39½ 100.3	25 63.5	37 94	6½ 16.5	2 5	4 10.1	4 10.1	4 10.1	4 10.1	Yes
1226	Semi-Recessed	100 30.4	75 22.8	24 61	40 102	8 20.3	27½ 70	43½ 110.4	25 63.5	41 104.1	6½ 16.5	2 5	4 10.1	4 10.1	4 10.1	4 10.1	Yes
1228	Semi-Recessed	—	100 30.4	24 61	44 111.7	8 20.3	27½ 70	47½ 120.6	25 63.5	45 114.3	6½ 16.5	2 5	4 10.1	4 10.1	4 10.1	4 10.1	Yes
1254	Surface	75 22.8	50 15.2	26 66	38 96.5	9¼ 23.4	—	—	—	—	—	9¼ 23.4	—	—	—	—	No
1256	Surface	100 30.4	75 22.8	26 66	42 107	9¼ 23.4	—	—	—	—	—	9¼ 23.4	—	—	—	—	No
1258	Surface	—	100 30.4	26 66	46 115.2	9¼ 23.4	—	—	—	—	—	9¼ 23.4	—	—	—	—	No

All dimensions in English and Metric.

1300 SERIES FIRE HOSE CABINETS

FOR USE WITH • 2½x1½" / 6.4x3.8 cm FIRE HOSE RACK ASSEMBLY
• PORTABLE FIRE EXTINGUISHER

FUNCTION: 1300 Series cabinets accommodate a single 1½"/3.8 cm fire hose rack assembly with either Polyflex or PR-Superflex hose and a portable fire extinguisher.

OPTIONAL MATERIALS:


Door and Frame available in aluminum, stainless steel, brass or bronze. When optional materials are specified, recessed, semi-recessed and surface mounted cabinets are furnished with square edges. Red powder-coated finish available. When red finish is specified for door and frame, the box remains white, except for surface mounted cabinets. Refer to page 9.

REGULARLY FURNISHED:


20 ga. box, 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge (brass pin). Steel corner seams welded and ground smooth. Recessed, semi-recessed and surface mounted cabinets are furnished with .125"/0.31 cm radiused frame. Semi-recessed and surface mounted cabinets are furnished with rolled radius. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. Wall mounting and size of cabinet as selected by model number.




1300 SERIES




RECESSED



TRIMLESS



SEMI-RECESSED



SURFACE

ORDERING INFORMATION

- Select cabinet model number
- Select cabinet door style (Refer to page 10)
- Select type of hose assembly (Refer to Section 2000)
- Select type and size of extinguisher (Maximum sizes are 2½ gallon/9.4 l water, 20 lb./9 kg dry chemical, or 10 lb./4.5 kg carbon dioxide. Refer to Section 3000)

SPECIFICATION:

Fire hose cabinet shall be Model No. _____ as manufactured by Potter-Roemer, Cerritos, CA 800-366-FIRE; door style Suffix _____, containing Model No. _____ fire hose rack assembly and Model No. _____ fire extinguisher.

Model No.	Wall Mounting	MAX. CAPACITY			Box Dimensions		Overall Frame		Wall Opening Required			Trim T	Inlet Location		ADA	
		Poly Flex ft. m	PR Super Flex ft. m		K in. cm	L in. cm	M in. cm	N in. cm	O in. cm	W IDTH in. cm	H EIGHT in. cm		D EPTH in. cm	W in. cm		X in. cm
1302	Recessed	75 22.8	50 15.2		30 76.2	30 76.2	8 20.3	33½ 86	33½ 86	31 78.7	31 78.7	8½ 21.5	5/8 1.5	4 10.2	4 10.2	Yes
1304	Recessed	100 30.4	75 22.8		30 76.2	36 91.4	8 20.3	33½ 86	39½ 100.9	31 78.7	37 94	8½ 21.5	5/8 1.5	4 10.2	4 10.2	Yes
1306	Recessed	—	100 30.4		30 76.2	40 102	8 20.3	33½ 86	43½ 111.1	31 78.7	41 104.1	8½ 21.5	5/8 1.5	4 10.2	4 10.2	Yes
1312	Trimless	75 22.8	50 15.2		30 76.2	30 76.2	8 22.2	33 83.8	33 83.8	31 78.7	31 78.7	9¼ 23.4	—	4 10.2	4 10.2	Yes
1314	Trimless	100 30.4	75 22.8		30 76.2	36 91.4	8½ 22.2	33 83.8	39 99	31 78.7	37 94	9¼ 23.4	—	4 10.2	4 10.2	Yes
1316	Trimless	—	100 30.4		30 76.2	40 102	8½ 22.2	33 83.8	43 109.2	31 78.7	41 104.1	9¼ 23.4	—	4 10.2	4 10.2	Yes
1332	Semi-Recessed	75 22.8	50 15.2		30 76.2	30 76.2	8 20.3	33½ 85	33½ 85	31 78.7	31 78.7	5½ 14	2¾ 7	4 10.2	2¾ 7	Yes
1334	Semi-Recessed	100 30.4	75 22.8		30 76.2	36 91.4	8 20.3	33½ 85	9½ 100.3	31 78.7	37 94	5½ 14	2¾ 7	4 10.2	2¾ 7	Yes
1336	Semi-Recessed	—	100 30.4		30 76.2	40 102	8 20.3	33½ 85	43½ 110.4	31 78.7	41 104.1	5½ 14	2¾ 7	4 10.2	2¾ 7	Yes
1342	Semi-Recessed	75 22.8	50 15.2		30 76.2	30 76.2	8 20.3	33½ 85	33½ 85	31 78.7	31 78.7	4¼ 10.7	4¾ 12	4 10.2	2¾ 7	No
1344	Semi-Recessed	100 30.4	75 22.8		30 76.2	36 91.4	8 20.3	33½ 85	9½ 100.3	31 78.7	37 94	5½ 10.7	4¾ 12	4 10.2	2¾ 7	No
1346	Semi-Recessed	—	100 30.4		30 76.2	40 102	8 20.3	33½ 85	43½ 110.4	31 78.7	41 104.1	5½ 10.7	4¾ 12	4 10.2	2¾ 7	No
1352	Surface	75 22.8	50 15.2		32 81.3	32 81.3	9¼ 23.4	—	—	31	31	—	9¼ 23.4	—	—	No
1354	Surface	100 30.4	75 22.8		32 81.3	38 96.5	9¼ 23.4	—	—	31	37	—	9¼ 23.4	—	—	No
1356	Surface	—	100 30.4		32 81.3	42 106.6	9¼ 23.4	—	—	31	41	—	9¼ 23.4	—	—	No

1400 SERIES FIRE HOSE CABINETS

POTTER-ROEMER



A Division of Smith Industries, Inc.

FOR USE WITH

- 2½x1½" / 6.4x3.8 cm FIRE HOSE RACK ASSEMBLY
- PORTABLE FIRE EXTINGUISHER

FUNCTION: 1400 Series cabinets accommodate a single 2½"x1½"/6.4x3.8 cm fire hose rack assembly with either Polyflex or PR-Superflex hose and a portable fire extinguisher.

OPTIONAL MATERIALS:

Door and Frame available in aluminum, stainless steel, brass or bronze. When optional materials are specified, recessed, semi-recessed and surface mounted cabinets are furnished with square edges. Red powder-coated finish available. When red finish is specified for door and frame, the box remains white, except for surface mounted cabinets. Refer to page 9.

REGULARLY FURNISHED:

20 ga. box, 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge (brass pin). Steel corner seams welded and ground smooth. Recessed, semi-recessed and surface mounted cabinets are furnished with .125"/0.31 cm radiused frame. Semi-recessed and surface mounted cabinets are furnished with rolled radius. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. Wall mounting and size of cabinet as selected by model number.



ORDERING INFORMATION


- Select cabinet model number
- Select cabinet door style (Refer to page 10)
- Select type of hose rack assembly (Refer to Section 2000)
- Select type and size of extinguisher (Maximum sizes are 2½ gallon/9.4 l water, 20 lb./9 kg dry chemical, or 10 lb./4.5 kg carbon dioxide. Refer to Section 3000)

SPECIFICATION:


Fire hose cabinet shall be Model No. _____ as manufactured by Potter-Roemer, Cerritos, CA 800-366-FIRE; door style Suffix _____, containing Model No. _____ fire hose rack assembly and Model No. _____ fire extinguisher.

Model No.	Wall Mounting	MAX. CAPACITY			Box Dimensions			Overall Frame		Wall Opening Required			Trim T	Inlet Location		ADA
		Poly Flex ft. m	PR Super Flex ft. m	K in. cm	L in. cm	M in. cm	N in. cm	O in. cm	W I D T H in. cm	H E I G H T in. cm	D E P T H in. cm	W in. cm		X in. cm		
1402	Recessed	75 22.8	50 15.2	30 76.2	30 76.2	8 20.3	33½ 86	33¼ 86	33½ 78.7	31 78.7	8½ 21.5	5/8 1.5	4 10.2	4 10.2	Yes	
1404	Recessed	100 30.4	75 22.8	30 76.2	36 91.4	8 20.3	33½ 86	39¼ 100.9	39½ 78.7	37 94	8½ 21.5	5/8 1.5	4 10.2	4 10.2	Yes	
1406	Recessed	—	100 30.4	30 76.2	40 102	8 20.3	33½ 86	43¼ 111.1	43½ 78.7	41 104.1	8½ 21.5	5/8 1.5	4 10.2	4 10.2	Yes	
1412	Trimless	75 22.8	50 15.2	30 76.2	30 76.2	8¼ 22.2	33 83.8	33 83.8	31 78.7	37 78.7	9¼ 23.4	—	4 10.2	4 10.2	Yes	
1414	Trimless	100 30.4	75 22.8	30 76.2	36 91.4	8¼ 22.2	33 83.8	39 99	31 78.7	31 94	9¼ 23.4	—	4 10.2	4 10.2	Yes	
1416	Trimless	—	100 30.4	30 76.2	40 102	8¼ 22.2	33 83.8	43 109.2	31 78.7	37 104.1	9¼ 23.4	—	4 10.2	4 10.2	Yes	
1432	Semi-Recessed	75 22.8	50 15.2	30 76.2	30 76.2	8 20.3	33½ 85	33½ 85	31 78.7	41 78.7	5½ 15.9	2¾ 7	4 10.2	2¼ 10.2	Yes	
1434	Semi-Recessed	100 30.4	75 22.8	30 76.2	36 91.4	8 20.3	33½ 85	39¼ 100.3	31 78.7	37 94	5½ 15.9	2¾ 7	4 10.2	2¼ 10.2	Yes	
1436	Semi-Recessed	—	100 30.4	30 76.2	40 102	8 20.3	33½ 85	43¼ 110.4	31 78.7	31 104.1	5½ 15.9	2¾ 7	4 10.2	2¼ 10.2	Yes	
1452	Surface	75 22.8	50 15.2	32 81.3	32 81.3	9¼ 23.4	—	—	—	—	—	9¼ 23.4	—	—	No	
1454	Surface	100 30.4	75 22.8	32 81.3	38 96.5	9¼ 23.4	—	—	—	—	—	9¼ 23.4	—	—	No	
1456	Surface	—	100 30.4	32 81.3	42 106.6	9¼ 23.4	—	—	—	—	—	9¼ 23.4	—	—	No	


1400 SERIES




RECESSED



TRIMLESS



SEMI-RECESSED



SURFACE

All dimensions in English and Metric.

1500 SERIES FIRE HOSE CABINETS

FOR USE WITH


- 1½" / 3.8 cm FIRE HOSE RACK ASSEMBLY
- PORTABLE FIRE EXTINGUISHER
- 2½" / 6.4 cm FIRE DEPT VALVE

FUNCTION: 1500 Series cabinets accommodate a single 1½" / 3.8 cm fire hose rack assembly with either Polyflex or PR-Superflex hose and a portable fire extinguisher and a 2½" / 6.4 cm fire dept valve with cap and chain.





OPTIONAL MATERIALS: Door and Frame available in aluminum, stainless steel, brass or bronze. When optional materials are specified, recessed, semi-recessed and surface mounted cabinets are furnished with square edges. Red powder-coated finish available. When red finish is specified for door and frame, the box remains white, except for surface mounted cabinets. Refer to page 9.

REGULARLY FURNISHED:

20 ga. box, 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge (brass pin). Steel corner seams welded and ground smooth. Recessed, semi-recessed and surface mounted cabinets are furnished with .125" / 0.31 cm radiused frame. Semi-recessed and surface mounted cabinets are furnished with rolled radius. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. Wall mounting and size of cabinet as selected by model number.



1500 SERIES



ORDERING INFORMATION

- Select cabinet model number
- Select cabinet door style (Refer to page 10)
- Select type of hose assembly (Refer to Section 2000)
- Select type and size of extinguisher (Maximum sizes are 2½ gallon / 9.4 l water, 20 lb. / 9 kg dry chemical, or 10 lb. / 4.5 kg carbon dioxide. Refer to Section 3000)
- Select type of fire dept valve with cap and chain (Refer to Section 4000)

SPECIFICATION:

Fire hose cabinet shall be Model No. _____ as manufactured by Potter-Roemer, Cerritos, CA 800-366-FIRE; door style Suffix _____, containing Model No. _____ fire hose rack assembly and Model No. _____ fire extinguisher and Model No. _____ fire dept valve with Model No. _____ cap and chain. (If reducer and 1½" / 3.8 cm cap is required, specify 10" / 25.4 cm deep recessed can.)

Model No.	Wall Mounting	MAX. CAPACITY		Box Dimensions			Overall Frame		Wall Opening Required			Trim T	Inlet Location				ADA
		Poly Flex ft. m	Super Flex ft. m	K in. cm	L in. cm	M in. cm	N in. cm	O in. cm	W I D T H in. cm	H E I G H T in. cm	D E P T H in. cm		W in. cm	X in. cm	Y in. cm	Z in. cm	
1504	Recessed	75 22.8	50 15.2	30 76.2	36 91.4	8 20.3	33 3/4 86	39 1/4 100.9	31 78.7	37 94	8 1/2 21.5	5/8 1.5	4 10.2	4 10.2	4 10.2	4 10.2	Yes
1506	Recessed	100 30.4	75 22.8	30 76.2	40 102	8 20.3	33 3/4 86	43 1/4 111.1	31 78.7	41 104.1	8 1/2 21.5	5/8 1.5	4 10.2	4 10.2	4 10.2	4 10.2	Yes
1508	Recessed	—	100 30.4	30 76.2	44 111.7	8 20.3	33 3/4 86	47 1/4 121.2	31 78.7	45 114.3	8 1/2 21.5	5/8 1.5	4 10.2	4 10.2	4 10.2	4 10.2	Yes
1514	Trimless	75 22.8	50 15.2	30 76.2	36 91.4	8 1/4 22.2	33 83.8	39 99	31 78.7	37 94	9 1/4 23.4	—	4 10.2	4 10.2	4 10.2	4 10.2	Yes
1516	Trimless	100 30.4	75 22.8	30 76.2	40 102	8 1/4 22.2	33 83.8	43 109.2	31 78.7	41 104.1	9 1/4 23.4	—	4 10.2	4 10.2	4 10.2	4 10.2	Yes
1518	Trimless	—	100 30.4	30 76.2	44 111.7	8 1/4 22.2	33 83.8	47 119.3	31 78.7	45 114.3	9 1/4 23.4	—	4 10.2	4 10.2	4 10.2	4 10.2	Yes
1534	Semi-Recessed	75 22.8	50 15.2	30 76.2	36 91.4	8 20.3	33 1/2 85	39 1/2 100.3	31 78.7	37 94	6 1/4 15.9	2 3/4 7	4 10.2	4 10.2	4 10.2	4 10.2	Yes
1536	Semi-Recessed	100 30.4	75 22.8	30 76.2	40 102	8 20.3	33 1/2 85	43 1/2 110.4	31 78.7	41 104.1	6 1/4 15.9	2 3/4 7	4 10.2	4 10.2	4 10.2	4 10.2	Yes
1538	Semi-Recessed	—	100 30.4	30 76.2	44 111.7	8 20.3	33 1/2 85	47 1/2 120.6	31 78.7	45 114.3	6 1/4 15.9	2 3/4 7	4 10.2	4 10.2	4 10.2	4 10.2	Yes
1554	Surface	75 22.8	50 15.2	32 81.3	38 96.5	9 1/4 23.4	—	—	—	—	—	9 1/4 23.4	—	—	—	—	No
1556	Surface	100 30.4	75 22.8	32 81.3	42 106.6	9 1/4 23.4	—	—	—	—	—	9 1/4 23.4	—	—	—	—	No
1558	Surface	—	100 30.4	32 81.3	46 116.8	9 1/4 23.4	—	—	—	—	—	9 1/4 23.4	—	—	—	—	No

1600 SERIES FIRE HOSE CABINETS

POTTER-ROEMER



A Division of Smith Industries, Inc.

BUBBLE TYPE FOR USE WITH

- 2½x1½" / 6.4x3.8 cm FIRE HOSE RACK ASSEMBLY
- PORTABLE FIRE EXTINGUISHER

FUNCTION: 1600 Series cabinets accommodate a single 1½"/3.8 cm fire hose rack assembly with either Polyflex or PR-Superflex hose and a portable fire extinguisher. All bubble door styles have a projecting convex polycarbonate panel enclosing the extinguisher area of the cabinet.

OPTIONAL MATERIALS:

Door and Frame available in aluminum, stainless steel, brass or bronze. When optional materials are specified, recessed, semi-recessed and surface mounted cabinets are furnished with square edges. Red powder-coated finish available. When red finish is specified for door and frame, the box remains white, except for surface mounted cabinets. Refer to page 9.

REGULARLY FURNISHED:

20 ga. box, 20 ga. tubular steel door with 18 ga. frame and a continuous steel hinge (brass pin). Steel corner seams welded and ground smooth. Recessed, semi-recessed and surface mounted cabinets are furnished with .125"/0.31 cm radiused frame. Semi-recessed and surface mounted cabinets are furnished with rolled radius. Door and frame finished with a powder-coated, electrostatically-applied, thermally-fused, recoatable white polyester finish. Clear, vacuum-formed, polycarbonate bubble. Wall mounting and size of cabinet as selected by model number.

OPTIONAL COLOR BUBBLE:

–S Smoke Grey

SPECIFY: Add Suffix to cabinet Model Number.




ORDERING INFORMATION

- Select cabinet model number
- Select cabinet door style (Refer to page 10)
- Select type of hose assembly (Refer to Section 2000)
- Select type and size of extinguisher (Maximum sizes are 2½ gallon/9.4 l water, 20 lb./9 kg dry chemical, or 10 lb./4.5 kg carbon dioxide. Refer to Section 3000)


SPECIFICATION:

Fire hose cabinet shall be Model No. _____ as manufactured by Potter-Roemer, Cerritos, CA 800-366-FIRE; door style Suffix _____, containing Model No. _____ fire hose rack assembly and Model No. _____ fire extinguisher.


Model No.	Wall Mounting	MAX. CAPACITY		Box Dimensions			Overall Frame		Wall Opening Required			Projection S	Trim T	Inlet Location		ADA
		Poly Flex ft. m	Super Flex ft. m	K in. cm	L in. cm	M in. cm	N in. cm	O in. cm	WIDTH in. cm	HEIGHT in. cm	DEPTH in. cm			W in. cm	X in. cm	
1602	Recessed	75 22.8	50	30 30.4	30 81.3	4 1/4 106.6	33 3/4 15.2	33 3/4 85.6	31 78.7	31 78.7	4 1/2 11.1	3 7.6	1/2 1.2	4 10.2	2 1/2 6.4	Yes
1604	Recessed	100 30.4	75 15.2	30 76.2	36 76.2	4 1/4 10.8	33 3/4 85.6	39 3/4 100.9	31 78.7	37 94	4 1/2 11.1	3 7.6	1/2 1.2	4 10.2	2 1/2 6.4	Yes
1606	Recessed	—	100 22.8	30 76.2	40 91.4	4 1/4 10.8	33 3/4 85.6	43 3/4 111.1	31 78.7	41 104.1	4 1/2 11.1	3 7.6	1/2 1.2	4 10.2	2 1/2 6.4	Yes
1612	Trimless	75 22.8	50 30.4	30 76.2	30 102	5 10.8	33 85.6	33 83.8	31 78.7	31 78.7	5 1/4 14.6	3 7.6	—	4 10.2	2 1/2 6.4	Yes
1614	Trimless	100 30.4	75 15.2	30 76.2	36 76.2	5 12.7	33 83.8	39 99	31 78.7	37 94	5 1/4 14.6	3 7.6	—	4 10.2	2 1/2 6.4	Yes
1616	Trimless	—	100 22.8	30 76.2	40 91.4	5 12.7	33 83.8	43 109.2	31 78.7	41 104.1	5 1/4 14.6	3 7.6	—	4 10.2	2 1/2 6.4	Yes
1652	Surface	75 22.8	50 30.4	32 76.2	32 102	6 12.7	83.8	—	—	—	—	3 7.6	6 15.2	—	—	No
1654	Surface	100 30.4	75 15.2	32 81.3	38 81.3	6 15.2	—	—	—	—	—	3 7.6	6 15.2	—	—	No
1656	Surface	—	100 22.8	32 81.3	42 96.5	6 15.2	—	—	—	—	—	3 7.6	6 15.2	—	—	No



RECESSED



TRIMLESS



SURFACE