

# SCT Cooling Tower



## Description & Features:

- Designed to protect instruments in high temperature applications
- May be used for process media temperatures up to 570°F, and can reduce the media temperature by as much as 500°F\*
- 1 year warranty

## Applications:

- May be utilized in various applications
- When used with a diaphragm seal, the pressure rating of the diaphragm seal must be acknowledged


Note: Pressure gauge sold separately

Specifications	
<b>Body</b>	316 SS
<b>Maximum Operating Pressure</b>	1,500 psi
<b>Maximum Process Temperature</b>	570°F (300°C)
<b>Connection</b>	1/4" NPT male x 1/4" NPT female 1/2" NPT male x 1/2" NPT female

## Order Codes (products in bold are normally in stock)

<b>1/4" NPT Male x 1/4" NPT Female</b>	<b>1/2" NPT Male x 1/2" NPT Female</b>
<b>SCT-400</b>	<b>SCT-500</b>

Note: Other connections available upon request

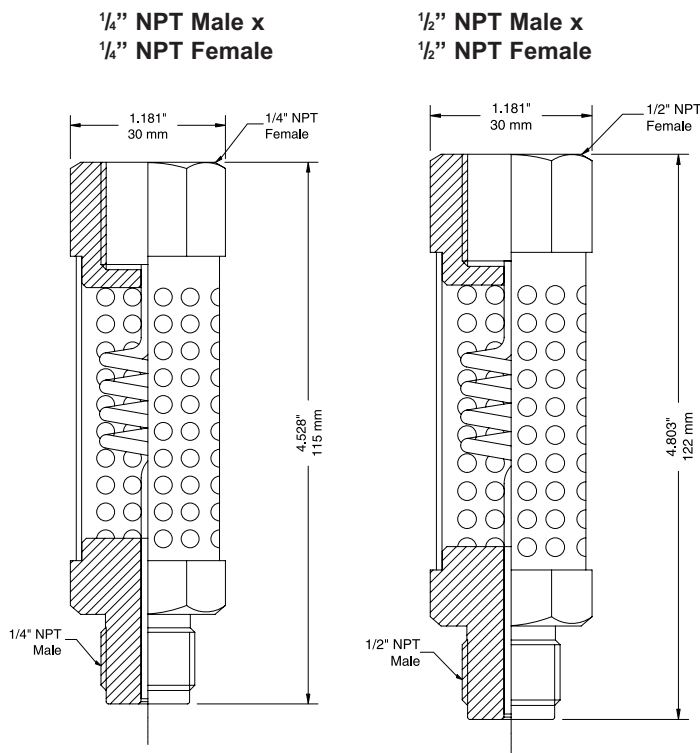

## Series Number (for custom, non-standard product)



SERIES	CONNECTION SIZE	CONNECTION THREAD
S	1/4"	NPT
C	3/8"	BSP
T	1/2"	BSPT
		N
		B
		T

\*Degree of cooling is dependent on ambient conditions