

SPECIALTY PRODUCTS

WFLV Series

Flash Recovery Vessel

| | |
|--------------------------------|-------------------------|
| Model | WFLV |
| Sizes | 6", 8", 12", 16" |
| Connections | 150 RF, NPT |
| Body Material | Carbon Steel |
| PMO Max. Operating Pressure | 150 PSIG |
| TMO Max. Operating Temperature | 366°F |
| PMA Max. Allowable Pressure | 150 PSIG @ 562°F |

TYPICAL APPLICATION

The **WFLV** flash recovery vessels are installed in condensate return systems in order to capture and utilize the flash steam coming off of the hot condensate. This flash steam is typically piped away for use on low pressure steam processes.

HOW TO SIZE


Use Table 1 to determine amount of Flash Steam that will be generated by the hot pressurized condensate. The percent of Flash Steam formed is found where Condensate Pressure (PSIG) and Flash Tank Pressure intersect.

Multiply your Condensate Load by the decimal equivalent of the Flash Steam Percent to determine the amount of Flash Steam in lbs/hr. Then, using Figure 1 to determine Flash Tank Size required:

Example: Condensate Pressure **100 PSIG**
 Flash Tank Pressure **20 PSIG**
 Condensate Load **8,000**
 % Flash Steam **8.7 %** from chart
 Decimal Equivalent % Flash Steam = **.087**

.087 x 8000 = 696 lbs/hr of flash steam


Choose: **12" FLASH TANK**

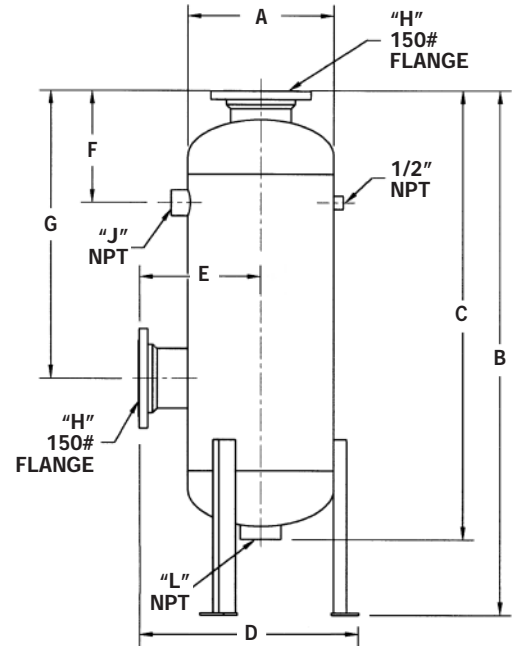

PERCENT (%) FLASH STEAM

Produced when condensate is discharged to atmosphere or into a flash tank controlled at various pressures

| Condensate Pressure (PSIG) | Flash Tank Pressure (PSIG) | | | | | | | | | |
|----------------------------|----------------------------|------|------|------------|------|------|------|------|------|--|
| | 0 | 5 | 10 | 20 | 30 | 40 | 60 | 80 | 100 | |
| 5 | 1.6 | 0.0 | | | | | | | | |
| 10 | 2.9 | 1.3 | 0.0 | | | | | | | |
| 15 | 3.9 | 2.4 | 1.1 | | | | | | | |
| 20 | 4.9 | 3.3 | 2.1 | 0.0 | | | | | | |
| 30 | 6.5 | 5.0 | 3.7 | 1.7 | 0.0 | | | | | |
| 40 | 7.8 | 6.3 | 5.1 | 3.0 | 1.4 | 0.0 | | | | |
| 60 | 10.0 | 8.5 | 7.3 | 5.3 | 3.7 | 2.3 | 0.0 | | | |
| 80 | 11.8 | 10.3 | 9.1 | 7.1 | 5.5 | 4.2 | 1.9 | 0.0 | | |
| 100 | 13.3 | 11.8 | 10.6 | 8.7 | 7.1 | 5.8 | 3.5 | 1.6 | 0.0 | |
| 125 | 14.9 | 13.5 | 12.3 | 10.4 | 8.8 | 7.5 | 5.3 | 3.4 | 1.8 | |
| 150 | 16.3 | 14.9 | 13.7 | 11.8 | 10.3 | 9.0 | 6.8 | 4.9 | 3.3 | |
| 200 | 18.7 | 17.3 | 16.2 | 14.3 | 12.8 | 11.5 | 9.4 | 7.6 | 6.0 | |
| 250 | 20.8 | 19.4 | 18.2 | 16.4 | 14.9 | 13.7 | 11.5 | 9.8 | 8.2 | |
| 300 | 22.5 | 21.2 | 20.0 | 18.2 | 16.8 | 15.5 | 13.4 | 11.7 | 10.2 | |
| 350 | 24.1 | 22.8 | 21.7 | 19.9 | 18.4 | 17.2 | 15.1 | 13.4 | 11.9 | |
| 400 | 25.6 | 24.2 | 23.1 | 21.4 | 19.9 | 18.7 | 16.7 | 15.0 | 13.5 | |

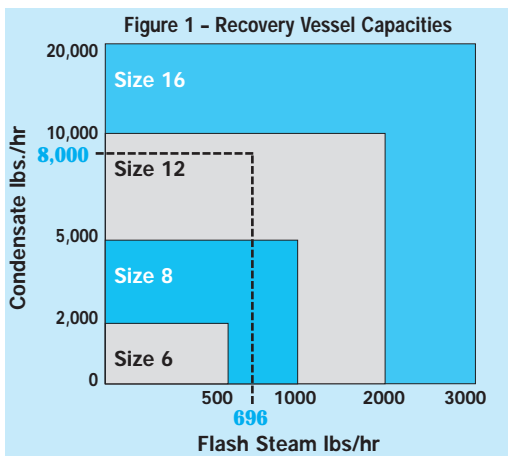

DIMENSIONS & WEIGHTS – inches/pounds

| Size | A | B | C | D | E | F | G | H | J | L | Weight (lbs) |
|------|--------------------------------|--------------------------------|--------------------------------|----|--------------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------|
| 6" | 6 ⁵ / ₈ | 47 | 38 ¹ / ₂ | 12 | 8 | 9 | 25 ¹ / ₂ | 2 ¹ / ₂ | 3/4 | 1 ¹ / ₂ | 75 |
| 8" | 8 ⁵ / ₈ | 48 | 39 ³ / ₄ | 13 | 8 ¹ / ₂ | 9 ¹ / ₂ | 25 ⁵ / ₈ | 4 | 3/4 | 2 | 150 |
| 12" | 12 ³ / ₄ | 49 ¹ / ₂ | 41 ¹ / ₄ | 21 | 11 ³ / ₄ | 11 ¹ / ₂ | 26 | 5 | 1 ¹ / ₂ | 3 | 165 |
| 16" | 16 | 58 | 50 | 24 | 13 ³ / ₈ | 12 ¹ / ₂ | 32 | 6 | 2 | 3 | 215 |