

CMDR counterflow cooling towers



[Background]


GEA Polacel

GEA Polacel is a company of the GEA Group AG. The GEA Group, headquartered in Bochum, Germany, is a globally successful technology group with more than 250 companies in 50 countries.

- One contact person for all solutions
- Globally active in more than 40 countries
- Native speakers speak your language
- Individual solutions
- Maximum availability, security of operation and system efficiency

The company now focuses on specialty mechanical engineering – especially process engineering and equipment. GEA Group technologies are applied in the food, chemical and petrochemical industries, the energy sector, air treatment and shipbuilding as well as the pharmaceutical and cosmetic industries. The GEA Group is one of the world's market and technology leaders in 90 per cent of its businesses.

GEA is a solid foundation for the GEA Polacel activities and it provides us with greater scope. Good contacts with affiliated organizations that are leaders in our field provide an ongoing stimulus to our own development. This is what makes GEA Polacel a leader in the introduction of technological improvements.

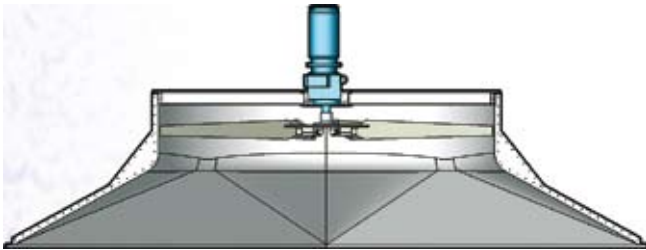


[System's functions]

The effect of counterflow

CMDR cooling towers work on the principle of counterflow. This means that the water flows down while the air is pulled upwards by a fan.

As the water flows further through the system, the air it encounters is fresher, in other words cooler and less saturated with moisture. Counterflow cooling towers can approach the wet bulb temperature better compared to crossflow cooling towers.


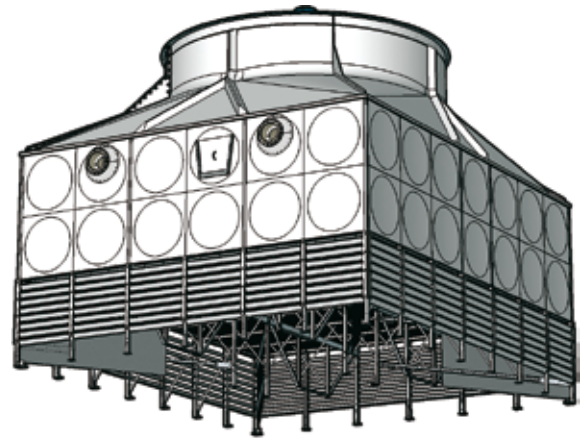


[Know how]

Polacel CMDR cooling towers

Polacel designs, manufactures and maintains cooling towers for process and climate cooling. Our energy-efficient and environmentally-friendly cooling water generators stand out because of the complete quality policy we employ.

The Polacel CMDR systems combine a high cooling capacity with low energy consumption. The modules are supplied ready to use and they are easy to adjust to cooling requirements and the available space, whether they are used singly or in series. The cooling performance of these cooling towers is optimal and operation is problem free. With a 95%+ saving in water, the efficient CMDR systems are the best choice for man and his environment.

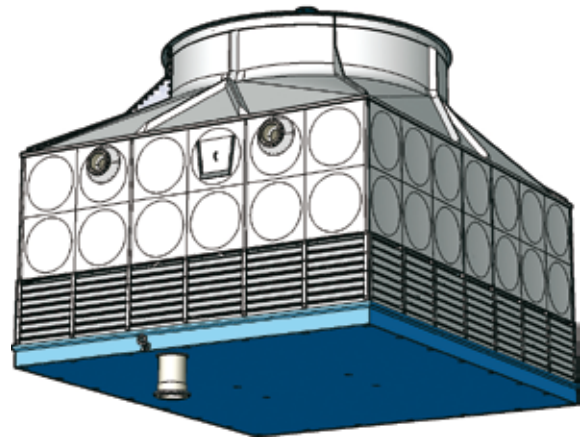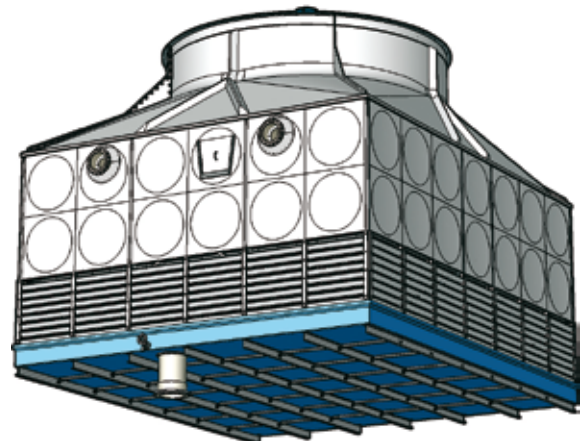



CMDR cooling tower type 460
Car manufacturer in Germany



CMDR cooling tower type 380
Chemical Plant in Germany



CMDR cooling tower type 630
Chemical Plant in Germany

[Maximum efficiency]

Cooling performance measured: the wet bulb

The wet bulb temperature is in fact the lowest temperature that can be achieved by air cooling in any particular set of circumstances.

This temperature can be measured by wrapping a glass thermometer in a piece of cotton that has been drenched in water and placing it in a stream of air. The water will evaporate and lose heat (sweating while taking exercise has the same function and makes a 'cooling tower' out of our skin). The wet bulb temperature is therefore lower than the ambient temperature.

Cooling towers try to approach this achievable minimum temperature using as little energy and as efficiently as possible. The GEA Polacel CMDR range succeeds in doing this and combines maximum efficiency with low power consumption, and therefore minimal costs.

[Modular system]

Modules to size

The cooling water temperatures (inlet and outlet), the wet bulb temperature, noise and the water load are the four most important factors in the selection of a cooling tower.

GEA Polacel makes an inventory of the requirements together with the client and uses this inventory as the basis of the design for a suitable solution. The modular CMDR system can be extended, and there are standard solutions available for different capacity needs. GEA Polacel engineers make customized changes to meet special requirements.



[Silentness]

Noise reduction

As a rule cooling towers are outdoors, and usually on a roof or at the edge of the site. The noise produced by the cooling tower caused by, among other things, the fan, falling water, the electrical motor or geared motor, can therefore present a problem.

GEA Polacel has put a number of developments into practice that reduce the noise nuisance. Larger fans (lower speed, less noise and higher efficiency), floating silencers to reduce the noise of splashing and other noise reducing measures combat the different sources of noise.

GEA Polacel provides a detailed picture of the nature and level of the noise produced by means of detailed calculations. GEA Polacel can also make calculations for all cooling towers beforehand in relation to the requirements laid down in environmental permits.

Structural features

The advanced design engineering has also resulted in a number of special structural advantages:

- Only a minimum number of support points are necessary as a result of the self-supporting foundations and the high internal stiffness
- Completely transportable, ready to be installed
- The Polacel frost-proof water tank can withstand sub-zero temperatures
- The CMDR system can also be installed on existing water basins
- The extendable modular system has virtually no limitations in terms of form and capacity
- All structural design premises are analyzed and tested by means of dynamic calculations and computer studies beforehand



CMDR cooling tower type 630
Lysine factory in Denmark

GEA Polacel engineering

The CMDR design has a number of other special and exclusive features:

- The design of the fan section and the large fans ensure lower energy consumption and a substantial reduction in noise
- The CMDR modules are supplied with a direct-drive or indirect-drive fan
- The water distribution system, the spray nozzles and the cooling modules can be geared to the water used and guarantee maximum contact with the air being drawn in
- The air inlet louvres optimize the air inflow and minimize water losses through splashing
- Floating silencers minimize noise caused by falling water
- The designs take into account the desired variations in capacity, appropriate measures during maintenance and other user wishes

CMDR cooling tower type 630
Shopping center in Dubai



[High standards]

The security of quality

GEA Polacel designs and manufactures cooling towers with long lifetimes and minimal maintenance needs.

This is achieved through the materials used - stainless steel combined with glass fibre and plastic - the sound design and the experience of our engineers. 'Cheap and cheerful' solutions, such as a fan with a V-belt drive or painted panels, are avoided.

The result is a cooling tower that is low maintenance, energy efficient and able to supply constant excellent problem-free performance.



CMDR cooling tower type 630
Green Community in United Arab Emirates

[All around support service]

Advice and service

GEA Polacel builds cooling modules that meet precise specifications. Our sales engineers give advice, analyze your wishes and take personal responsibility for delivery so that your order is completely in line with your instructions.

GEA Polacel's own service organization specializes in cooling tower maintenance. Irrespective of brand or version, the maintenance specialists know all the ins and outs of the whole technical area and are involved in the latest developments. GEA Polacel has broad experience in cooling tower maintenance. We work in accordance with the requirements described by ISO, VCA, VDMA, CTI and Eurovent. The technicians can carry out the maintenance needed in virtually every location and in practically any time frame.



CMDR cooling tower type 135

Companies of the Thermal Engineering Division

USA
 GEA Power Cooling Inc. (GPC)
 Lakewood, USA
www.geapowercooling.com
 GEA Rainey Corporation (GRC)
 Catoosa, USA
www.gearainey.com
GEA Polacel Cooling Towers LLC (PCLUS)
 Houston, USA
www.polacel.com
 GEA Power Cooling Inc. (GPC)
 Clearwater, USA
www.geapowercooling.com

EUROPE
 GEA Energietechnik Ltd. U.K.
 Staffordshire, Great Britain
www.gea-energietechnik.com
 2H Aqua Ltd. UK (ZHKUK)
 Huntingdon, Great Britain
www.gea-2h.com
 GEA Batignolles Technologies Thermiques S.A.S. (BTT)
 Nantes, France
www.btt-nantes.com
 GEA Airflow Services S.A.R.L. (AFS)
 Nantes, France
www.btt-nantes.com
 GEA Ibérica S.A. (GIB)
 Igorre, Spain
www.geaibericasa.es
 GEA Scambiatori di calore S.r.l. (GSC), Monvalle, Italy
www.gea-sc.com
 GEA EGI Contracting/Engineering Co. Ltd. (EGI)
 Budapest, Hungary
www.egi.hu
GEA Polacel Cooling Towers B.V. (PCL)
 Doetinchem, Netherlands
www.polacel.nl
 GEA 2H Water Technologies GmbH (ZHK)
 Wettingen, Germany
www.gea-2h.com
 GEA Luftkühler GmbH (GLK)
 Herne, Germany
www.gea-luftkuehler.de
 GEA Energietechnik GmbH (GET)
 Herne, Germany
www.gea-energietechnik.com
 GEA Industrial Services Ltd.
 Willenhall, Great Britain
www.gea-industrialservices.com

HEAD OFFICE E-DIVISION
 GEA Energy Technology GmbH (GEM), Bochum, Germany
www.gea-energy.com

MEXICO
 GEA Power Cooling de Mexico S. de R.L. de C.V. (GPM)
 San Luis Potosi, Mexico
www.geapowercooling.com.mx

BRASIL
 GEA Sistemas de Resfriamento Ltda. (GSR)
 Alphaville, Brasil
www.geasr.com.br

AFRICA
 GEA Nilenca Ltd. (GNL)
 Germiston, South Africa
www.geanilenca.co.za
 GEA Aircooled Systems (Pty.) Ltd. (GAS)
 Germiston, South Africa
www.gea.co.za

RUSSIA
 OOO GEA Energietechnik Moskau
 Moskau, Russia
www.gea-energietechnik.com

MIDDLE EAST
GEA Polacel Cooling Towers FZCO
 Dubai, U.A.E.
www.polacel.com
 GEA Batignolles Technologies Thermiques Qatar LLC. (BTQ)
 Doha, Qatar
www.btt-nantes.com

INDIA
 GEA Cooling Tower Technology (India) Pvt. Ltd. (GCT)
 Teynampet Chennai, India
www.gea-energietechnik.com
 Beijing GEA Energietechnik Co., Ltd. (GBJ)
 Beijing, China
www.gea-energietechnik.com
 GEA Power Cooling Technology Co., Ltd. (GPCT)
 Langfang, China
www.gea-energietechnik.com
 GEA EGI Cooling Systems Trading (Beijing) Co., Ltd. (EGIC)
 Beijing, China
www.egi.hu
 GEA Batignolles Thermal Technologies (Changshu) Co., Ltd. (BTTC)
 Changshu, China
www.btt-nantes.com

CHINA



Thermal Engineering

GEA Polacel Cooling Towers B.V.

Vlijstraat 25 · NL-7000 AG Doetinchem · The Netherlands
 Telephone +31 314 37 14 14 · Telefax +31 314 34 48 84
www.polacel.nl · sales@polacel.nl

