



EDCO PCB1B BASE SOLD SEPARATELY

## Edco PHC Series Two-Pair Signaling Circuit Protector (Modular)

The Edco PHC Series is designed to protect two pairs of wires specifically where operating currents can be as high as 5 Amps. Electrically, the Edco PHC Series is a rugged series hybrid implementing a staged complement of MOVs, copper wound inductors and Silicon Avalanche Diodes. This design reduces series resistance to 0.2 Ohms per pair.

The Edco PHC modules plug into a base assembly (Edco PCB1B). The base assembly can be mounted to any flat surface and should be located as close as practical to the protected equipment. Terminal 1 and/or terminal 10 should be connected to Building-Approved Ground with 12 or 10 gauge solid wire.

### Features

- Three-stage protection
- Differential protection
- Common mode protection
- Plug-in module
- Automatic recovery
- Fast response time
- Continuous current up to 5 Amps
- UL 497B listed
- Requires Edco PCB1B base
- PC642PTU (Pass Thru Unit) available for troubleshooting
- 5 year warranty


### General Technical Specifications

Part Number	Edco PHC Series
Operating Voltage	12, 18, 24, 30, 36, 52, 60, 120 VDC
Clamping Voltage	15, 20, 30, 36, 43, 60, 70, 150 VDC
Operating Current	5A
Peak Surge Current	10 kA (8 x 20 μs)
Frequency Range	0 to 10 MHz
Insertion Loss	< 0.1 dB at 10 MHz
SPD Technology	MOV, SAD, w/Series Inductor
Connection Type	Terminal block w/compression lugs Terminals accept up to 10 AWG
Operating Temperature	-40°C to +85°C
Dimensions (Inches)	3.7H x 1.75W x 2.375L (PHC + PCB1B Base)
Weight	8 oz
Certifications	UL 497B

### Applications Part Number


24V Horn, Strobe, Bell:	PHC-043 & PCB1B
70V Speaker Lines:	PHC-SP70 & PCB1B

### Terminal Assignments

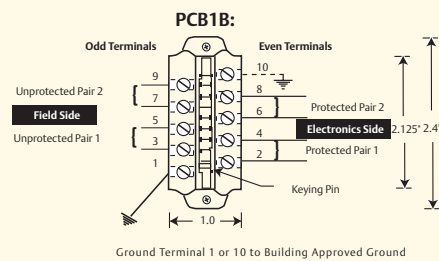

DO NOT daisy chain grounds. NOT intended for shield termination. Install ground in accordance with all applicable codes.

### Dimensions



PCB1B

### Ordering Information

#### How to Specify the Appropriate Model

