


## CB5010PL



**5 Coax**


## Plenum-Flex® Multi-Channel Coax Cable

### Common features:

- 5 coaxes
- Safety approval: UL1581
- Nominal O.D.: 0.32in (8.13mm)
- Jacket color: gray
- Impedance: 75 ohms
- Shield: Tinned copper/Aluminum (In)/Lead free polypropylen low smoke tape
- Coax conductor: 26WG 7/34 tinned copper
- Available Spool length: 500ft (152.4m) and 1000ft (304.8m)

*Custom length BNC/VGA cables built in 24hrs*

## CB5100PL

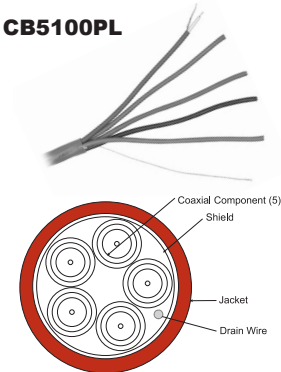

**5 Coax**


## Plenum-Flex Super High Resolution Coax Cable

### Common features:

- 5 coaxes
- Safety approval: ULCL2P, CMP
- Nominal O.D.: 0.52in (13.21mm)
- Jacket color: gray
- Impedance: 75 ohms
- Shield: Tin plated copper/Aluminum/polyester tape
- Coax conductor: 22WG 7/30 silver plated copper
- Available Spool length: 1000ft (304.8m)

*Custom length BNC/VGA cables built in 24hrs*

## CB3100SV



**S-Video**

## Round S-Video Cable

### Common features:

- 2 coaxes
- Safety approval: UL1685
- Nominal O.D.: 0.27in (6.86mm)
- Jacket color: black
- Impedance: 75 ohms
- Shield: Tinned copper/Aluminum (In)/polyester tape
- Coax conductor: 26 AWG 7/34 tinned copper
- Available Spool length: 500ft (152.4m) and 1000ft (304.8m)

*Custom length S-VIDEO cables built in 24hrs*