



HALCYON Panels with *CLIMAPLUS* Performance/  
DONN FINELINE 1/8 DXFF Suspension System

**LEED Credits**

Recycled Content: 40% – 42%  
*CLIMAPLUS* No-Sag Warranty

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials <sup>1</sup>	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
	●	●			●	●

**Features and Benefits**


- Exceptional noise reduction with NRC values up to 1.00 for open-plan offices.
- Fine, monolithic texture.
- Light reflectance of .88 is part of an “indirect lighting” solution.
- Low-maintenance panels look new for years to come.
- *CLIMAPLUS*™ 30-year lifetime warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a *DONN*® brand suspension system.

**Applications**

- Open-plan offices
- Offices with indirect lighting
- Reception and lobby areas
- Libraries

**Substrate**

- Fiberglass

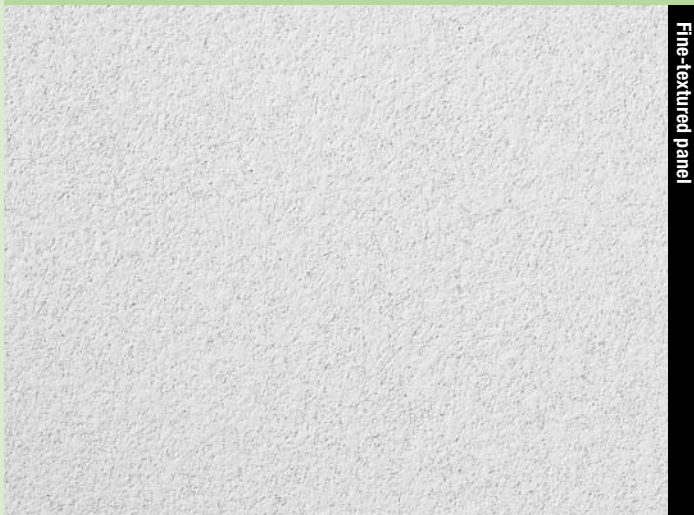

Call 888.874.2450 for samples



White

30

Year System Warranty  
 - No visible sag  
 - Mold/mildew protection

HALCYON  
 CLIMAPLUS  
 Panels

UL Classified

Edge	Panel Size <sup>2</sup>	Class	Item No.	NRC	CAC Min.	LR <sup>3</sup>	Color	Grid Options	Anti-Mold & Mildew	Recycled Content <sup>4</sup>	Panel Cost
SQ	2'x2'x3/4"	Class A	97221	.90	20	.88	White	A, B, C		40%	\$\$
	2'x4'x3/4"	Class A	97241	.90	20	.88	White	A, B		40%	\$\$
	2'x2'x1"	Class A	98221	.95	20	.88	White	A, B, C		41%	\$\$
	30"x30"x1"	Class A	98331	.95	20	.88	White	A, B, C		41%	\$\$\$
	2'x2'x1" Foil-Back	Class A	88221	.90	30	.88	White	A, B, C		41%	\$\$
	2'x4'x1"	Class A	98241	.95	20	.88	White	A, B		41%	\$\$
	2'x4'x1" Foil-Back	Class A	88223	.90	30	.88	White	A, B		41%	\$\$
	2'x4'x1-1/2"	Class A	99241	1.00	25	.88	White	A, B		42%	\$\$
	2'x4'x1-1/2" Foil-Back	Class A	88224	.95	30	.88	White	A, B		42%	\$\$
	2'x2'x1-1/2"	Class A	99221	1.00	25	.88	White	A, B, C		42%	\$\$
SL	2'x2'x1"	Class A	98223	.95	20	.88	White	D		41%	\$\$
	2'x2'x1" Foil-Back	Class A	88225	.90	30	.88	White	D		41%	\$\$
	2'x4'x1"	Class A	98243	.95	20	.88	White	D		41%	\$\$
	30"x30"x1"	Class A	98333	.95	20	.88	White	D		41%	\$\$\$
	2'x4'x1" Foil-Back	Class A	88226	.90	30	.88	White	D		41%	\$\$
	2'x2'x1-1/2"	Class A	99223	1.00	25	.88	White	D		42%	\$\$
FL	2'x2'x1"	Class A	98225	.95	20	.88	White	E, F, G		41%	\$\$
	2'x4'x1"	Class A	98245	.95	20	.88	White	E, F, G		41%	\$\$
	30"x30"x1"	Class A	98335	.95	20	.88	White	E, F, G		41%	\$\$\$
	2'x2'x1" Foil-Back	Class A	88227	.90	30	.88	White	E, F, G		41%	\$\$
	2'x2'x1-1/2"	Class A	99225	1.00	25	.88	White	E, F, G		42%	\$\$

A	B	C	D	E	F	G
DX®/DXL™	DXW™	CENTRICITEE™ DXT	DX/DXL	CENTRICITEE DXT	FINELINE® DXF	FINELINE® 1/8 DXFF

**Legend**

CLIMAPLUS Inherent Performance<sup>5</sup>

Fiberglass substrate is inherently resistant to the growth of mold, mildew and bacteria.

**Physical Data/  
Footnotes**

<p><b>Product literature</b> Data sheet: SC2365</p> <p><b>ASTM E1264 classification</b> Type XII, Form 2, Pattern G</p> <p><b>ASTM E84 surface burning characteristics</b> Class A Flame spread: 25 Smoke developed: 50</p>	<p><b>Weight</b> 0.38 lb./sq. ft. (3/4" panels) 0.47 lb./sq. ft. (1" panels) 0.68 lb./sq. ft. (1-1/2" panels)</p> <p><b>Thermal resistance</b> R-3.3 (3/4" panels) R-4.4 (1" panels) R-6.6 (1-1/2" panels)</p>	<p><b>Maximum backloading</b> See Warranty for details.</p> <p><b>Maintenance</b> Can be cleaned easily with a soft brush or vacuum.</p>	<p><b>Footnotes</b> 1. Dependent on location; see Sustainability selector. 2. Custom-size panels available. Please contact your USG sales representative for details. 3. LR values are shown as averages. 4. For details, see Sustainability selector.</p>	<p>5. For details, see <i>Ceiling Systems Warranties and Limitations</i> (SC2102) and <i>CLIMAPLUS Ceilings Certification of Performance</i> (SC2451).</p>
---	--	--	--	--