

ASPEN Panels/
DOWN DX/DXL Suspension System

LEED Credits
Recycled Content: 29%

MR			EQ			
Waste Reduction ¹	Recycled Content	Regional Materials ²	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

Features and Benefits


- Random, naturally sculptured appearance offers upscale look without upscale cost.
- Sizes and formulations meet most design criteria. Suitable for general applications.

Applications

- Schools
- General offices
- Retail stores

Substrate

- Water-felted mineral fiber

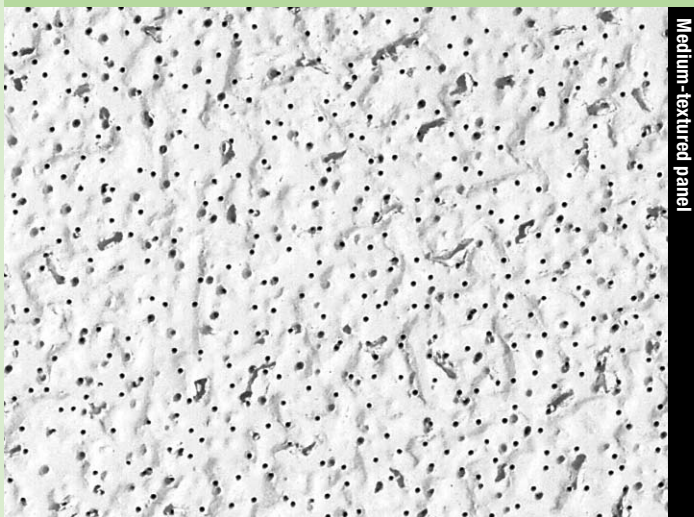














Medium-textured panel

Call 888 874.2450 for samples



White

UL Classified											
Edge	Panel Size	Class	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Recycled Content ⁴	Panel Cost
											
ASPEN Panels	SLT 	Class A	650	.55	35	.87	White	A	Low	29%	\$\$
		Class A	651	.55	35	.87	White	A	Low	29%	\$\$
ASPEN Illusion Two/24 Panels The look of 2'x2' panels	SLT ⁵ 	Class A	652	.50	40 	.84	White	A	Low	29%	\$\$
Illusion Two/24											
Face-Cut Patterns											
Legend											
 Low Emissions (VOC Class) Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.											
A DX®/DXL™											
Grid Profile Options											

**Physical Data/
Footnotes**

Product literature
Data sheet: SC1809

ASTM E1264 classification
ASPEN: Type III, Form 2, Pattern CDFI
ASPEN Illusion: Type III, Form 2, Pattern CDFIK

ASTM E84 surface burning characteristics
Class A
Flame spread: 25
Smoke developed: 50

Weight
1.43 lb./sq. ft. (Class A)
1.67 lb./sq. ft. (Illusion)

Thermal resistance
R-1.7 (3/4" panels)

Maximum backloading
See Warranty for details.

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Recommended suspensions
See the Grid and Edge selector.

Footnotes
1. Applies when USG acoustical ceilings recycling program is utilized.
2. Dependent on location; see Sustainability selector.
3. LR values are shown as averages.
4. For details, see Sustainability selector.
5. Panels have a 15/16" routing.