

7" POE, Wall-Mount Touch Screen Control4® Suite Systems



Easily navigate the Touch Screen to control AV, room temperature, curtains, lighting, timers, green settings and request guest services.


The Control4® 7" Wall-Mount Touch Screen is an intuitive way for guests and staff to manage room automation. Ideal for new construction and for existing properties, the 7" Touch Screen is easy to install and use, providing one-touch control of audio, video, temperature, lighting, drapes and services.

Thanks to an incredibly intuitive navigation, your guests will be able to easily control everything in their room from the touch screen. They can also use the touch screen to create personalized settings.

Control4® 7" Wall-Mount Touch Screens give your property the ability to deliver an unprecedented guestroom automation experience that focuses on comfort and convenience. At the same time, your property enjoys complete control of lighting, temperature and other in-room functions, allowing you to maximize energy efficiencies and reduce demands on staff.

- Full-color graphical interface uses intelligent touch technology
- Multiple power source options (Power over Ethernet or 120VAC)
- Attractive design complements most in-room decors
- FC, UL, CE and RoHs certified

7" POE, Wall-Mount Touch Screen Control4 Suite Systems

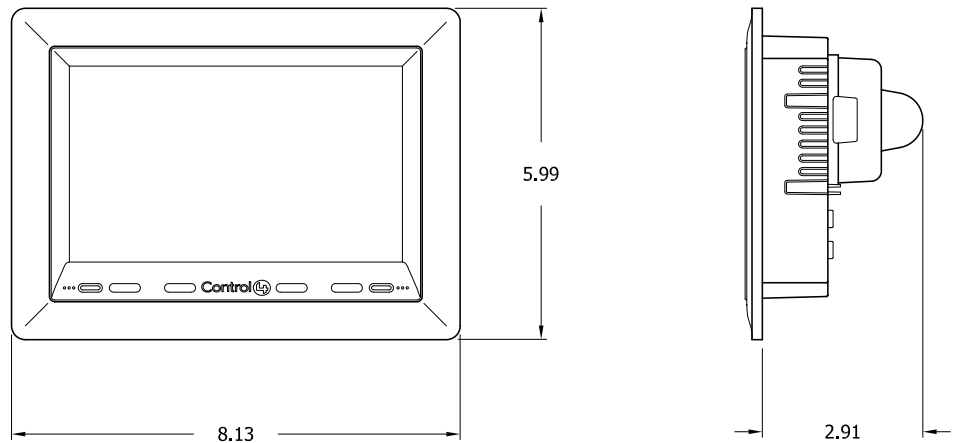

Technical Specifications

Display Specifications

- High contrast, 7" WVGA 800 x 480 pixel resolution, resistive touch screen, 18 bit color depth

Communications

- 10/100BaseT Ethernet

Hard Buttons

- 4 Custom programmable hard buttons

Connectors

- USB port - Front accessible with bezel removed

Reset Buttons

- Hard reset button - Front accessible with bezel removed

Power Requirements

- Power over Ethernet or 120VAC

Dimensions (approximately)

- W x H x D : 8.125" x 6" x 3.4" inches (with Bezel and AC adapter)
- Weight: 1.6 lbs

Wall Boxes

- C4-RWB7-M - Metal Retrofit Wall Box
- C4-RWB7-P - Plastic Retrofit Wall Box
- C4-NWB7-M - Metal New Construction Wall Box
- C4-NWB7-P - Plastic New Construction Wall Box

Wall Boxes

- Operational 0°C to 45°C
- Humidity 5% to 90% Non-Condensing
- Storage -20°C to 60°C

