



PARALINE Linear Metal Ceiling System with Field-Applied Custom Paint

### LEED Credits

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials <sup>1</sup>	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance <sup>2</sup>
●	●	●				●

### Features and Benefits

- Elegant linear metal ceiling system features 12' long metal pans attached to a specially engineered suspension system.
- Closed-reveal PARALINE II pans are appropriate for exterior ceiling applications under protected soffits.
- Snap-up design offers unlimited access with minimum plenum depth requirements.
- Wind load tested (120 mph) with proper bracing and exterior framing.
- Available with perforated pans for PARALINE II for NRC ratings as high as .95 when backed with fiberglass.

### Applications

- Exterior soffits
- High-bay areas
- Retail stores
- Transportation terminals



### Call 888.874.2450 for color samples

#### Painted Metals



Flat White



Silver Satin  
002



Metallic Copper  
1690



Metallic Gold  
1691



Metallic Oyster  
1652




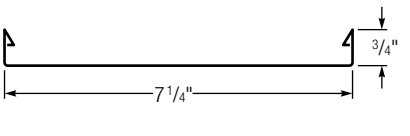
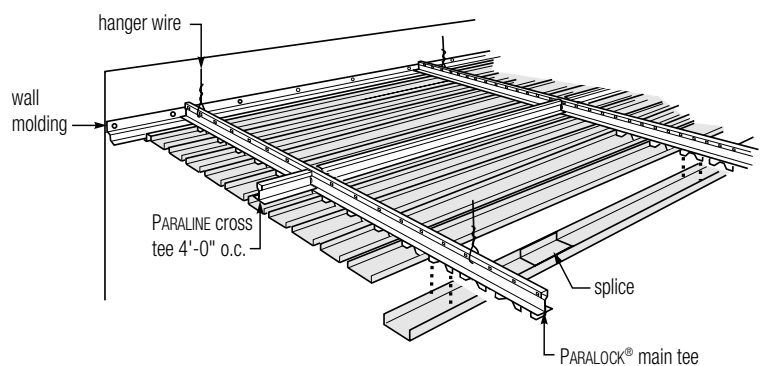
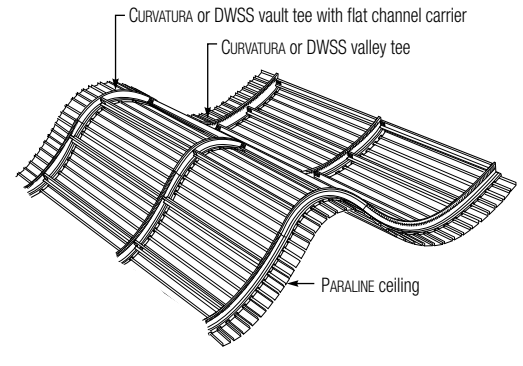
#### Anodized Metals



Brushed Aluminum  
PIA12



Polished Aluminum  
PM61

<b>Product Information</b>			
<b>Materials</b>		<b>Typical Sizes</b>	<b>Finishes</b>
PARALINE I, II, and III: Aluminum		3-1/4" x 12', 7-1/4" x 12'	Perforation available: PARALINE II only.
<b>PARALINE II Perforation Pattern</b>		Round—1/16" perforations .235 o.c., 5% open area (Perforation shown 50% actual size)	
<b>Details</b>	<b>PARALINE I</b>	<b>PARALINE II</b>	<b>PARALINE III</b>
			
	PARALINE I ceilings use 3-1/4" wide pans with roll-finished edges. Once assembled, the pans provide an open reveal for excellent acoustical control (sound is absorbed by acoustical material in the plenum).	PARALINE II ceilings maintain the 3-1/4" wide pan dimension, but are constructed with integral flanges that overlap to form a reveal closure that is appropriate for exterior soffit applications. Perforated available.	PARALINE III ceilings have bolder, 7-1/4" wide pans for larger-scale applications. Pans have a roll-finished edge to provide the same open reveal as PARALINE I with similar acoustical control.
<b>Perspective</b>	<b>USG Drywall Suspension System or CURVATURA Suspension For PARALINE Wave Ceilings</b>		
			

**For More Information**

**Product literature**

System brochure: IC463  
Data sheet: IC315

**Online tools**

usgdesignstudio.com

**Fire-rated designs**

UL fire-rated design number D-218 rating for 2-hour or 3-hour restrained or unrestrained assembly and 3-hour unrestrained beam rating.

**Light reflectance**

Flat White: LR-0.80 (less with perforations and other colors).

**Recycled content**

PARALINE: 70% recycled content.

**Footnote**

1. Dependent on location; contact your USG representative.
2. PARALINE II with perforation and fiberglass backing.