

Halcyon™ *ClimaPlus*™ Planks and Large Sizes



HALCYON Planks with *CLIMAPLUS* Performance/
DONN CENTRICITEE DXT Suspension System

LEED Credits

Recycled Content: 40% – 41%
CLIMAPLUS No-Sag Warranty

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials ¹	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
	●	●			●	●

Features and Benefits

- Range of planks and panels for large-module ceilings.
- Fine, monolithic texture.
- Light reflectance of .88 is part of an “indirect lighting” solution.
- Exceptional noise reduction.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a *DONN*® brand suspension system.
- Lightweight fiberglass basemat makes installation fast and easy.

Applications

- Open-plan offices
- Reception and lobby areas
- Corridors
- Convention halls and concourses
- Spaces with indirect or natural lighting

Substrate


- Fiberglass

Call 888 874.2450 for samples



White

Fine-textured panel

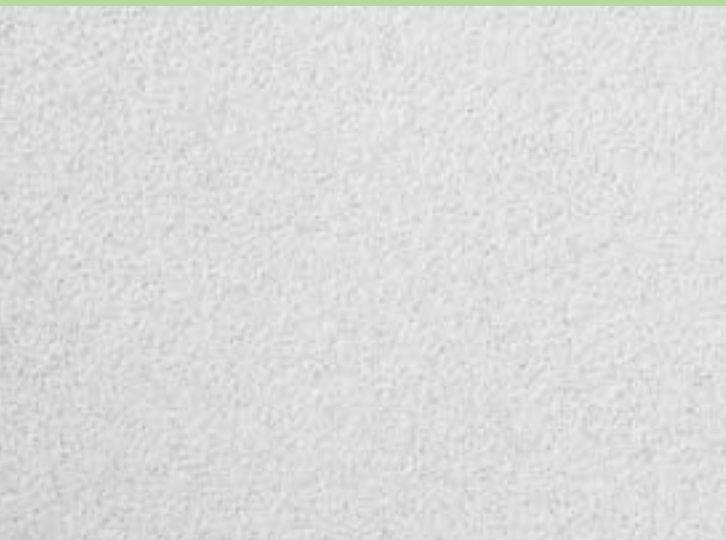

Halcyon™ *ClimaPlus*™ Planks and Large Sizes

Web Sites: usg.com
usgdesignstudio.com
sustainableceilings.com
seismicceilings.com

Technical Service 800 USG.4YOU
Samples/Literature 888 874.2450
Samples/Literature Fax 888 874.2348
Customer Service 800 950.3839

See usg.com for
the most up-to-date
product information.

30

Year System Warranty
- No visible sag
- Mold/mildew protection

HALCYON
CLIMAPLUS
Planks

HALCYON
CLIMAPLUS
Large Sizes

Edge	Panel Size ^{2,3}	Class	Item No.	UL Classified			Color	Grid Options	Anti-Mold & Mildew	Recycled Content ⁵	Panel Cost
				NRC	CAC Min.	LR ⁴					
SQ	2'x6'x3/4"	Class A	97262	.90	20	.88	White	A, B		40%	\$\$\$
	2'x8'x3/4"	Class A	97263	.90	20	.88	White	A, B		40%	\$\$\$
SL	2'x6'x1"	Class A	99268	.95	20	.88	White	D		41%	\$\$\$
	2'x8'x1"	Class A	99269	.95	20	.88	White	D		41%	\$\$\$
FL	2'x6'x1"	Class A	98348	.95	20	.88	White	E, F, G		41%	\$\$\$
	2'x8'x1"	Class A	98197	.95	20	.88	White	E, F, G		41%	\$\$\$
SQ	4'x4'x1"	Class A	98441	.95	20	.88	White	A, B		41%	\$\$\$
	4'x8'x1"	Class A	98481	.95	20	.88	White	A, B		41%	\$\$\$
SL	4'x4'x1"	Class A	98443	.95	20	.88	White	D		41%	\$\$\$
FL	4'x4'x1"	Class A	98445	.95	20	.88	White	E, F, G		41%	\$\$\$

Legend

CLIMAPLUS Inherent Performance⁶
Fiberglass substrate is inherently resistant to the growth of mold and mildew.

A DX®/DXL™	B DXW™	C CENTRICITEE™ DXT	D DX/DXL	E CENTRICITEE DXT	F FINELINE® DXF	G FINELINE® 1/8 DXFF

Grid Profile Options

**Physical Data/
Footnotes**

Product literature
Data sheet: SC2483
ASTM E1264 classification
Type XII, Form 2, Pattern G
ASTM E84 surface burning characteristics
Class A
Flame spread: 25
Smoke developed: 50
Weight
0.38 lb./sq. ft. (3/4" panels)
0.47 lb./sq. ft. (1" panels)

Thermal resistance
R-3.3 (3/4" panels)
R-4.4 (1" panels)
Maximum backloading
See Warranty for details.
Maintenance
Can be cleaned easily with a soft brush or vacuum.

Footnotes
1. Dependent on location; see Sustainability selector.
2. Custom-size panels available. Please contact your USG sales representative for details.
3. Stabilizer bars recommended for panels 5' and longer. See USG parts list IC532 for details.
4. LR values are shown as averages.
5. For details, see Sustainability selector.
6. For details, see *Ceiling Systems Warranties and Limitations (SC2102)* and *CLIMAPLUS Ceilings Certification of Performance (SC2451)*.



Manufactured by USG Interiors, Inc.
550 West Adams Street
Chicago, IL 60661

The following are trademarks of USG Interiors, Inc. or a related company: CLIMAPLUS, DONN, DX, DXF, DXL, DXT, DXW, HALCYON, USG.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

SC2483/rev. 5-08
© 2008, USG Interiors, Inc.
Printed in U.S.A.