

FISSURED Panels/  
DOWN DX/DXL Suspension System

**LEED Credits**  
Recycled Content: 25% – 50%

MR			EQ			
Waste Reduction <sup>1</sup>	Recycled Content	Regional Materials <sup>2</sup>	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

**Features and Benefits**

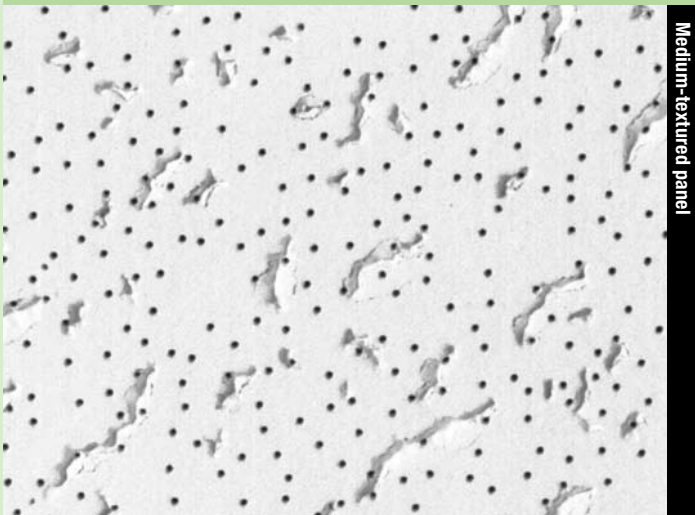
- Economical, all-purpose ceiling pattern available in various panel sizes.
- Optional FIRECODE™ formulation designed to meet life safety codes.

**Applications**

- Administrative offices
- Corridors
- Mass merchandisers
- Convenience stores

**Substrate**

- Water-felted mineral fiber



























Medium-textured panel

Call 888 874.2450 for samples



White

UL Classified																							
Edge	Panel Size	Class <sup>3</sup>	Item No.	NRC	CAC Min.	LR <sup>4</sup>	Color	Grid Options	VOC Emissions	Recycled Content <sup>5</sup>	Panel Cost												
																							
FISSURED Panels	SQ 	Class A	<b>560</b>	.55	33	.81	White	A, B, C	Low	25%	\$												
			<b>585</b>	.55	35	.81	White	A	Low	48–50%	\$												
		Class A	<b>562</b>	.55	35	.81	White	A, B	Low	25%	\$												
			<b>586</b>	.55	35	.81	White	A	Low	48–50%	\$												
	SLT 	Class A	<b>506</b>	.55	33	.81	White	D	Low	25%	\$												
		Class A	<b>507</b>	.55	35	.81	White	D	Low	25%	\$												
<b>Legend</b>																							
 <b>Low Emissions (VOC Class)</b> Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.																							
<table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> <th>D</th> </tr> <tr> <th>DX<sup>®</sup>/DXL<sup>™</sup></th> <th>DXW<sup>™</sup></th> <th>CENTRICITEE<sup>™</sup> DXT</th> <th>DX/DXL</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>												A	B	C	D	DX <sup>®</sup> /DXL <sup>™</sup>	DXW <sup>™</sup>	CENTRICITEE <sup>™</sup> DXT	DX/DXL				
A	B	C	D																				
DX <sup>®</sup> /DXL <sup>™</sup>	DXW <sup>™</sup>	CENTRICITEE <sup>™</sup> DXT	DX/DXL																				
																							
<b>Grid Profile Options</b>																							

**Physical Data/  
Footnotes**

**Product literature**  
Data sheet: SC1815

**ASTM E1264 classification**  
Type III, Form 2, Pattern CD

**ASTM E84 surface burning characteristics**  
Class A  
Flame spread: 25  
Smoke developed: 50

**Weight**  
.61–1.2 lb./sq. ft. (Class A)  
1.14–1.22 lb./sq. ft. (FIRECODE)

**Thermal resistance**  
R-1.4 (Class A)  
R-1.6 (FIRECODE)

**Maximum backloading**  
See Warranty for details.

**Maintenance**  
Can be cleaned easily with a soft brush or vacuum.

**Footnotes**

1. Applies when USG acoustical ceilings recycling program is utilized.
2. Dependent on location; see Sustainability selector.
3. Fire-rated items: see UL design details.
4. LR values are shown as averages.
5. For details, see Sustainability selector.