




Rock Face[®] *ClimaPlus*[™]



Medium textured panel

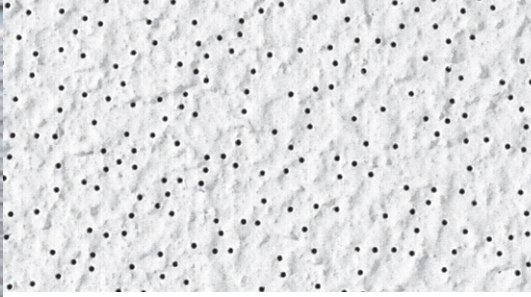

Features and Benefits

- Specially compounded textured surface with hard core.
- Perfect for increased abuse resistance and sag resistance.
- *CLIMAPLUS*[™] 15-year System Warranty to withstand conditions up to 104 °F (40 °C)/90% relative humidity without visible sag when used with a USG *DONN*[®] Brand Suspension System.
- *FIRECODE*[™] formulation designed to meet life safety codes.

Applications

- Athletic areas and exercise rooms
- Schools
- Corridors
- Dormitory rooms

Rock Face[®] Panels with *CLIMAPLUS*[™] Performance/*DONN*[®] Brand DX[®]/DXL[™] Suspension System












Rock Face® ClimaPlus™

Acoustical Ceilings

Technical Service 800.USG.4YOU
Web Site www.usg.com
Samples/Literature 888.874.2450
Samples/Literature Fax 888.874.2348
Customer Service 800.950.3839
Literature Number SC1840



UL Classified

Edge	Panel Size	Class	Item No.	NRC	CAC Min.	LR ¹	Color	Grid Options	Recycled Content ²	Panel Cost	
ROCK FACE® CLIMAPLUS™ Panels  	2' x2' x5/8"		56335	.50	35	.84	White	A, B, C	45%	\$\$	
	2' x4' x5/8"		56380	.50	35	.84	White	A, B, C	45%	\$\$	
	2' x2' x3/4"		55483	.50	35	.84	White	D, E, F	45%	\$\$	
		A DONN® DX®/ DXL™	B DONN DXLA™	C ZXLA™	D DONN DX/DXL	E DONN DXLA	F ZXLA				
Grid Profile Options											

ASTM E1264 classification

Type III, Form 2, Pattern CE
ASTM E84 surface burning characteristics

Class A
Flame spread: 25
Smoke developed: 10

Weight

1.28 lb./ft.² (5/8" panels)
1.48 lb./ft.² (3/4" panels)

Thermal resistance

R-1.6 (5/8" panels)
R-1.9 (3/4" panels)

Maximum backloading

See Warranty for details.

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Durability tests

ASTM C367: Tested to 220 lbf. for 1/4" depression by a 2" steel ball.

ASTM D1037: Tested to 45 lbf. for a 1/4" depression by a Janka ball.

ASTM D5420: Tested to 3.5 in./lbf. for impaction.

Footnotes

1. LR values are shown as averages.
2. For details, see the Recycled Content selector.

SAFETY FIRST!

Follow good safety and industrial hygiene practices during handling and installation of all products and systems. Take necessary precautions and wear the appropriate personal protective equipment as needed. Read material safety data sheets and related literature on products before specification and/or installation.



Manufactured by
USG Interiors, Inc.
125 South Franklin Street
Chicago, IL 60606

The following are trademarks of USG Interiors, Inc. or a related company:
CLIMAPLUS, DONN, DX, DXL, DXLA, FIRECODE, ROCK FACE, USG, ZXLA.

SC1840/rev. 2-05
© 2005, USG Interiors, Inc.
Printed in U.S.A.