



CELEBRATION Silver Satin Metal Ceiling Panels/
DONN FINELINE DXF Suspension System

LEED Credits

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials ¹	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance ²
●	●	●				●

Features and Benefits

- Aluminum panels provide a monolithic appearance.
- Easy installation into standard DOWN® brand FINELINE® DXF suspension system.
- Snap-up installation with downward access is excellent for shallow plenum areas.
- Wall-mount solution available; see IC508.
- Systems up to 30" wide and 78" long windload tested to 120 MPH with proper bracing and exterior framing.

Applications

- Entertainment
- Gaming
- Exterior soffits
- Hospitality
- Transportation terminals




Call 888.874.2450 for color samples

See IC415 for color and perforation availability.

Painted Metals




Premium Metals



Wood Tones



Anodized Metals



Product Information				
Materials	Finishes	Typical Sizes ³	Plenum Depth	Weight
Aluminum panels: Painted or anodized.	2' x 2' panels available with perforation and/or embossing.	2' x 2', 4' x 4', 30" x 30"	Since panels are installed from below, the clearance for installation and removal of panels is minimal. Additional plenum clearance of up to 9" is required for air boot and lighting installations, depending on the unit selected.	Approximately .53 lbs. per sq. ft., not including lights and air diffusers.


Grid Layout The modular nature of CELEBRATION ceilings must be considered when an installation is designed. Main tees and cross tees are exactly on module lines. Panels may be field-cut at walls and columns or terminated at a grid module for island installations.

Acoustics	Description	Optional Acoustical Material	Sound Rating – NRC	
			Perforation A062	Perforation A116
	Perforated panel	ACOUSTIBOND backer	.65	.70
	Perforated panel	1-1/2", 6 lb. density fiberglass	.90	.95
	Perforated panel	2", .75 lb. fiberglass in poly bag	.85	.90

Air Handling Air diffusers may be located around the perimeter of the ceiling or laid into the grid in place of CELEBRATION panels. The CELEBRATION diffuser is an extruded aluminum frame with matching faceplate and color-coordinated vanes, in 1-, 2-, 3-, and 4-slot configurations, with four-directional throw.


Code Approval CELEBRATION panels provide a continuous interlock with the suspension system. Supporting grid is capable of sustaining loads greater than those imposed by the CELEBRATION system when installed in accordance with manufacturer's instructions.

Perspective

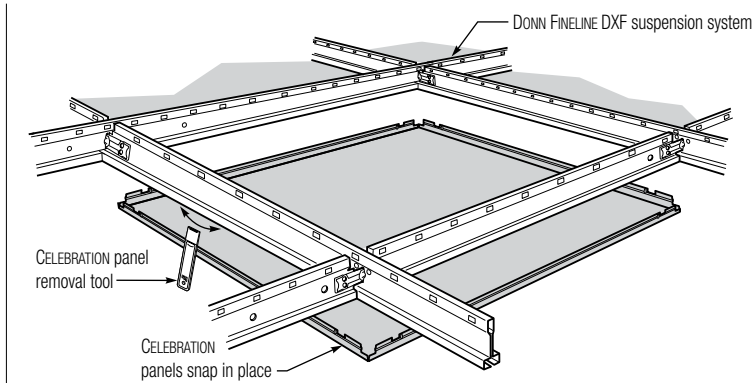


CELEBRATION Air Diffuser
 Available in 1-, 2-, 3- and 4-slot configurations, with four-directional throw.

View from above

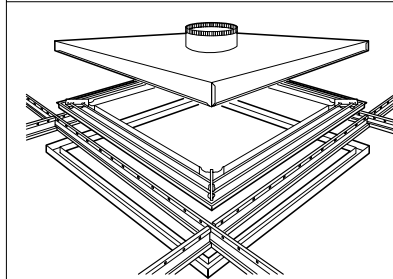

View from below

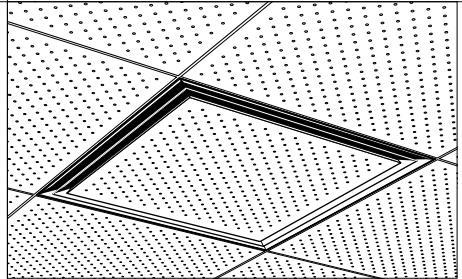

For More Information

Product literature
 System brochure: IC415
 Data sheet: IC308

Online tools
usgdesignstudio.com

Acoustics
 These values are for standard A062 perforation pattern.

Recycled content
 CELEBRATION aluminum panels:
 70% recycled content.

Footnotes
 1. Dependent on location; contact your USG representative.
 2. Requires perforation and ACOUSTIBOND backer.
 3. Additional sizes available on request.
 4. Interior use, painted finishes only.

