

Sheetrock® Lay-In Ceiling Panel *ClimaPlus™*



10

Year Availability
3270



SHEETROCK Lay-In Ceiling Panel, Vinyl, with *CLIMAPLUS* Performance/
DONN ZXLA Suspension System

LEED Credits

Recycled Content: 23%
CLIMAPLUS No-Sag Warranty

MR			EQ			
Waste Reduction	Recycled Content	Regional Materials ¹	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
	●	●	●		●	●

Features and Benefits

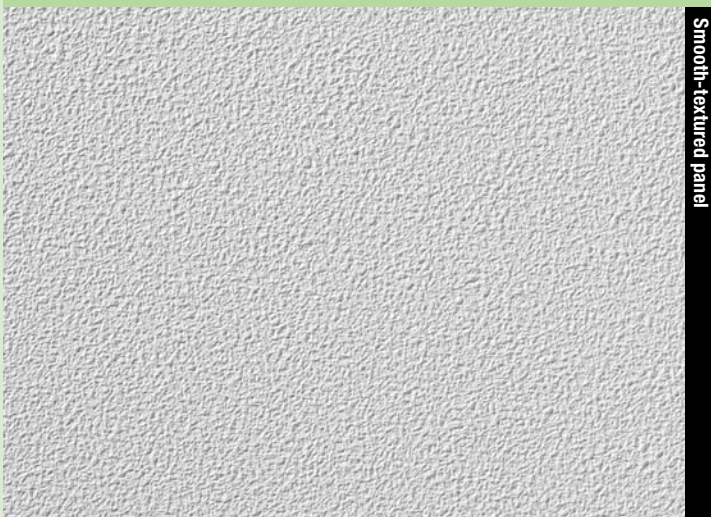
- Panels meet U. S. Dept. of Agriculture Food Safety Inspection Service requirements for food processing areas.
- SHEETROCK® brand CLEAN ROOM™ lay-in ceiling panels can be used in cleanroom environments up to Class 100.
- *CLIMAPLUS*™ 30-year lifetime no-sag system warranty up to 104 °F (40 °C)/95% relative humidity when used with a DONN® brand suspension system.

Applications

- Exterior protected soffits
- Kitchens and food preparation areas
- Restrooms and utility areas
- Locker rooms
- Marine environments

Substrate

- Gypsum panel



Smooth-textured panel




















Call 888.874.2450 for color samples



White

30

Year System Warranty
– No visible sag

	Edge	Panel Size	Class ²	Item No.	UL Classified		Color	Abuse-Resistant	Grid Options	Recycled Content ⁵	Panel Cost	
					NRC ³	CAC Min.						
												
SHEETROCK Lay-In Ceiling Panel CLIMAPLUS, Vinyl	SQ 	2'x2'x1/2"		3260	—	35	.77	White		A, B, C, D,	23%	\$
		2'x4'x1/2"		3270	—	40	.77	White		A, B, C, D,	23%	\$
SHEETROCK Lay-In Ceiling Panel CLIMAPLUS, CLEAN ROOM⁶	SQ 	2'x4'x1/2"		3200	—	40	.77	White		A, B, C, D,	23%	\$\$
	A DONN [®] DX [®] /DXL [™]	B DONN [®] DXLA [™]	C ZXL [™]	D DONN CE ^{™7}								
Grid Profile Options												

**Physical Data/
Footnotes****Product literature**

Data sheet: SC1820

ASTM E1264 classification
Type XX, Pattern G**ASTM E84 surface burning characteristics**
Class AVinyl
Flame spread: 25
Smoke developed: 50
CLEAN ROOM
Flame spread: 25
Smoke developed: 50**Weight**

1/2" = 2.00 lb./sq. ft.

Thermal resistance
1/2" = up to R-0.45**Maximum backloading**
See Warranty for details.**Maintenance**

Can be cleaned easily with a damp sponge. Use mild detergent and water – do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

U.S. Coast Guard acceptance

Approved for use on merchant ships.

Footnotes

1. Dependent on location; see Sustainability selector.
2. Fire-rated items: see UL design details.
3. NRC rating is .10. USG does not consider a ceiling panel to be acoustically rated if NRC is less than .50

4. LR values are shown as averages.

5. For details, see Sustainability selector.

6. Field-cut edges of CLEAN ROOM panels must be sealed with white latex paint.

7. Clean-room-rated applications require a suspension system with gasketed tee flanges such as DONN CE.