

Halcyon™ *ClimaPlus*™ Planks and Large Sizes



HALCYON Planks with *CLIMAPLUS* Performance/
DONN CENTRICITEE DXT Suspension System

LEED Credits

Recycled Content: 40% – 41%
CLIMAPLUS No-Sag Warranty

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials ¹	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
	●	●			●	●

Features and Benefits


- Range of planks and panels for large-module ceilings.
- Fine, monolithic texture.
- Light reflectance of .88 is part of an “indirect lighting” solution.
- Exceptional noise reduction.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a *DONN*® brand suspension system.
- Lightweight fiberglass basemat makes installation fast and easy.

Applications

- Open-plan offices
- Reception and lobby areas
- Corridors
- Convention halls and concourses
- Spaces with indirect or natural lighting

Substrate

- Fiberglass

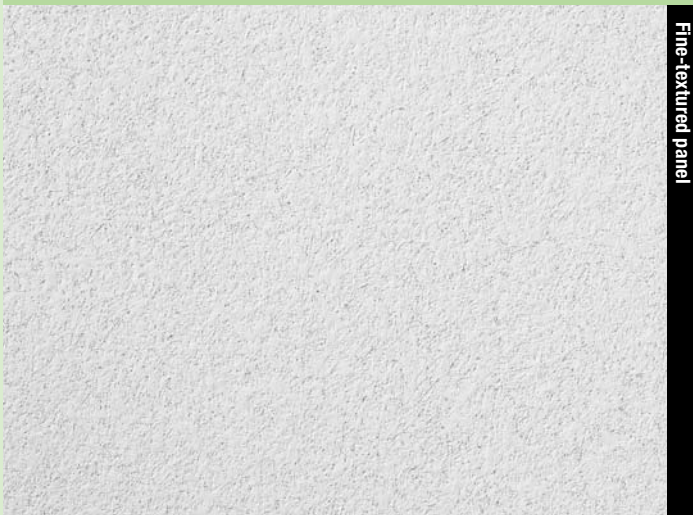

Call 888.874.2450 for samples



White

30
 Year System Warranty
 - No visible sag
 - Mold/mildew protection


UL Classified													
Edge	Panel Size ^{2,3}	Class	Item No.	NRC	CAC Min.	LR ⁴	Color	Grid Options	Anti-Mold & Mildew	Recycled Content ⁵	Panel Cost		
HALCYON CLIMAPLUS Planks	SQ 	2'x6'x3/4"	Class A	97262	.90		20	.88	White	A, B		40%	\$\$\$
		2'x8'x3/4"	Class A	97263	.90		20	.88	White	A, B		40%	\$\$\$
	SL 	2'x6'x1"	Class A	99268	.95		20	.88	White	D		41%	\$\$\$
		2'x8'x1"	Class A	99269	.95		20	.88	White	D		41%	\$\$\$
	FL 	2'x6'x1"	Class A	98348	.95		20	.88	White	E, F, G		41%	\$\$\$
		2'x8'x1"	Class A	98197	.95		20	.88	White	E, F, G		41%	\$\$\$
HALCYON CLIMAPLUS Large Sizes	SQ 	4'x4'x1"	Class A	98441	.95		20	.88	White	A, B		41%	\$\$\$
		4'x8'x1"	Class A	98481	.95		20	.88	White	A, B		41%	\$\$\$
	SL 	4'x4'x1"	Class A	98443	.95		20	.88	White	D		41%	\$\$\$
	FL 	4'x4'x1"	Class A	98445	.95		20	.88	White	E, F, G		41%	\$\$\$

Legend

CLIMAPLUS Inherent Performance⁶
 Fiberglass substrate is inherently resistant to the growth of mold, mildew and bacteria.

A DX [®] /DXL™	B DXW™	C CENTRICITEE™ DXT	D DX/DXL	E CENTRICITEE DXT	F FINELINE [®] DXF	G FINELINE [®] 1/8 DXFF
-----------------------------------	------------------	---------------------------------	--------------------	--------------------------------	--	---

Grid Profile Options



Physical Data/ Footnotes

Product literature
 Data sheet: SC2483
ASTM E1264 classification
 Type XII, Form 2, Pattern G
ASTM E84 surface burning characteristics
 Class A
 Flame spread: 25
 Smoke developed: 50
Weight
 0.38 lb./sq. ft. (3/4" panels)
 0.47 lb./sq. ft. (1" panels)

Thermal resistance
 R-3.3 (3/4" panels)
 R-4.4 (1" panels)
Maximum backloading
 See Warranty for details.
Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Footnotes
 1. Dependent on location; see Sustainability selector.
 2. Custom-size panels available. Please contact your USG sales representative for details.
 3. Stabilizer bars recommended for panels 5' and longer. See USG parts list IC532 for details.
 4. LR values are shown as averages.
 5. For details, see Sustainability selector.
 6. For details, see *Ceiling Systems Warranties and Limitations* (SC2102) and *CLIMAPLUS Ceilings Certification of Performance* (SC2451).