

Gold Bond[®] BRAND **1" Fire-Shield[®] Shaftliner XP[®]**



**Gold
Bond[®]**
BRAND
Gypsum Board

National 
Gypsum[®]

Gold Bond® BRAND 1" Fire-Shield® Shaftliner XP®

Description

Gold Bond® BRAND 1" Fire-Shield® Shaftliner XP® gypsum panels consist of a fire resistant type X gypsum core encased in a heavy moisture/mold/mildew resistant, 100% recycled purple paper on the face and back sides. The face paper is folded around the long edges to reinforce and protect the core, and the ends are square-cut and finished smooth. Long edges of panels have a double-beveled edge for ease of installation.

1" Shaftliner XP panels are designed to be used in construction of light-weight fire barriers for cavity shafts and area separation walls in multi-family housing. The panels are key components in the C-H, C-T, I-Stud Cavity Shaftwall System and the H-Stud Area Separation Wall System.

Features/Benefits

- Resists growth of mold and mildew per ASTM D 3273
- Lightweight, cost-efficient material.
- Shaftliner is easily cut for quick installation.
- The gypsum core will not support combustion or transmit temperatures greatly in excess of 212°F (100°C) until completely calcined, a slow process.

- Expansion and contraction under normal atmospheric changes is negligible.
- UL Classified for fire resistance, surface burning characteristics and non-combustibility.
- Shaftliner XP may be substituted for National Gypsum's Gold Bond® BRAND Fire-Shield Shaftliner in Cavity Shaftwall, Area Separation Wall Systems and solid laminated partitions.

Fire Resistance Ratings


Fire resistance ratings represent the results of tests on assemblies made up of materials authorized by National Gypsum in specific configurations. When selecting construction designs to meet certain fire resistance requirements, caution must be used to ensure that each component of the assembly is the one specified in the test. Further, precaution should be taken that assembly procedures are in accordance with those of the tested assembly. (For copies of specific tests, call 1-800-NATIONAL.)

Installation

Installation of 1" Shaftliner XP gypsum panels should be consistent with methods described in specific application details for I-Stud Cavity Shaftwall Systems, H-Stud Area Separation Wall Systems or other fire-rated designs shown in National Gypsum Company's *Gypsum Construction Guide*.

Technical Data

PHYSICAL PROPERTIES	
Thickness, nominal	1" (25.4 mm)
Width, nominal	24" (610 mm)
Length, standard	8' (2440 mm) to 12' (4270 mm)
Weight, lbs./sf, nominal	3.75
Edges	Double-beveled
Surface Burning Characteristics (per ASTM E 84)	Flame spread: 15 Smoke developed: 0
Packaging	Single pieces
Flexural Strength	– Parallel 77 lbf., per ASTM C 473 – Perpendicular 228 lbf., per ASTM C 473 – R Value 0.65, per ASTM C 518

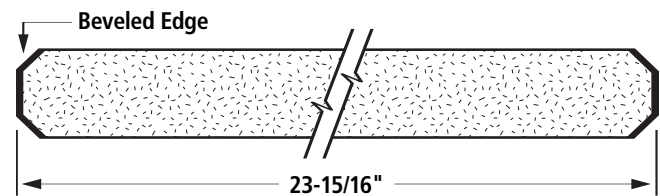

APPLICABLE STANDARDS AND REFERENCES
ASTM C 1396
Federal specification SS-L-30D Type IV Grade X

Mold and Mildew Resistance*

Gold Bond® BRAND 1" Fire-Shield® Shaftliner XP® was designed to provide extra protection against mold and mildew compared to standard wallboard products. When tested by an independent laboratory per ASTM D 3273 ("Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber"), Shaftliner XP achieved a score of 10, the best possible score for this test.

*The use of Shaftliner XP in actual installations may not produce the same results as were achieved in controlled laboratory conditions. No material can be considered "mold proof," nor is it certain that any material will resist mold or mildew indefinitely. When used in conjunction with good design, handling and construction practices, Shaftliner XP can provide increased mold resistance versus standard shaftliner products. As with any building material, avoiding water exposure during handling, storage and installation, and after installation is complete, is the best way to avoid the formation of mold or mildew.

Corporate Headquarters

National Gypsum Company
2001 Rexford Road
Charlotte, NC 28211
Phone: (704) 365-7300
Web: nationalgypsum.com
nationalgypsum.com/espanol

Technical Information

Phone: (800) NATIONAL
(800) 628-4662
Fax: (800) FAX-NGC1
(800) 329-6421

National 
Gypsum®

Excellence Across The Board®