

# distinct designs

## rubber flooring

Free your mind. Free your designs.  
And free yourself from the worries of  
that special color selection sending  
you over budget.

Distinct Designs color program is an answer for your unique sense of style, allowing you to apply colors from FlexTones®, SpexTones®, and Evolving Styles™ palettes to most any rubber tile. No minimum orders. Just maximum design flexibility and maximum impact.

Naturally resistant to mold and mildew, FLEXCO® rubber floors are designed for durability, versatility and slip resistance, plus they're very quiet and comfortable under foot. Choose from textured, smooth, and environmentally friendly tile, in colors and patterns to match any design or application, from showrooms and residences to auto shops and bakeries.






# flextones®

The raised and textured patterns allow dirt and water to drain off of the walking surface, increasing traction and improving slip resistance. And our low profile versions are ideal for areas with small-wheeled vehicular traffic, such as retail stores, healthcare facilities, airport terminals and more.

## features and benefits

- > Natural resistance to bacteria and fungi when tested in accordance with ASTM G 21.
- > PVC free rubber tiles are 1/8" gauge for durability and long wear.
- > FlexOne pricing applies to all colors in the FlexTones® color matching system.
- > Homogeneous color extends through the entire tile thickness.
- > Available with color-matched stair treads, wall base and accessories.
- > Flooring increases comfort by reducing leg fatigue and noise.
- > Radial® rubber tile features raised 1" diameter disks in two profiles: a 0.035" high profile for areas needing extra traction, such as elevators and ramps, and a 0.020" low profile. May contribute to LEED® CI and NC credits MR 5 and MR 6.
- > Radial® II rubber tile has 1-1/4" diameter disks with a beveled 0.020" low profile.
- > Radial® III rubber tile has a unique 0.020" beveled low profile with raised 1-1/2" diameter disks that are offset with stylized diamond shapes.
- > Weave rubber tile features a beveled 0.025" profile that creates a wonderful basket-weave design.
- > Square² rubber tile has a raised 1-1/4" texture with a beveled 0.025" profile that makes it a popular choice.
- > Hammered rubber tile features a flat surface with an orange-peel finish to provide safe footing in high traffic areas.
- > May be special ordered as IMO/Coast Guard certified.



the end user

### flextones®

"We have installed thousands of square feet of FLEXCO® on numerous marine vessels, living quarters and commercial buildings for over 20 years. We trust the performance and quality of FLEXCO® products to meet and satisfy our customers' needs."



custom

### waterjet cutting service

From school logos to corporate brands to unique designs and patterns, rubber tile is the perfect canvas for even the most intricate designs. Call for price quote.




# specifications

FlexTones®	Radial® (RLT/RBT)	Radial® II (RGT)
Gauge	1/8"	1/8"
Size	18" x 18"	18" x 18"
Pieces /Ctn	20	20
Weight /Ctn (lb)	44	46
Sq Ft /Ctn	45	45

FlexTones®	Radial® III (RCT)	Weave (WV)
Gauge	1/8"	1/8"
Size	18" x 18"	18" x 18"
Pieces /Ctn	20	20
Weight /Ctn (lb)	46	45
Sq Ft /Ctn	45	45

FlexTones®	Square² (SQ)	Hammered (SE)
Gauge	1/8"	1/8"
Size	18" x 18"	18" x 18"
Pieces /Ctn	20	20
Weight /Ctn (lb)	45	46
Sq Ft /Ctn	45	45

Must be installed using FLEXCO® 16/86 Multiperformance Tile & Tread Adhesive or 77 Solvent-Free Epoxy Adhesive.

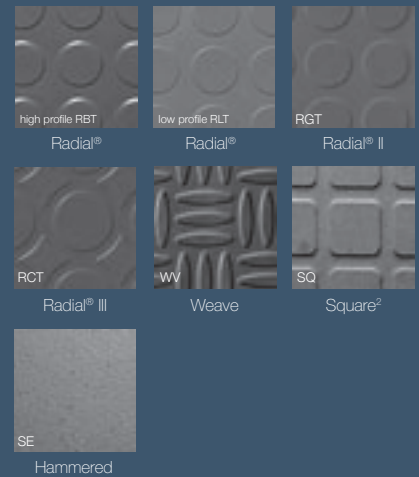

# evolving styles®

Evolving Styles® offer so much selection. Choose from two gauges, three tile sizes and sheet rubber flooring. You also have the option of using FLEXCO® Rubber Welding Beads to create a seamless installation for clean rooms and areas that have strict requirements for added hygiene. May contribute to LEED MR 5 and MR 6.

## features and benefits

- > PVC free rubber tiles are available in two gauges – 1/8" and .100".
- > Exceeds ADA recommendations for slip resistance on flat surfaces.
- > Homogeneous color extends through the entire tile thickness.
- > Provides a quiet and extremely comfortable walking surface.
- > Resilient products resist scuffs, gouges, cigarette burns and most chemicals.
- > Low maintenance and no waxing help reduce life cycle costs.
- > May be seamlessly installed with FLEXCO®'s Rubber Welding Beads.
- > Natural resistance to bacteria and fungi when tested in accordance with ASTM G 21.
- > 16/86 Multipurpose Tile & Tread Adhesive contains an antimicrobial agent for added protection against mold and bacteria.
- > May be special ordered as IMO/Coast Guard certified tiles only.

## creative elements



FLEXCO® Evolving Styles® are offered in two creative color lines, Creative Elements and our resilient Wood Elements™. Game line kits are available upon request in coordinating colors.

## wood elements™



the end user

## evolving styles®

creative elements

Architect: Fisher/Heck Architects

General Contractor: Barcom

Subcontractor: Allegiance Flooring,  
San Antonio, Texas

Project: UT Health Science Center,  
Dolph Briscoe Library, Austin, Texas

"Because the space was being remodeled into a state-of-the-art medical college classroom, it was important that the floor had to have certain qualities: be antimicrobial, comfortable to walk on, and offer good design flexibility. This is why the FLEXCO® rubber flooring was chosen. I was quite pleased to experience the comfort of walking on this material, as well as seeing the two-color, curved patterns throughout the project area."



# specifications

Evolving Styles®	Radial® (RLT/RBT)	Radial® II (RGT)
Gauge	1/8"	1/8"
Size	18" x 18"	18" x 18"
Pieces /Ctn	20	20
Weight /Ctn (lb)	44	46
Sq Ft /Ctn	45	45

Evolving Styles®	Radial® III (RCT)	Weave (WV)
Gauge	1/8"	1/8"
Size	18" x 18"	18" x 18"
Pieces /Ctn	20	20
Weight /Ctn (lb)	46	45
Sq Ft /Ctn	45	45

Evolving Styles®	Square <sup>2</sup> (SQ)	Hammered (SE)
Gauge	1/8"	1/8"
Size	18" x 18"	18" x 18"
Pieces /Ctn	20	20
Weight /Ctn (lb)	45	46
Sq Ft /Ctn	45	45


Evolving Styles®	1/8" Smooth †	.100" Smooth †
Size Tile (CE &WE)	12" x 12"	12" x 12"
	18" x 18"	18" x 18"
	36" x 36"	36" x 36"
Sheet* (CE & WE)	36" x 25'	36" x 25'
	48" x 25'	48" x 25'
Weight/Ctn (lb)		
12" x 12"	52	56
36" x 36"	62	68
Sheet Weight (lb)	10.8/sq yd	8.5/sq yd
Sq Ft/Ctn		
12" x 12"	45	60
18" x 18"	45	56.25
36" x 36"	54	72

\* Special orders for lengths greater than 25'.

† Sheet rubber manufactured untrimmed must be double-cut on the job site.

Note: Add HW to color number for pre-grooved Heat Weld tiles available in 36" x 36" x 1/8" gauge.

Must be installed using FLEXCO® 16/86 Multipurpose Tile & Tread Adhesive or 77 Solvent-Free Epoxy Adhesive.

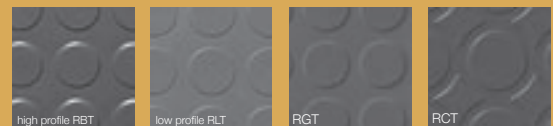

Radial®      Radial®      Radial® II      Radial® III



Weave      Square<sup>2</sup>      Hammered      Smooth

creative elements colors

Page 8

wood elements™ colors

Page 8

# spextones<sup>®</sup>

As the name implies, FLEXCO<sup>®</sup>'s SpexTones<sup>®</sup> product line is highlighted by speckled coloration that is particularly effective in concealing dirt and subsurface irregularities. It's everything you need to specify your next project with more confidence and in less time.

Made with FLEXCO<sup>®</sup>'s extra-resilient, slip resistant rubber compounds, SpexTones<sup>®</sup> tiles are PVC free and created using post-industrial waste. As a result, these nature friendly products can contribute to the LEED<sup>®</sup> Green Building Certification System. May contribute to LEED<sup>®</sup> CI and NC credits MR 4, MR 5 and MR 6.

## features and benefits

- > Natural resistance to bacteria and fungi when tested in accordance with ASTM G 21.
- > PVC free rubber tiles are 1/8" gauge for durability and long wear.
- > Colors coordinate with stair treads, wall base, accessories and other tile products in our FlexTones<sup>®</sup> color matching system.
- > May be special ordered as IMO/Coast Guard certified.
- > 16/86 Multiperformance Tile & Tread Adhesive contains antimicrobials for added protection against mold and bacteria.
- > Exceeds ADA recommendations for slip resistance on flat surfaces.



the end user

### spextones<sup>®</sup>

rubber tile

Architect: HSR Associates, Lacrosse, Wisconsin

General Contractor: Weber Companies

Subcontractor: Tristate Carpet, West Salem,  
Wisconsin

Project: Kasson Mantorville Middle School,  
Kasson, Minnesota

# specifications


SpexTones®	Radial® (SRLT/SBT)	Radial® II (SRGT)
Gauge	1/8"	1/8"
Size	18" x 18"	18" x 18"
Pieces /Ctn	20	20
Weight /Ctn (lb)	44	46
Sq Ft /Ctn	45	45

SpexTones®	Radial® III (SRCT)	Weave (SWW)
Gauge	1/8"	1/8"
Size	18" x 18"	18" x 18"
Pieces /Ctn	20	20
Weight /Ctn (lb)	46	45
Sq Ft /Ctn	45	45

SpexTones®	Square <sup>2</sup> (SSQ)	Hammered (SSE)
Gauge	1/8"	1/8"
Size	18" x 18"	18" x 18"
Pieces /Ctn	20	20
Weight /Ctn (lb)	45	46
Sq Ft /Ctn	45	45

SpexTones®	Smooth (SSM)		
Gauge	1/8"		
Size	12" x 12"	18" x 18"	36" x 36"
Pieces /Ctn	45	20	6
Weight /Ctn (lb)	45	45	45
Sq Ft /Ctn	45	45	54

Must be installed using FLEXCO® 16/86 Multiperformance Tile & Tread Adhesive or 77 Solvent-Free Epoxy Adhesive. Not available in sheet or .100" gauge smooth rubber tile.

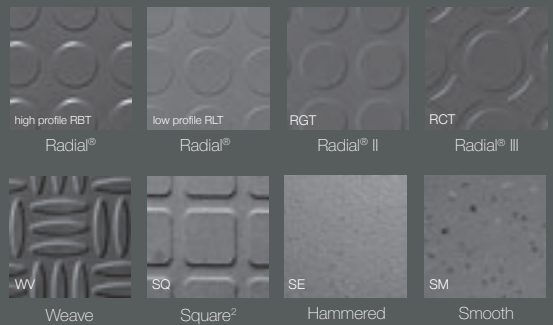




# tuflex® force™ recycled rubber tile

Make style and endurance an everyday practice. With its patented vulcanization process using predominantly recycled rubber, Tuflex® Force™ Resilient Rubber Flooring tiles have been keeping sports and commercial facilities in peak condition since 1957.

## features and benefits

- > Contains 85% post-consumer recycled content and may contribute to the LEED® Green Building Certification System.
- > 27" x 27" Tuflex® Force™ Resilient Rubber Tiles are manufactured at 3/8" gauge (square or interlocking edges) using a patented process of simultaneous vulcanization of two recycled rubber components into one solid product. Interlocking tiles are 27" x 27" nominal.
- > Resilient anti-fatigue surface that is excellent for free weight/work-out machine applications as well as rinks and animal care clinics.
- > Non-porous surface provides an excellent barrier to soil, spills, stains and odors.
- > Safety – exceeds OSHA and ADA standards for excellent traction and durability.
- > Combine custom logo capabilities and you have the most complete answer for your sports or commercial flooring needs.



the end user

tuflex® force™  
recycled rubber tile

Subcontractor: Hudson Everly  
Commercial Flooring  
Project: Cardiopulmonary Rehab  
at Winterpark Memorial,  
Winterhaven, Florida

# specifications



## order prefix:

TF = Tuflex® Force™

---

Tuflex® Force™ Recycled Rubber Flooring

Gauge 3/8"

Size Square Tiles: 27" x 27" (5.0625 Sq/Ft per tile)  
Interlocking Tiles: 27" x 27" (4.6046 Sq/Ft per tile)

Packaging Pallet (maximum 100 tiles per pallet)


Weight (lb) 11 lbs per piece

# prime sports™

Highly functional. Highly affordable. Prime Sports™ Flooring is a rubber recreational flooring that is well-conditioned to take on a rigorous workout or provide added walking comfort and slip-resistance. Designed for commercial, residential, industrial and fitness applications, Prime Sports™ Flooring is recommended for play areas, golf shops, fitness centers, home gyms, daycares, ramps, locker rooms, cardio areas, ice arenas and retail flooring. May contribute to LEED® CI and NC credits, MR 4 and MR 5.

## features and benefits

- > Outstanding sound and shock absorption.
- > Available in rolls, square edge tiles and interlocking tiles in four different gauges.
- > Choose from solid black, plus seven additional colors with black background.
- > All colors may contribute to the LEED® Green Building Certification System.
- > Can be used indoors and outdoors.
- > Low VOC emissions.
- > Standard 10% chip content with special orders available up to 90% chip content with one or multiple colors.



the end user

prime sports™  
rubber tile

Architect: Louis J. Aubert  
General Contractor: Trison Construction  
Subcontractor: Division 9, LLC  
Project: Crowne Plaza Hotel, Kenner, Louisiana



# specifications

## order prefix:

PSF = Prime Sports™ Flooring

---

### Prime Sports™ Flooring

Gauge 5/32", 1/4", 3/8", 1/2"

Size Rolls 48" x 49.5'

Square Edge Tiles: 36" x 36"

Interlocking Tiles: 36" x 36"

Packaging Unboxed tiles and rolls shrink wrapped and put on pallet

# flextuft®

FlexTuft® is miles away from ordinary rubber tile. Made from recycled tires, it can withstand repeated water dousing, high traffic, heavy loading and exposure to the elements. May contribute to LEED® CI and NC credits MR 4 and MR 5.

With FlexTuft® rubber tile, what's good for the environment is also good for the most challenging indoor and outdoor settings. In fact, this durable, anti-slip flooring meets ADA recommendations for ramps, so it is ideal for foyers, exercise facilities and stairways – indoors and outdoors.

## features and benefits

- > Modular tile units allow for diverse patterns in four popular color options.
- > Choose either vulcanized rubber backing or non-vulcanized backing.
- > Maintains easily – just vacuum regularly and spot clean as needed.
- > Outdoor installations may be hosed off and left to dry.
- > Durable, indoor/outdoor flooring has a lifetime delamination warranty.
- > Contains 90% recycled content.



the end user

### flextuft®

"The floor plan of our new offices, essentially two buildings joined at the middle, created some challenges. The warm brown color mixes well with our palette of reclaimed teak flooring and natural limestone tiles."

– Christopher Goggin, IIDA, LEED AP  
Senior Associate & Project Designer  
at Gensler

the end user

### flextuft® *(entryway image, right)*

Architect: Arcon Associates / Eric Olson  
Subcontractor: Vortex  
Project: Glenbrook North High School,  
Glenview, Illinois

"FlexTuft® provides a tough walk-off solution for a tough environment. The main entrance of a high school gets a lot of traffic. FlexTuft® stands up to the abuse, yet still looks great. The fact that it is made of recycled materials is a bonus."



# specifications

## order prefix:

FT = FlexTuft® Tile

Flextuft® Tile	12" x 12"	12" x 30"
Vulcanized Gauge	5/16" nominal	5/16" nominal
Non-Vulcanized Gauge	3/8" nominal	3/8" nominal
Pieces/Ctn	25	1 roll
Weight/Ctn Ft (lb)		
Vulcanized	50	60
Non-Vulcanized	52	66
Sq Ft/Ctn	25	30

Note: Add V or NV to the product number for vulcanized or non-vulcanized tile (e.g., FTNV-1 for FlexTuft® Tweed Non-Vulcanized tile).

FLEXCO® FlexTuft® Adhesive or 77 Solvent-Free Epoxy must be used with this product.

While various environmental conditions may alter the appearance of recycled raw materials used in FlexTuft® flooring, the effects are not necessarily undesirable. When exposed to direct sunlight and other elements, fading will occur.