

# Linoleum with NATURCote™

## Unsurpassed Color

- MARMORETTE™ and GRANETTE™, featuring CONTINUUM™, a simple, organized tonal step system that unites hue, value and chroma. This expanded and flexible range of color options offers fast and easy color selection.

## Superior Performance

Exclusive NATURCote™ UV-cured coating

- Non-strippable
- Dirt resistant
- Resists discoloration from high pH cleaners
- Improves scuff resistance
- Reduces damage from scratching
- Reduces water, chemicals and labor needed for routine maintenance

## Natural Sustainability

- Made from rapidly renewable raw materials comprised of cork, linseed oil and jute backing
- Recycled content
- Low VOC emissions – California Section 01350 compliant, third-party FloorScore™ certification and LEED® eligibility



LEED®

Online: [armstrong.com/linoleum](http://armstrong.com/linoleum)

MR4.0 ✓	Construction	Linoleum with NATURCote™
MR5.0	Width & Length	Sheet: 6 ft. 7 in. (2.0 m) wide, up to 98.4 ft. (30 m) long.
MR6.0 ✓	Thickness	0.080 in. (2.0 mm), 0.100 in. (2.5 mm), 0.125 in. (3.2 mm). Size availability below.
EQ4.3 ✓	National Avg. Installed Cost	US: \$4.00 – \$4.50 sq. ft. Canada: C\$4.00 – C\$4.50 sq. ft. Based on 0.080 in. thickness. See page 21.

\*Special order; variable lead times (contact COS), no minimum quantity.  
 †Special order; variable lead times (contact COS), minimum quantity of 1,000 sq. yd.

new colors

new




























**MARMORETTE™**

with **NATURCote™**

featuring **CONTINUUM™**  
COLOR + DESIGN









FloorScore™ certified

- Classic, sophisticated marbling featuring CONTINUUM™, an exclusive color system organized in tonal steps to unite hue, value and chroma
- Lower-cost install method and seamless design appearance with patented S-761 non-heat weld seaming system
- Low VOC emissions – California Section 01350 compliant, third-party FloorScore certification and LEED eligibility

<p><b>LP552</b> 2.5mm stone white</p>  <p>W1252</p>									
<p><b>LP553</b> 2.0mm* 2.5mm 3.2mm† smoke</p>  <p>W1253</p>	<p><b>LP053</b> 2.0mm* 2.5mm 3.2mm† gull gray</p>  <p>W1356</p>	<p><b>LP555</b> 2.5mm constellation</p>  <p>W1255</p>	<p><b>LP091</b> 2.5mm mushroom</p>  <p>W1791</p>	<p><b>LP092</b> 2.5mm sand</p>  <p>W1792</p>	<p><b>LP045</b> 2.0mm* 2.5mm parchment beige</p>  <p>W1245</p>	<p><b>LP084</b> 2.5mm hide</p>  <p>W1784</p>	<p><b>LP040</b> 2.0mm* 2.5mm 3.2mm† cream</p>  <p>W1270</p>		
<p><b>LP554</b> 2.5mm smolder</p>  <p>W1257</p>	<p><b>LP050</b> 2.0mm* 2.5mm 3.2mm† silver gray</p>  <p>W1250</p>	<p><b>LP556</b> 2.5mm atmosphere</p>  <p>W1258</p>	<p><b>LP090</b> 2.5mm pumice gray</p>  <p>W1790</p>	<p><b>LP506</b> 2.5mm the boardwalk</p>  <p>W1287</p>	<p><b>LP546</b> 2.0mm* 2.5mm 3.2mm† barefoot</p>  <p>W1271</p>	<p><b>LP065</b> 2.5mm light chocolate</p>  <p>W1240</p>	<p><b>LP070</b> 2.0mm* 2.5mm 3.2mm† bamboo tan</p>  <p>W1070</p>		
<p><b>LP096</b> 2.5mm obsidian</p>  <p>W1796</p>	<p><b>LP059</b> 2.0mm* 2.5mm 3.2mm† charcoal gray</p>  <p>W1380</p>	<p><b>LP557</b> 2.5mm nebula</p>  <p>W1207</p>	<p><b>LP089</b> 2.5mm lava</p>  <p>W1789</p>	<p><b>LP507</b> 2.5mm under the boardwalk</p>  <p>W1285</p>	<p><b>LP003</b> 2.5mm cocoa brown</p>  <p>W1703</p>	<p><b>LP509</b> 2.5mm summer camp</p>  <p>W1289</p>	<p><b>LP066</b> 2.5mm oak brown</p>  <p>W1262</p>		



MARMORETTE™ LP096 obsidian, LP040 cream, LP525 hey sailor

<p><b>LP076</b> yellow straw 2.5mm 3.2mm<sup>†</sup></p>  <p><b>W1276</b></p>	<p><b>LP098</b> fool's gold 2.0mm* 2.5mm 3.2mm<sup>†</sup></p>  <p><b>W1798</b></p>	<p><b>LP575</b> melon head 2.5mm new</p>  <p><b>W1275</b></p>	<p><b>LP510</b> not so innocent 2.5mm new</p>  <p><b>W1204</b></p>	<p><b>LP516</b> miss behavior<sup>†</sup> 2.5mm new</p>  <p><b>W1238</b></p>	<p><b>LP512</b> slightly frivolous 2.5mm new</p>  <p><b>W1201</b></p>	<p><b>LP522</b> purple mountains 2.5mm new</p>  <p><b>W1288</b></p>	<p><b>LP547</b> summer lovin' blue 2.5mm new</p>  <p><b>W1281</b></p>
<p><b>LP072</b> goldenrod 2.0mm* 2.5mm 3.2mm<sup>†</sup></p>  <p><b>W1272</b></p>	<p><b>LP571</b> summer morning 2.0mm* 2.5mm 3.2mm<sup>†</sup> new</p>  <p><b>W1274</b></p>	<p><b>LP519</b> blast off 2.5mm new</p>  <p><b>W1219</b></p>	<p><b>LP008</b> aztec red 2.0mm* 2.5mm 3.2mm<sup>†</sup></p>  <p><b>W1708</b></p>	<p><b>LP048</b> firebird red 2.0mm* 2.5mm 3.2mm<sup>†</sup></p>  <p><b>W1510</b></p>	<p><b>LP513</b> amped up 2.0mm* 2.5mm 3.2mm<sup>†</sup> new</p>  <p><b>W1202</b></p>	<p><b>LP523</b> purple people eater 2.5mm new</p>  <p><b>W1286</b></p>	<p><b>LP049</b> bluebird 2.0mm* 2.5mm 3.2mm<sup>†</sup></p>  <p><b>W1249</b></p>
<p><b>LP570</b> gold digger 2.5mm new</p>  <p><b>W1283</b></p>	<p><b>LP573</b> meltdown 2.5mm new</p>  <p><b>W1273</b></p>	<p><b>LP515</b> pop rocket 2.5mm new</p>  <p><b>W1205</b></p>	<p><b>LP511</b> brick house 2.5mm new</p>  <p><b>W1242</b></p>	<p><b>LP018</b> cherry red 2.5mm</p>  <p><b>W1718</b></p>	<p><b>LP514</b> dandy 2.5mm new</p>  <p><b>W1203</b></p>	<p><b>LP528</b> it's magic 2.5mm new</p>  <p><b>W1284</b></p>	<p><b>LP548</b> stars at night 2.5mm new</p>  <p><b>W1282</b></p>

LEED®

Online: [armstrong.com/linoleum](http://armstrong.com/linoleum)

MR4.0 ✓	Construction	Linoleum with NATURCote™
MR5.0	Width & Length	Sheet: 6 ft. 7 in. (2.0 m) wide, up to 98.4 ft. (30 m) long.
MR6.0 ✓	Thickness	0.080 in. (2.0 mm), 0.100 in. (2.5 mm), 0.125 in. (3.2 mm). Size availability below.
EQ4.3 ✓	National Avg. Installed Cost	US: \$4.00 – \$4.50 sq. ft. Canada: C\$4.00 – C\$4.50 sq. ft. Based on 0.080 in. thickness. See page 21.

\*Special order; variable lead times (contact COS), no minimum quantity.  
 †Special order; variable lead times (contact COS), minimum quantity of 1,000 sq. yd.

new colors

new



**MARMORETTE™ (cont.)**

with NATURCote™



featuring **CONTINUUM™**  
 COLOR + DESIGN

FloorScore™ certified

- Classic, sophisticated marbling featuring CONTINUUM™, an exclusive color system organized in tonal steps to unite hue, value and chroma
- Lower-cost install method and seamless design appearance with patented S-761 non-heat weld seaming system
- Low VOC emissions – California Section 01350 compliant, third-party FloorScore certification and LEED eligibility

<p>LP521 2.5mm pale blue eyes new</p> <p>W1220</p>	<p>LP524 2.5mm cookie monster new</p> <p>W1206</p>	<p>LP526 2.5mm ocean breeze new</p> <p>W1215</p>	<p>LP007 2.5mm blue wave</p> <p>W1707</p>	<p>LP020 2.5mm sweet grass</p> <p>W1720</p>	<p>LP530 2.5mm tree frog new</p> <p>W1256</p>
<p>LP023 2.0mm* serene blue 2.5mm 3.2mm†</p> <p>W1223</p>	<p>LP026 2.0mm* delft blue 2.5mm 3.2mm†</p> <p>W1224</p>	<p>LP068 2.0mm* blue spa 2.5mm 3.2mm†</p> <p>W1768</p>	<p>LP099 2.0mm* tidal blue 2.5mm 3.2mm†</p> <p>W1799</p>	<p>LP543 2.5mm home turf new</p> <p>W1032</p>	<p>LP000 2.0mm* parrot green 2.5mm 3.2mm†</p> <p>W1711</p>
<p>LP022 2.0mm* caspien blue 2.5mm 3.2mm†</p> <p>W1222</p>	<p>LP525 2.5mm hey sailor new</p> <p>W1208</p>	<p>LP527 2.5mm twilight new</p> <p>W1246</p>	<p>LP532 2.5mm new wave new</p> <p>W1232</p>	<p>LP544 2.5mm green horn new</p> <p>W1237</p>	<p>LP531 2.5mm tree hugger new</p> <p>W1266</p>



LEED®

Online: [armstrong.com/linoleum](http://armstrong.com/linoleum)

MR4.0 ✓	Construction	Linoleum with NATURCote™
MR5.0	Width & Length	Sheet: 6 ft. 7 in. (2.0 m) wide, up to 98.4 ft. (30 m) long.
MR6.0 ✓	Thickness	0.100 in. (2.5 mm).
EQ4.3 ✓	National Avg. Installed Cost	US: \$4.50 – \$5.00 sq. ft. Canada: C\$3.75 – C\$4.25 sq. ft. See page 21.

new colors

new















**LINORETTE™** with NATURCote™



FloorScore™ certified

- A bold blend of highlights and contrasts that coordinates with Armstrong's portfolio of flooring solutions
- Lower-cost install method and seamless design appearance with our patented S-761 non-heat weld seaming system
- Low VOC emissions – California Section 01350 compliant, third-party FloorScore certification and LEED eligibility

<p>LP476 yukon desert 2.5mm <b>new</b></p>  <p>W1605</p>	<p>LP425 andes brown 2.5mm</p>  <p>W1625</p>	<p>LP403 gobi sand 2.5mm</p>  <p>W1603</p>
<p>LP410 odessa red 2.5mm</p>  <p>W1610</p>	<p>LP460 grand canyon 2.5mm</p>  <p>W1660</p>	<p>LP470 gibraltar gold 2.5mm</p>  <p>W1670</p>
<p>LP450 madagascar violet 2.5mm</p>  <p>W1652</p>	<p>LP440 hudson valley blue 2.5mm</p>  <p>W1642</p>	<p>LP401 yuka tan 2.5mm</p>  <p>W1601</p>
<p>LP475 silver city 2.5mm <b>new</b></p>  <p>W1604</p>	<p>LP402 brisbane blue 2.5mm</p>  <p>W1602</p>	<p>LP420 serengeti green 2.5mm</p>  <p>W1620</p>



LINORETTE LP475 silver city

LEED®

Online: [armstrong.com/linoleum](http://armstrong.com/linoleum)

MR4.0 ✓	Construction	Linoleum with NATURCote™
MR5.0	Width & Length	Sheet: 6 ft. 7 in. (2.0 m) wide, up to 98.4 ft. (30 m) long.
MR6.0 ✓	Thickness	0.100 in. (2.5 mm) and 0.125 (3.2 mm). Size availability below.
EQ4.3 ✓	National Avg. Installed Cost	US: \$4.50 – \$5.00 sq. ft. Canada: C\$4.00 – C\$4.50 sq. ft. Based on 0.100 in. thickness. See page 21.

\*Special order; variable lead times (contact COS), no minimum quantity.  
 †Special order; variable lead times (contact COS), minimum quantity of 1,000 sq. yd.

new colors

new




**COLORETTE™** with NATURCote™



FloorScore™ certified

- Dynamic colors with subtle accents that coordinate with Armstrong's portfolio of flooring solutions
- Lower-cost install method and seamless design appearance with our patented S-761 non-heat weld seaming system
- Low VOC emissions – California Section 01350 compliant, third-party FloorScore certification and LEED eligibility

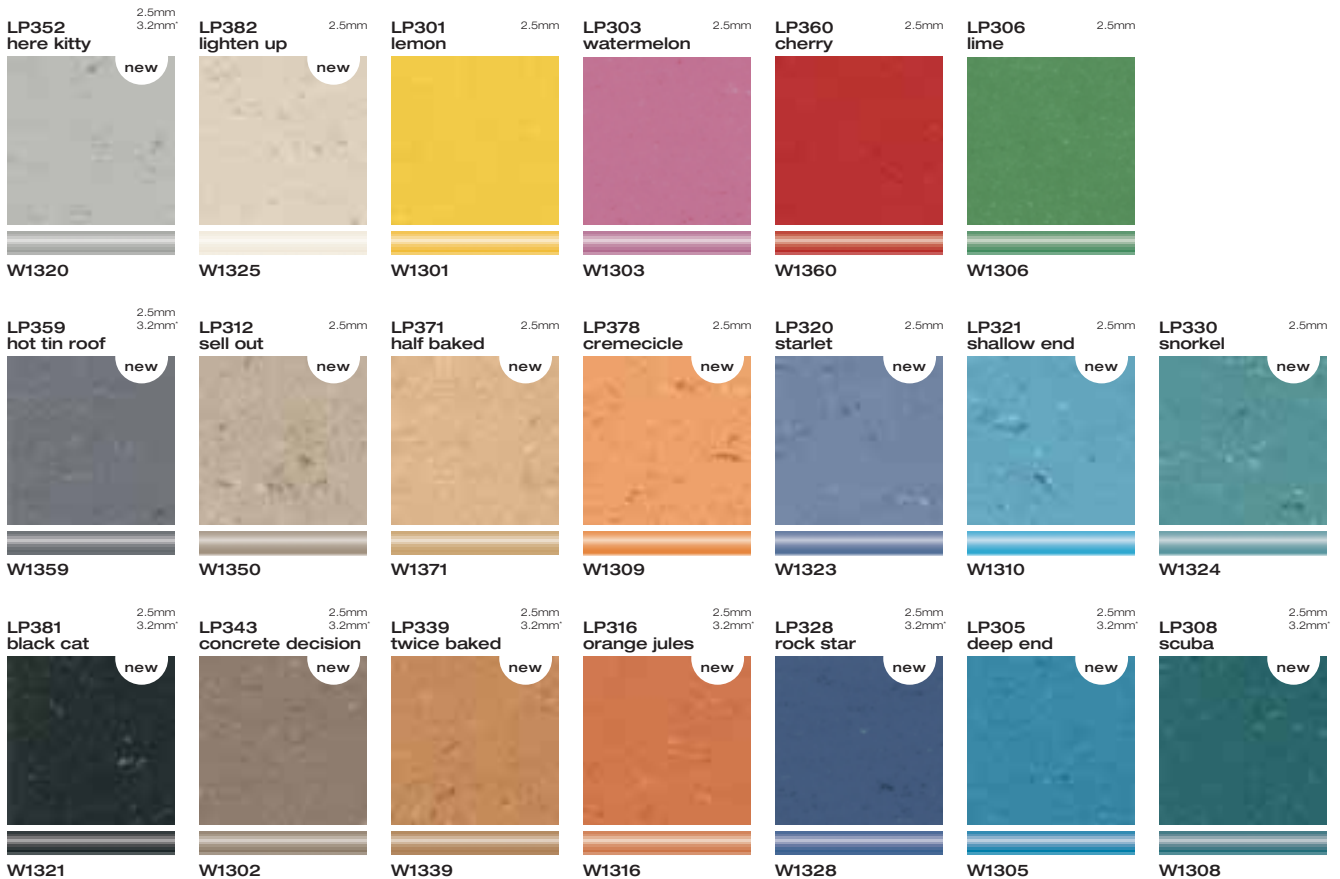

LEED®

Online: [armstrong.com/linoleum](http://armstrong.com/linoleum)

MR4.0 ✓	Construction	Linoleum with NATURCote™
MR5.0	Width & Length	Sheet: 6 ft. 7 in. (2.0 m) wide, up to 98.4 ft. (30 m) long.
MR6.0 ✓	Thickness	0.100 in. (2.5 mm).
EQ4.3 ✓	National Avg. Installed Cost	US: \$4.50 – \$5.00 sq. ft. Canada: C\$4.00 – C\$4.50 sq. ft. Based on 0.100 in. thickness. See page 21.

new colors

new




**GRANETTE™**

with NATURCote™

featuring **CONTINUUM™**  
COLOR + DESIGN

FloorScore™ certified

- Linear, natural granite appearance featuring CONTINUUM™, an exclusive color system organized in tonal steps to unite hue, value and chroma
- Lower-cost install method and seamless design appearance with our patented S-761 non-heat weld seaming system
- Low VOC emissions – California Section 01350 compliant, third-party FloorScore certification and LEED eligibility

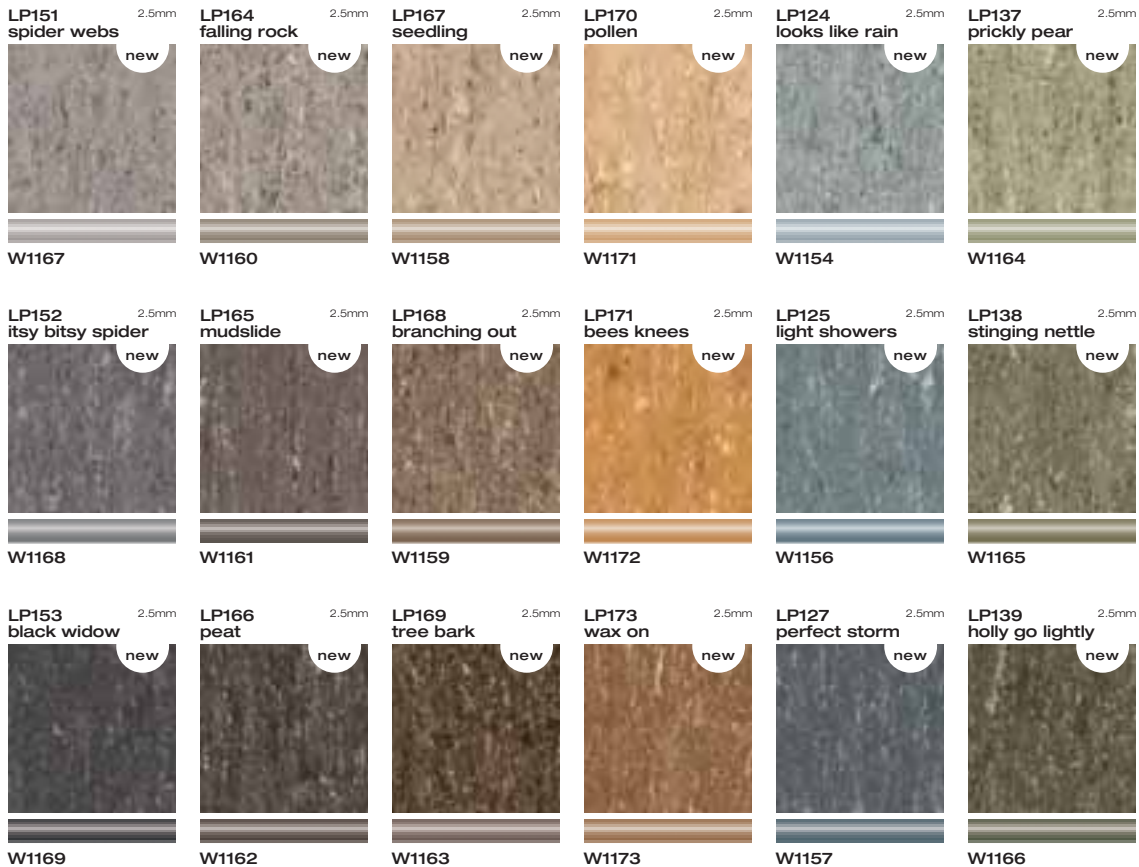

LEED®

Online: [armstrong.com/linoleum](http://armstrong.com/linoleum)

MR4.0 ✓	Construction	Linoleum with NATURCote™
MR5.0	Width & Length	Sheet: 6 ft. 7 in. (2.0 m) wide, up to 98.4 ft. (30 m) long.
MR6.0 ✓	Thickness	0.100 in. (2.5 mm) and 0.125 (3.2 mm). Size availability below.
EQ4.3 ✓	National Avg. Installed Cost	US: \$5.00 – \$5.50 sq. ft. Canada: C\$5.00 – C\$5.50 sq. ft. Based on 0.100 in. thickness. See page 21.

\*Special order; variable lead times (contact COS), no minimum quantity.  
 †Special order; variable lead times (contact COS), minimum quantity of 1,000 sq. yd.

new colors

new



**UNI WALTON™** with NATURCote™



FloorScore™ certified

- Solid color linoleum for creating borders, accents, insets and custom effects
- Lower-cost install method and seamless design appearance with our patented S-761 non-heat weld seaming system
- Low VOC emissions – California Section 01350 compliant, third-party FloorScore certification and LEED eligibility

<p>LP259 white</p>  <p>2.5mm 3.2mm*</p> <p>W1059</p>	<p>LP207 mustard</p>  <p>2.5mm</p> <p>new</p> <p>W1007</p>	<p>LP208 night blue</p>  <p>2.5mm</p> <p>new</p> <p>W1008</p>
<p>LP282 gray</p>  <p>2.5mm</p> <p>new</p> <p>W1003</p>	<p>LP210 orange red</p>  <p>2.5mm 3.2mm*</p> <p>W1510</p>	<p>LP230 dark green</p>  <p>2.5mm 3.2mm*</p> <p>new</p> <p>W1231</p>
<p>LP280 black</p>  <p>2.5mm 3.2mm*</p> <p>W1280</p>	<p>LP260 warm brown</p>  <p>2.5mm 3.2mm*</p> <p>W1060</p>	<p>LP236 moss</p>  <p>2.5mm</p> <p>new</p> <p>W1001</p>



UNI WALTON LP259 white, LP280 black MARMORETTE™ LP048 firebird red, LP076 yellow straw, LP516 miss behavior'





# TECHNICAL INFORMATION

## Comparative Data

Products (5)	Overall Thickness (nominal) (1)	Static Load Limit PSI (kg/cm <sup>2</sup> ) (2, 2a, 2b)	Durability (3)	Maintainability (3)	Resilience (3)	Reference Specs (4)
MARMORETTE™	0.080 in. (2.0 mm) 0.100 in. (2.5 mm) 0.125 in. (3.2 mm)	450 (31.6) (2a) 250 (17.6) (2b)	G VG E	E E E	G G VG	ASTM F 2034, Type I
LINORETTE™	0.100 in. (2.5 mm)	450 (31.6) (2a) 250 (17.6) (2b)	VG	E	G	ASTM F 2034, Type I
COLORETTE™	0.100 in. (2.5 mm) 0.125 in. (3.2 mm)	450 (31.6) (2a) 125 (8.8) (2b)	VG E	VG VG	G VG	ASTM F 2034, Type I
GRANETTE™	0.100 in. (2.5 mm)	450 (31.6) (2a)	VG	E	G	ASTM F 2034, Type I
UNI WALTON™	0.100 in. (2.5 mm) 0.125 in. (3.2 mm)	450 (31.6) (2a) 125 (8.8) (2b)	VG E	G (6) G (6)	G VG	ASTM F 2034, Type I

- Overall and wear layer thicknesses are nominal and subject to normal manufacturing variances.
- PSI: lbs./sq. in. (kg/cm<sup>2</sup>):  
a) ASTM F 970 < 0.005 in. residual indentation.  
b) ASTM F 970, subjective visual, no visually apparent indentation.
- Subjective ratings (Excellent, Very Good, Good, Fair) are in relation to other Armstrong® commercial resilient floors. Ratings are not directly related to any one test. They are broadly based on tests and experience of Armstrong R & D under varying conditions and circumstances. These ratings should NOT be used for comparison to ratings used by other manufacturers to rank their own products.
- Reference Specifications: Armstrong products are manufactured to meet or exceed specification requirements, except as noted.
- All products meet the following Fire Test Data:  
a) ASTM E 648 Flooring Radiant Panel Critical Radiant Flux – 0.45 watts/cm<sup>2</sup> or more, Class I  
b) ASTM E 662 Smoke Chamber Specific Optical Smoke Density – 450 or less.  
Numerical flammability ratings alone may not define product performance under actual fire conditions. These ratings are provided only for use in the selection of products to meet specified limits.
- UNI WALTON is recommended only for decorative borders and accents.

## Adhesives

Product	Adhesives	Seams
MARMORETTE LINORETTE COLORETTE GRANETTE UNI WALTON	S-780 full-spread; S-580 optional in flash cove areas only S-240 in heavy static and dynamic load areas	Recess scribe; heat-weld* or S-761 Seam Adhesive

\*Heat-welding is required when installing over radiant-heated subfloors in areas exposed to topical moisture and/or temperature fluctuations and when using S-240 Epoxy.

## Adhesive/Seaming System Options

Space	Full Spread S-780 with Heat Weld	Full Spread S-780 with S-761	Full Spread S-780	Full Spread S-240 with Heat Weld
Aseptic areas	Highly recommended	Not recommended	Not recommended	Optional*
Medium to heavy commercial traffic	Recommended	Recommended	Optional	Not recommended
Light to medium commercial traffic	Recommended	Recommended	Optional	Not recommended
Heavy static and dynamic load areas	Optional	Optional	Not recommended	Recommended
Heavy industrial areas	Not recommended	Not recommended	Not recommended	Not recommended

\*Only when heavy static and dynamic loads are used.

## Gauge Availability

Pattern	2.0 mm No Minimum	2.5 mm Stocked	2.5 mm Min 1,000 Sq Yds	3.2 mm No Minimum	3.2 mm Min 1,000 Sq Yds
<b>MARMORETTE</b>					
All Patterns: LP000, LP003, LP007, LP008, LP018, LP020, LP022, LP023, LP026, LP040, LP045, LP048, LP049, LP050, LP053, LP059, LP065, LP066, LP068, LP070, LP072, LP076, LP084, LP089, LP090, LP091, LP092, LP096, LP098, LP099, LP506, LP507, LP509, LP510, LP511, LP512, LP513, LP514, LP515, LP516, LP519, LP521, LP522, LP523, LP524, LP525, LP526, LP527, LP528, LP530, LP531, LP532, LP543, LP544, LP546, LP547, LP548, LP552, LP553, LP554, LP555, LP556, LP557, LP570, LP571, LP573, LP575		<b>X</b>			
LP000, LP008, LP022, LP023, LP026, LP040, LP045, LP048, LP049, LP050, LP053, LP059, LP068, LP070, LP072, LP098, LP099, LP513, LP546, LP553, LP571	<b>X</b>				
LP000, LP008, LP022, LP023, LP026, LP040, LP048, LP049, LP050, LP053, LP059, LP068, LP070, LP072, LP076, LP098, LP099, LP513, LP546, LP553, LP571					<b>X</b>
<b>LINORETTE</b>					
All Patterns: LP401, LP402, LP403, LP410, LP420, LP425, LP440, LP450, LP460, LP470, LP475, LP476		<b>X</b>			
<b>COLORETTE</b>					
All Patterns: LP301, LP303, LP305, LP306, LP308, LP312, LP316, LP320, LP321, LP328, LP330, LP339, LP343, LP352, LP359, LP360, LP371, LP378, LP381, LP382		<b>X</b>			
LP305, LP308, LP316, LP328, LP339, LP343, LP352, LP359, LP381			<b>X</b>	<b>X</b>	
<b>GRANETTE</b>					
All Patterns: LP124, LP125, LP127, LP137, LP138, LP139, LP151, LP152, LP153, LP164, LP165, LP166, LP167, LP168, LP169, LP170, LP171, LP173		<b>X</b>			
<b>UNI WALTON</b>					
All Patterns: LP207, LP208, LP210, LP230, LP236, LP259, LP260, LP280, LP282		<b>X</b>			
LP210, LP230, LP259, LP260, LP280				<b>X</b>	

## Maintenance\*

Product	Cleaners and Polishes	Polish	Low-Maintenance Options	
			No Polish Spray Buff	No Polish Dry Buff
MARMORETTE LINORETTE COLORETTE UNI WALTON GRANETTE	S-401, S-403, S-480, S-485, and S-495	✓	✓	Not recommended

\*See Armstrong publication F-8663 for further information.

Before making your color selection, expose linoleum samples to sunlight for at least four hours to remove the yellow cast that occurs naturally as part of the linoleum production process.

## Light Reflectivity Values in Percent

0-9	10-14	15-19	20-24	25-29	30-34	35-39	40-44	45-49	50-54	55-59
LP018	LP022	LP003	LP068	LP000	LP065	LP007	LP020	LP040	LP098	LP259
LP059	LP048	LP008	LP099	LP023	LP124	LP070	LP091	LP045		LP382
LP096	LP049	LP026	LP125	LP053	LP151	LP072	LP092	LP076		
LP208	LP089	LP050	LP138	LP090	LP164	LP084	LP312	LP170		
LP230	LP153	LP066	LP152	LP168	LP171	LP137	LP378	LP301		
LP260	LP166	LP127	LP172	LP330	LP316	LP167	LP403	LP352		
LP280	LP169	LP139	LP236	LP343	LP321	LP207	LP470	LP371		
LP381	LP210	LP165	LP282	LP401	LP475	LP335	LP530	LP552		
	LP328	LP308	LP303	LP425	LP526	LP521	LP546	LP555		
	LP360	LP402	LP305	LP440	LP556	LP571	LP575			
	LP507	LP410	LP306	LP476	LP570					
	LP511	LP450	LP320	LP506						
	LP514	LP509	LP359	LP510						
	LP525	LP513	LP420	LP512						
	LP527	LP523	LP460	LP516						
	LP528	LP531	LP515	LP519						
	LP548	LP532	LP522	LP543						
		LP544	LP524	LP553						
		LP554	LP547	LP573						
			LP557							

Measured under incandescent illumination (ASTM 1347). Types and patterns tested here are those most suited to commercial interiors where reflectivity is a major factor. Ratings for other patterns available upon specific request.

## National Average Installed Costs per Square Foot

Linoleum	US Dollars	Canadian Dollars
MARMORETTE™ 0.080 in. (2.0 mm)	\$4.00 – \$4.50	C\$4.00 – C\$4.50
MARMORETTE 0.100 in. (2.5 mm)	\$4.50 – \$5.00	C\$4.00 – C\$4.50
COLORETTE™ 0.100 in. (2.5 mm)	\$4.50 – \$5.00	C\$4.00 – C\$4.50
LINORETTE™ 0.100 in. (2.5 mm)	\$4.50 – \$5.00	C\$3.75 – C\$4.25
GRANETTE™ 0.100 in. (2.5 mm)	\$4.50 – \$5.00	C\$4.00 – C\$4.50
UNI WALTON™ 0.100 in. (2.5 mm)	\$5.00 – \$5.50	C\$5.00 – C\$5.50
MARMORETTE 0.125 in. (3.2 mm)	\$5.00 – \$5.50	C\$4.75 – C\$5.25
COLORETTE 0.125 in. (3.2 mm)	\$5.00 – \$5.50	C\$4.75 – C\$5.25
UNI WALTON 0.125 in. (3.2 mm)	\$5.50 – \$6.00	C\$5.25 – C\$6.00

Prices are approximations only. Actual prices will vary based on competitive bidding, local labor costs and job conditions. Estimated prices include material and labor figured on a 500-square-foot (46.45-square-meter) open-area installation without any special cuttings or special subfloor preparation.