



Complete System for shower room


Floors to match your imagination

Gerflor

Floor / wall complete system for shower rooms




K5

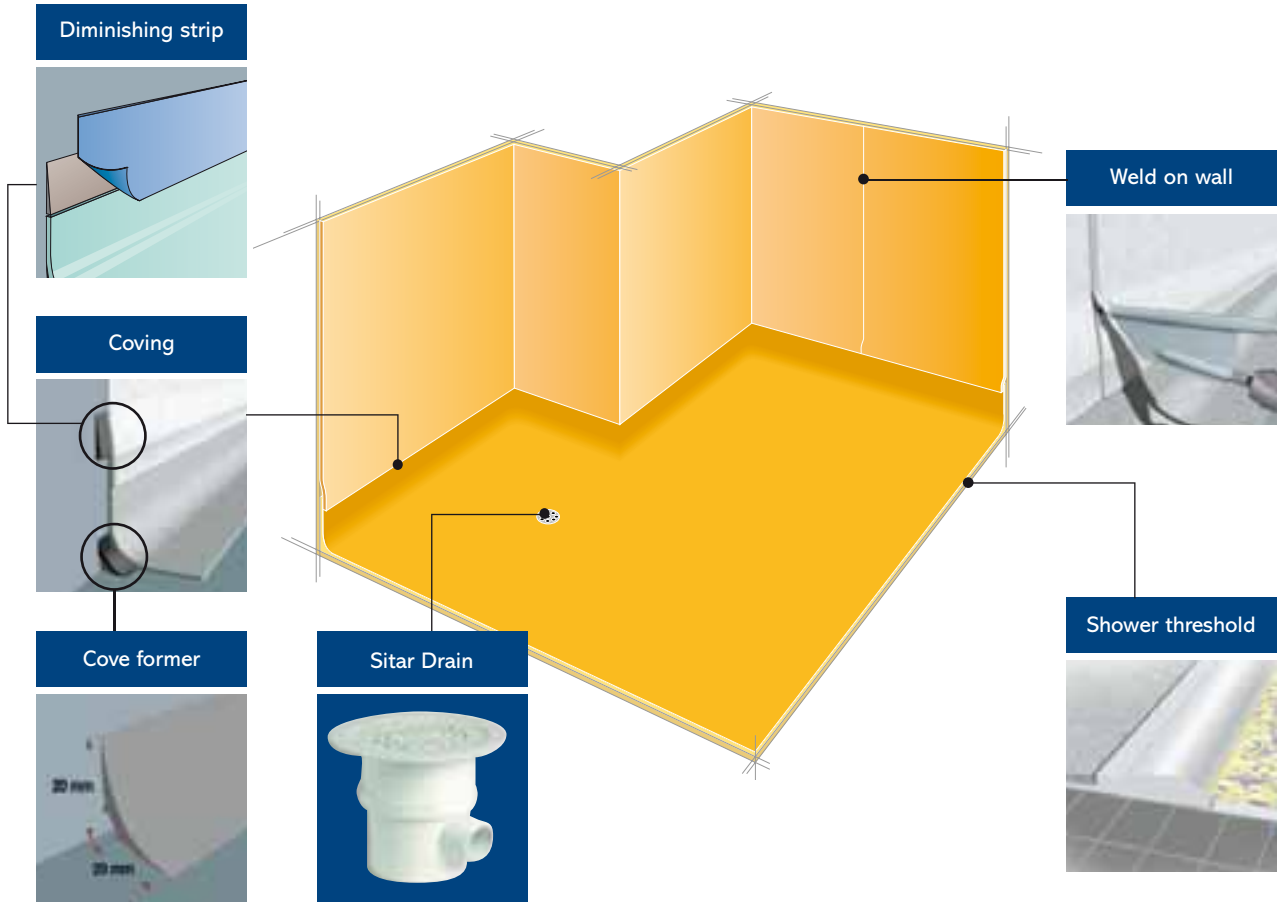

Taradouche mural

Is a wall cladding.
Colours can be coordinated with the floorcovering.

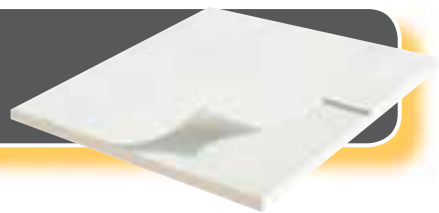


Brazilia SD



Flexible multilayered calandered floor covering

1 mm pure PVC wear layer
Backing reinforced with glass fibre grid

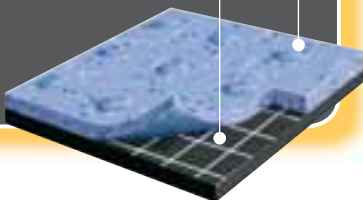

- **SAFETY:**
Embossed wear layer for wet bare foot traffic
- **HYGIENIC:**
Anti-bacterial and fungicidal
- **WATERTIGHT SYSTEM:**
All seams to be hot welded

Sanosol® treatment

Elegance SD



Flexible homogeneous calandered compacted floor covering

2.4 mm thick



Complete System for shower room

The new TARADOUCHE SHOWER SYSTEM consists of :

> FLOOR COVERINGS

BRAZILIA SD is a multilayered calandered floorcovering available in 2 m sheet, treated with SANOSOL®, an anti-bacterial and fungicidal treatment. It should be hot welded with a CR 40 welding rod.

It comprises a pure PVC wear layer over a through thickness design, (specifically embossed for wet barefoot traffic) and a flexible vinyl backing reinforced with a glass fibre grid.

Or

ELEGANCE SD is a flexible homogeneous calandered compacted floorcovering available in 2 m sheet, anti-bacterial and fungicidal, with a non directional polychrome design, to offer an even colour throughout the thickness. It should be hot welded with a CR 40 welding rod.

ELEGANCE SD is specifically embossed for wet barefoot traffic and has a group P wear rating.

> WALL COVERING

TARADOUCHE MURAL is a flexible vinyl sheet wall covering, available in 2 m sheet, which should be hot welded with a CR 41 welding rod.

It comprises a transparent vinyl wearlayer combined with a colour blended flexible vinyl underlayer.

			Brazilia SD	Elegance SD	Taradouche Mural
DESCRIPTION					
Total thickness	EN 428	mm	2.2 (on grainside)	2.4 (on grainside)	0.9
Weight	EN 430	g/m ²	2200	3100	1 500
Width / length of sheet	EN 426	cm/ml	200/20	200/20	200/30
CLASSIFICATION					
Standard / Product specification	EN 649	-	Heterogeneous vinyl flooring	Homogeneous vinyl flooring	Heterogeneous vinyl flooring
European classification	EN 685	Class	34 - 43	34 - 43	-
Fire rating	-	Class	C _{fl} -s1	B _{fl} -s1	Bs2d0
Slip resistance wet	EN 13 501-1	Class	A+B	A+B	-
PERFORMANCE					
Wear resistance	EN 660.1	mm	≤ 0.08	≤ 0.15	-
Wear group	EN 649	group	T	P	-
Dimensional stability	EN 434	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation	EN 433	mm	≤ 0.10	≤ 0.10	-
Thermal conductivity	EN 12 524	W/(m.K)	0.25	0.25	-
Colour fastness	EN 20 105-B02	-	≥ 6	≥ 6	≥ 6
Anti-bacterial and fungicidal	EN ISO 846	-	Sanosol®	Yes	Yes
Chemical resistance	EN 423	Class	Good	Good	Good

ACCESSORIES : SITAR drain, floor/wall diminishing strip, cove former, weldable PVC shower threshold, CA12 angle welding rods.

INSTALLATION :

Installation should be carried out in accordance with local standards. Subfloor to be flat, smooth hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours prior to installation at a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE :

No emulsion dressings or polish required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser.

Further installation and maintenance instructions are available from Gerflor.