


H2O Drive® VFD

5 HP - 150 HP (208-240V)
5 HP - 500 HP (380-480V)

Applications:

- Deep Well Submersible Pump Control
- Booster Pump Control
- Irrigation Pump Control

Four-Line LCD Display:

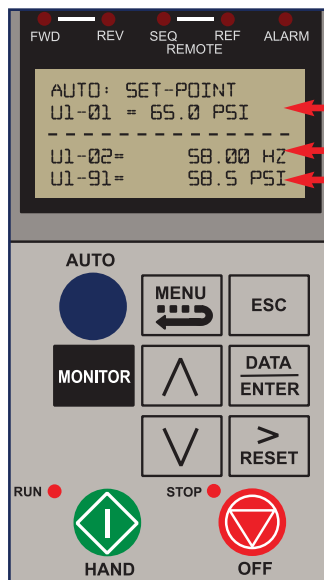


- ← Pressure Set-Point
- ← Motor Frequency
- ← Transducer Feedback



H2O Drive® VFD

Deep Well Submersible Pump Application

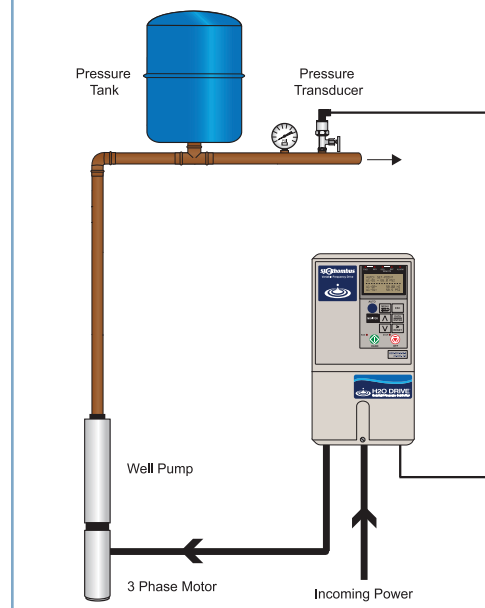

Features:

- P.I.D. control
- Adjustable electronic overload
- 0-200 PSI transducer, 4-20 mA signal
- Pre-charge control
- Thrust bearing control
- Advanced no-flow detection
- Dry run protection
- High pressure alarm
- Low pressure alarm
- Automatic system restart
- Multiple pressure set-points
- Multiple languages
- 7 digital inputs
- 2 analog inputs
- 3 relay outputs
- 2 analog outputs
- Modbus RTU communication
- Customization available
- Factory pre-programmed for your application
- NEMA 1 - IP 20 enclosure

Booster Pump Application

