



MARINO WARE®

**DRYWALL FRAMING
ACCESSORIES**





MARINO WARE®

THE BEST PRODUCTS, QUALITY, AND CUSTOMER SERVICE.

Marino\WARE® presents this brochure describing our line of drywall framing accessories. These components complement our structural framing line and complete Marino\WARE's® family of steel framing products. Our steel and vinyl components are furnished in uniform lengths and consistent quality. Marino\WARE® products are manufactured using steel industry standards. Hardness and ductility are monitored to assure the user ease in fabrication and penetration of screw fasteners.

Our large inventory of both finished product and coil steel allow us to readily satisfy your requests. Our fleet of trucks assures prompt deliveries and in many instances, next day delivery. Our experienced sales team, coupled with an extensive distribution network, make Marino\WARE® the obvious choice for your project.

For more information on our products and services, call 1-800-627-4661 or visit www.MarinoWARE.com.

GENERAL INFORMATION

STEEL THICKNESS:

| Product | | Design | | Minimum | | ASTM C645 Color Code |
|---------|------|--------|-------|---------|-------|-------------------------|
| Gauge | Mils | (in.) | (mm.) | (in.) | (mm.) | |
| 25 | 18 | .0188 | .4775 | .0179 | .4550 | Unmarked |
| 22 | 27 | .0283 | .7188 | .0269 | .6830 | Black |
| 20 | 30 | .0312 | .7925 | .0296 | .7518 | Pink |

ASTM SPECIFICATION DESCRIPTIONS

A1003 - Standard specification for steel sheet, carbon, metallic and nonmetal-coated for cold formed framing members

A653 - Standard specification for steel sheet, zinc-coated (galvanized) or zinc-iron alloy coated (galvannealed) by hot-dip process

A591 - Standard specification for steel sheet, electrolytic zinc-coated, for light coating weight (mass) applications

A924 - Standard specification for general requirements for steel sheet, metallic-coated by the hot-dip process

B69 - Standard specification for rolled zinc

C645 - Standard specification for nonstructural steel framing members

C754 - Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products

C1007 - Standard Specification for Installation of Load Bearing (Transverse and Axial) Steel Studs and Related Accessories

C1047 - Standard specification for accessories for gypsum wallboard and gypsum veneer base

C841 - Standard specification for installation of interior lathing and furring

C847 - Standard specification for metal lath

C1063 - Standard specification for installation of lathing and furring to receive interior and exterior Portland cement-based plaster

TECHNICAL SERVICES

MarinoWARE offers its customers free expert technical assistance with the selection and use of our products. If you have questions or need more information on any of the products listed in this catalog, contact our Technical Services department. Our knowledgeable staff is ready to assist you. In most cases Technical Services representatives can provide immediate responses.

Technical Services can be reached at 866-545-1545, or at technicalservices@marinoware.com.

DESIGNRITE™ SHOP DRAWINGS

MarinoWARE offers professional Engineered Shop Drawings. These drawings are created using AutoCAD software and are prepared for the submittal process. In addition, these drawings assist the installer in the construction process indicating product gauge, spacing and connections. Most shop drawings can be completed within 2-3 weeks.

LEED® INFORMATION - MATERIALS & RESOURCES

MarinoWARE® is proud to support the building industry in its efforts to create sustainable commercial and residential buildings. As a member of the U.S. Green Building Council (USGBC), MarinoWARE® supports the Leadership in Energy & Environmental Design (LEED®) program and has LEED® accredited professionals on staff. Using products manufactured by MarinoWARE® can aid in accumulating LEED® points in several categories.

For more information visit our website at www.MarinoWARE.com.

MarinoWARE®, a division of Ware Industries, is a long-standing manufacturer of steel framing products, and is committed to leading the industry in innovation, quality materials and customer service. Headquartered in South Plainfield, N.J., it has produced steel framing solutions for more than 70 years, and offers a wide choice of framing components and connectors that save their customers time, labor and cost. MarinoWARE® operates state-of-the-art production facilities in New Jersey, Georgia, Indiana and Texas, as well as a sales office in New York.

TABLE OF CONTENTS

| | |
|---|----|
| GENERAL INFORMATION | 1 |
| FURRING CHANNEL | 2 |
| RESILIENT CHANNEL | 3 |
| WAREWALL™ | 3 |
| METAL BEADS & TRIMS | 4 |
| VINYL DRYWALL FINISHING PRODUCTS | 5 |
| PAPER FACED METAL DRYWALL FINISHING | 7 |
| METAL LATH | 9 |
| STUCCO, VENEER, PLASTER BEADS & TRIMS | 11 |
| SYSTEM ACCESSORIES | 13 |

WARRANTY & LIMITATIONS

All products presented herein are warranted to the buyer to be free from defects in material and workmanship. The foregoing warranty is non-assignable and in lieu of and excludes all other warranties not expressly set forth herein, whether express or implied by operation of law or otherwise, including but not limited to any implied warranties of merchantability or fitness for a particular purpose. All details and specifications presented herein are intended as a general guide for the use of MarinoWARE® framing systems. These products should not be used without evaluation by a qualified engineer or architect to determine their suitability for a specific use.

MarinoWARE® assumes no responsibility for failure resulting from use of its details or specifications, or for failure resulting from improper application or installation of these products.

GOVERNING LAW

All issues arising in connection with your order and all transactions associated with it shall be interpreted according to the laws of the State of New Jersey, and all actions or other proceedings arising out of such issues shall be brought only in Superior Court, State of New Jersey, County of Essex, or United States District Court for the District of New Jersey. No action may be brought more than one year after accrual of the cause of action therefore.



www.MarinoWARE.com


© 2008 MarinoWARE®, a division of Ware Industries.
This document reflects the most current information available and supersedes any and all previous publications effective November 20, 2008 # MW-DWA-11/2008



FURRING CHANNEL

7/8" Furring Channel Physical Properties

| MW Type | SSMA | Min. Bare Metal Thickness ¹ (in) | Design Thickness (in) | Gross Area (in ²) | Effective Properties ^{3,4} | |
|----------|------------|---|-----------------------|-------------------------------|-------------------------------------|------------|
| | | | | | Ixx ² (in ⁴) | Ma (ft-lb) |
| 7/8DWF25 | 087F125-18 | 0.0179 | 0.0188 | 0.070 | 0.008 | 26.4 |
| 7/8DWF20 | 087F125-30 | 0.0296 | 0.0312 | 0.118 | 0.014 | 50.3 |
| 7/8DWF18 | 087F125-43 | 0.0428 | 0.0451 | 0.163 | 0.019 | 70.1 |

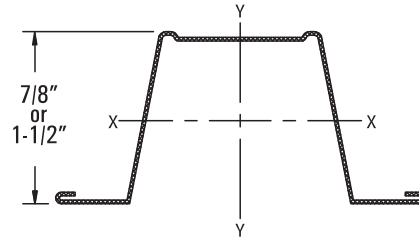

1. Minimum bare metal thickness is 95% of design thickness.
2. Moment of inertia given is for deflection calculations.
3. Effective properties are given as the minimum value for either positive or negative bending.
4. Effective properties based on Fy = 33ksi.

1-1/2" Furring Channel Physical Properties

| MW Type | SSMA | Min. Bare Metal Thickness ¹ (in) | Design Thickness (in) | Gross Area (in ²) | Effective Properties ^{3,4} | |
|----------|------------|---|-----------------------|-------------------------------|-------------------------------------|------------|
| | | | | | Ixx ² (in ⁴) | Ma (ft-lb) |
| 112DWF25 | 150F125-18 | 0.0179 | 0.0188 | 0.093 | 0.029 | 56.4 |
| 112DWF20 | 150F125-30 | 0.0296 | 0.0312 | 0.154 | 0.050 | 104.9 |
| 112DWF18 | 150F125-43 | 0.0428 | 0.0451 | 0.220 | 0.070 | 147.5 |

1. Minimum bare metal thickness is 95% of design thickness.
2. Moment of inertia given is for deflection calculations.
3. Effective properties are given as the minimum value for either positive or negative bending.
4. Effective properties based on Fy = 33ksi.

Allowable Ceiling Spans L/240

| MW Type | SSMA | Spans | Applied Load | | | | | | | | | |
|----------|------------|----------|-----------------------|--------|--------|-----------------------|--------|--------|-----------------------|--------|--------|--|
| | | | 4 psf | | | 6 psf | | | 13 psf | | | |
| | | | Hat Spacing (in) o.c. | | | Hat Spacing (in) o.c. | | | Hat Spacing (in) o.c. | | | |
| | | | 12 | 16 | 24 | 12 | 16 | 24 | 12 | 16 | 24 | |
| 7/8DWF25 | 087F125-18 | Single | 5'-2" | 4'-8" | 4'-1" | 4'-6" | 4'-1" | 3'-7" | 3'-6" | 3'-2" | 2'-9" | |
| | | Multiple | 6'-5" | 5'-10" | 5'-1" | 5'-7" | 5'-1" | 4'-2" | 4'-0" | 3'-5" | 2'-10" | |
| 7/8DWF20 | 087F125-30 | Single | 6'-2" | 5'-7" | 4'-10" | 5'-4" | 4'-10" | 4'-3" | 4'-2" | 3'-9" | 3'-3" | |
| | | Multiple | 7'-7" | 6'-11" | 6'-0" | 6'-8" | 6'-0" | 5'-3" | 5'-1" | 4'-8" | 3'-11" | |
| 7/8DWF18 | 087F125-43 | Single | 6'-10" | 6'-2" | 5'-5" | 6'-0" | 5'-5" | 4'-9" | 4'-7" | 4'-2" | 3'-8" | |
| | | Multiple | 8'-5" | 7'-8" | 6'-8" | 7'-5" | 6'-8" | 5'-10" | 5'-8" | 5'-2" | 4'-6" | |
| 112DWF25 | 150F125-18 | Single | 7'-10" | 7'-1" | 6'-3" | 6'-10" | 6'-3" | 5'-5" | 5'-3" | 4'-9" | 3'-11" | |
| | | Multiple | 9'-8" | 8'-10" | 7'-6" | 8'-6" | 7'-6" | 6'-1" | 5'-10" | 5'-1" | 3'-11" | |
| 112DWF20 | 150F125-30 | Single | 9'-4" | 8'-6" | 7'-5" | 8'-2" | 7'-5" | 6'-5" | 6'-3" | 5'-8" | 5'-0" | |
| | | Multiple | 11'-6" | 10'-6" | 9'-2" | 10'-1" | 9'-2" | 8'-0" | 7'-9" | 6'-11" | 5'-8" | |
| 112DWF18 | 150F125-43 | Single | 10'-5" | 9'-6" | 8'-3" | 9'-2" | 8'-3" | 7'-3" | 7'-1" | 6'-5" | 5'-7" | |
| | | Multiple | 12'-11" | 11'-9" | 10'-3" | 11'-3" | 10'-3" | 8'-11" | 8'-9" | 7'-11" | 6'-8" | |

Fy = 33ksi
Allowable ceiling spans based on effective properties.
Multiple span indicates two or more equal spans with channel continuous over center support.
Bearing length = 0.75".

Allowable Ceiling Spans L/360


| MW Type | SSMA | Spans | Applied Load | | | | | | | | | |
|----------|------------|----------|-----------------------|--------|--------|-----------------------|--------|--------|-----------------------|--------|--------|--|
| | | | 4 psf | | | 6 psf | | | 13 psf | | | |
| | | | Hat Spacing (in) o.c. | | | Hat Spacing (in) o.c. | | | Hat Spacing (in) o.c. | | | |
| | | | 12 | 16 | 24 | 12 | 16 | 24 | 12 | 16 | 24 | |
| 7/8DWF25 | 087F125-18 | Single | 4'-6" | 4'-1" | 3'-7" | 3'-11" | 3'-7" | 3'-1" | 3'-0" | 2'-9" | 2'-5" | |
| | | Multiple | 5'-7" | 5'-1" | 4'-5" | 4'-11" | 4'-5" | 3'-10" | 3'-9" | 3'-5" | 2'-10" | |
| 7/8DWF20 | 087F125-30 | Single | 5'-4" | 4'-10" | 4'-3" | 4'-8" | 4'-3" | 3'-8" | 3'-7" | 3'-3" | 2'-10" | |
| | | Multiple | 6'-8" | 6'-0" | 5'-3" | 5'-9" | 5'-3" | 4'-7" | 4'-6" | 4'-1" | 3'-6" | |
| 7/8DWF18 | 087F125-43 | Single | 6'-0" | 5'-5" | 4'-9" | 5'-2" | 4'-9" | 4'-1" | 4'-0" | 3'-8" | 3'-2" | |
| | | Multiple | 7'-5" | 6'-8" | 5'-10" | 6'-5" | 5'-10" | 5'-1" | 5'-0" | 4'-6" | 3'-11" | |
| 112DWF25 | 150F125-18 | Single | 6'-10" | 6'-3" | 5'-5" | 6'-0" | 5'-5" | 4'-9" | 4'-7" | 4'-2" | 3'-8" | |
| | | Multiple | 8'-6" | 7'-8" | 6'-9" | 7'-5" | 6'-9" | 5'-10" | 5'-8" | 5'-1" | 3'-11" | |
| 112DWF20 | 150F125-30 | Single | 8'-2" | 7'-5" | 6'-5" | 7'-1" | 6'-5" | 5'-8" | 5'-6" | 5'-0" | 4'-4" | |
| | | Multiple | 10'-1" | 9'-2" | 8'-0" | 8'-10" | 8'-0" | 7'-0" | 6'-9" | 6'-2" | 5'-5" | |
| 112DWF18 | 150F125-43 | Single | 9'-2" | 8'-3" | 7'-3" | 8'-0" | 7'-3" | 6'-4" | 6'-2" | 5'-7" | 4'-10" | |
| | | Multiple | 11'-3" | 10'-3" | 8'-11" | 9'-10" | 8'-11" | 7'-10" | 7'-7" | 6'-11" | 6'-0" | |

Fy = 33ksi
Allowable ceiling spans based on effective properties.
Multiple span indicates two or more equal spans with channel continuous over center support.
Bearing length = 0.75".

7/8" OR 1-1/2 FURRING CHANNEL

USE: As furring over masonry walls and hot rolled steel shapes. Cross furring for gypsum wallboard and plaster soffits and ceilings.

AVAILABLE GAUGES:
25, 20 & 18

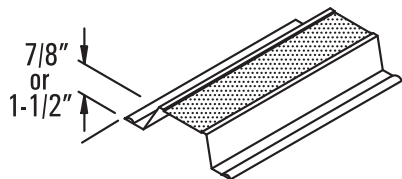

STOCK LENGTHS & PACKAGING:


- 25 Gauge Furring 10 & 12 Ft. 450 Pieces Per Skid
 - 20 Gauge Furring 10 & 12 Ft. 450 Pieces Per Skid
 - 18 Gauge Furring 10 & 12 Ft. 225 Pieces Per Skid
- Other Lengths available upon request.

FURRING CHANNEL CLIP

USE: Provides economical method of attaching 7/8" Drywall Furring Channels to 1-1/2" Cold Rolled Channel.

NOTE: Alternate direction of every other clip along cold rolled channel.

PACKAGING: 500 Pieces per box.

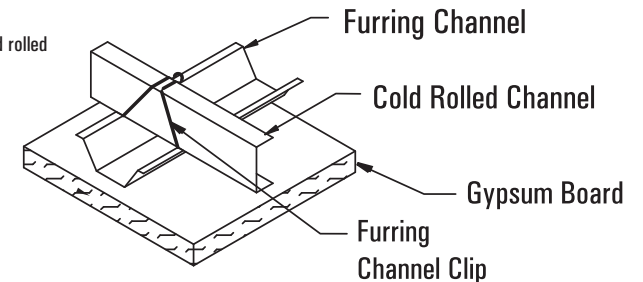

RESILIENT CHANNELS

RESILIENT CHANNEL – RC-1 & RC-2

USE: As furring over wood or steel framed walls and ceilings. Reduced contact with supporting members offers economical means for reducing sound transmission.

Resilient Channel (RC-1)




Resilient Channel (RC-2)



Note: STC ratings are not available for RC-2. No test data is available for this product.

INSTALLATION (WALLS):


Attach RC-1 Resilient Channels with the attachment flange down and at right angles to the studs. Position bottom channel with attachment flange up for ease of attachment. Fasten resilient channels to steel studs with 3/8" Type S pan head screws, to wood studs with 1-1/4" Type W screws. Locate RC-1 2" max up from the floor and within 6" of the ceiling and at no more than 24" on center intervals (16" on center max for some veneer plaster assemblies). Extend RC channels into all corners and attach to corner framing. Splice channels directly over studs by nesting (not butting) the channels and driving fasteners through both flanges into support.



Resilient Channel (RC-1) Application

INSTALLATION (CEILINGS):

Attach RC-1 Resilient Channels at right angles to the joists. Fasten the resilient channels to the joists with proper screw fasteners as stated above. Install resilient channels 24" on center max. When joist spacing is 16" on center and 16" on center max. When joist spacing is 24" on center. One or two layers of gypsum board may be used.



Resilient Channel (RC-1) Ceiling Application

WAREWALL® SNAP-IN DRYWALL FRAMING SYSTEM

WAREWALL®

USE: The Warewall® Snap-In Drywall Framing System is an innovative method for constructing interior gypsum drywall partitions. It consists of interlocking steel stud and track sections which are easy to install and offer many advantages over old-fashioned wood and conventional metal framed assemblies.


FEATURES:

- An ecologically appealing alternative to wood framing. Steel is the most recycled material.
- Non-combustible. Steel does not contribute "fuel" to a fire.
- Lightweight and easy to handle.
- Insect and vermin proof.
- Resistant to rot and warp. Gypsum wallboard is screw attached to the studs thus eliminating unsightly "nail pops" which are often the result of the drying and shrinking of wood framing.
- Knurled flanges on stud to prevent slipping of the drywall screws during installation.
- Pre-punched with service holes to ease installation of wiring, plumbing, etc.


INSTALLATION:

Warewall® reduces wall installation time. Our unique dimpled track system pre-determines the stud spacing thus eliminating time consuming measuring. Dimples are located 8" on center to accommodate both 16" and 24" on center stud spacing. Simply align the dimples of the top and bottom track, insert the stud in the track, and twist in place. Warewall keeps the studs positioned without the need for track to stud screw attachments.

Available in 1-5/8", 2-1/2" and 3-5/8" depths and 25 & 20 gauge.




INSERT STUD IN WAREWALL® TRACKS & TWIST IN PLACE...NO SCREWS REQUIRED

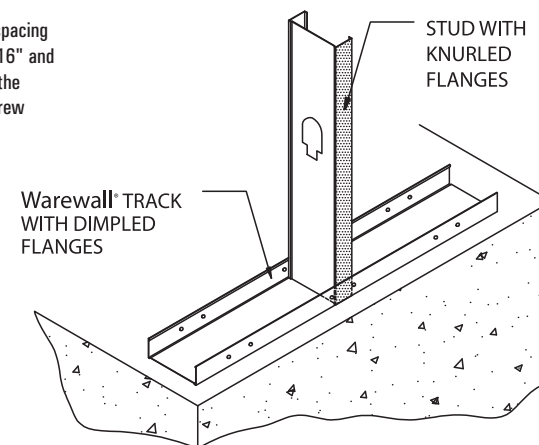

METAL BEADS & TRIMS


1 1/4" CORNER BEAD

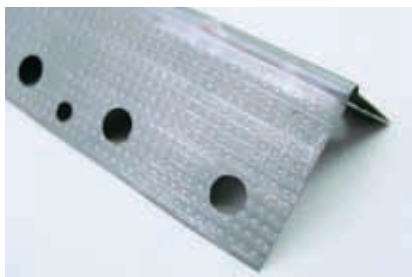

USE: Reinforcement for outside corners of gypsum wallboard partitions.

STOCK LENGTHS & PACKAGING:

- 6 Ft. 10 in 75 pieces per carton
- 8 Ft. 63 pieces per carton
- 9 Ft. 56 pieces per carton
- 10 Ft. 50 pieces per carton
- 12 Ft. 42 pieces per carton



NOTE: Available in shiny or dull finish.

1/2" & 5/8" U TRIM




USE: Channel type trim that provides a protective edge for wallboard where wall openings or where the board terminates to other surfaces. The nailing flange is knurled to improve adherence of coatings.

STOCK LENGTHS:


10 Ft.

PACKAGING:

50 pieces per carton



1/2" & 5/8" J TRIM

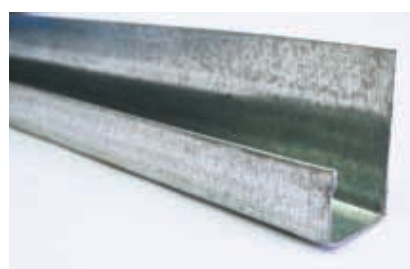


USE: Channel type trim that provides a protective edge for wallboard where finish spackling is not required.

STOCK LENGTHS:


10 Ft.

PACKAGING:

50 pieces per carton



1/2" & 5/8" L TRIM

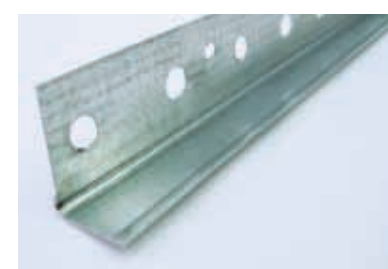


USE: Angle type drywall trim used as a finished edge after the wallboard has been attached.

STOCK LENGTHS:


10 Ft.

PACKAGING:

50 pieces per carton



K-RITE CORNER BEAD

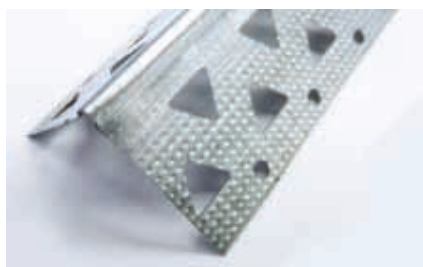


USE: K-Rite corner bead is compatible with all brands of one and two coat plaster systems or multi-layer drywall construction. Perfect choice for repairs, column construction and new construction.

STOCK LENGTHS:


10 Ft.

PACKAGING:

50 pieces per carton



VENEER CORNER (MINI BEAD 800/900)

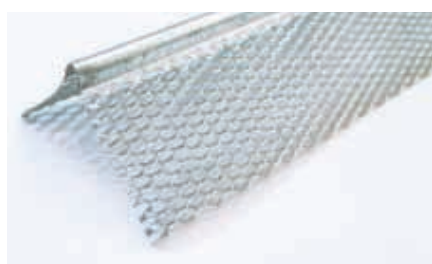

USE: Provides an effective plaster key and eliminates shadowing

STOCK LENGTHS:

10 Ft.

PACKAGING:

50 pieces per carton

ZINC CONTROL JOINT 093



USE: Relieves the stresses from expansion and contraction across the joint in large ceiling and wall areas


STOCK LENGTHS:

10 Ft.

PACKAGING:

50 pieces per carton

DOUBLE V EXPANSION JOINT

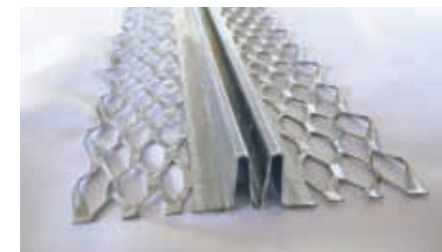

USE: Relieves the stresses of expansion and contraction in large plaster areas.

STOCK LENGTHS:

10 Ft.

PACKAGING:

24 pieces per carton




VINYL DRYWALL FINISHING PRODUCTS

CORNER BEAD

Provides rigid protection for the exposed edges of a wall; which can be nailed or staple applied. Flanges are perforated for positive joint compound bond.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 50 | 400 |
| 10' | 50 | 500 |



ARCHWAY CORNER BEAD

A high quality trim board that can be used in a variety of radius applications.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 10' | 50 | 500 |



3/4" BULLNOSE CORNER BEAD

Used in applications with high traffic or subject to high abuse. Gives corners a smooth rounded edge.


| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 35 | 280 |
| 10' | 35 | 350 |



3/4" BULLNOSE ARCHWAY

Flexes for archways. This bead finishes arched and other curves perfectly.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 35 | 280 |
| 10' | 35 | 350 |



PREMIUM VINYL

Each of our drywall finishing products will perform to the standards you demand. MarinoWARE® vinyl products are produced with state of the art machinery to provide top quality materials and money-saving prices. All of our vinyl products are specially treated for maximum mud adhesion and are 100% corrosion proof. If you're a professional installer or you like to do it yourself, you will find our premium vinyl accessories provide consistent quality, ease of installation, and better results on every job.

3/4" BULLNOSE SPLAY BEAD

Adjusts easily to a variety of angles making it a very versatile product.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 35 | 280 |
| 10' | 35 | 350 |



3/4" BULLNOSE INSIDE BEAD

Similar to our Bullnose Splay for inside corners. Versatile product adjusts easily to angles.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 10' | 35 | 350 |



VINYL DRYWALL FINISHING PRODUCTS

SPLAY BEAD

This splay bead adjusts easily to a variety of angles.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 50 | 400 |
| 10' | 50 | 500 |



2 & 3 WAY BULLNOSE CORNERS

2-Way: For a professional finish where two bullnose corners meet @ 90°.

3-Way: For a professional finish where three bullnose corners meet @ 90°.

Each Corner is packaged in 50 Pcs/Box



L TEAR-STRIP

L configuration with a clean break tear strip; which saves time and creates a cleaner finish.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 10' | 50 | 500 |



J-TRIM

A high quality trim that provides a finished edge at gypsum board stops. Great at ceiling intersections and stops around doors & windows. Readily accepts paint.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 50 | 400 |
| 10' | 50 | 500 |



L-TRIM

A sturdy vinyl trim for mud on applications.


| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 80 | 640 |
| 10' | 80 | 800 |



CONTROL JOINT / E-Z STRIP

An extruded vinyl expansion control joint designed to allow up to 1/4" of movement in veneer plaster and drywall applications.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 10' | 25 | 250 |



1-1/2" RADIUS BULLNOSE CORNER BEAD

Specially coated for superior finish adhesion and is twice the radius of our standard vinyl bullnose.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 30 | 240 |
| 10' | 30 | 300 |
| 12' | 30 | 360 |



1-1/2" RADIUS BULLNOSE ARCHWAY CORNER BEAD

A compliment to our 1-1/2" Bullnose Corner Bead, this bead finishes arches and other curves perfectly.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 30 | 240 |
| 10' | 30 | 300 |



1-1/2" RADIUS SPLAYED BULLNOSE CORNER BEAD

This splay bead adjusts easily to a variety of angles demanding a smoother finished edge.

| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 30 | 240 |
| 10' | 30 | 300 |




PAPER-FACED METAL DRYWALL FINISHING PRODUCTS


PREMIUM PAPER-FACED METAL PRODUCTS

- Quick and easy installation.
- More absorbency to cure faster and prevent edge cracking.
- More pronounced anchors and dimples for better adherence and joint-compound thickness.
- Greater wet strength.
- Resistance to balling or delamination.

INSIDE CORNER kwikSTIK - TAPE ON:




USE: Manufactured for precise inside corners and provides quick and easy installation.



| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

EXTRA WIDE OUTSIDE CORNER kwikSTIK - TAPE ON:



USE: Designed for open angle wall intersections on inside open angle corners.




| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 7' | 50 | 350 |
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

DELUXE SUPER WIDE OUTSIDE CORNER kwikSTIK DELUXE SUPER WIDE - TAPE ON:




USE: Provides the same extra coverage as P1 Super Wide outside corners and is manufactured with ease and speed of installation in mind.




| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 7' | 50 | 350 |
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

L 1/2" PAPER TRIM kwikSTIK TRIM:




USE: L-shaped 1/2" and 5/8" trim is designed for a clean, professional finish. Best for areas where 1/2" and 5/8" drywall runs adjacent to masonry walls, cinder blocks, drop ceilings, beams, unfinished doorways, or door jams.




| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 7' | 50 | 350 |
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

L 5/8" PAPER TRIM kwikSTIK TRIM:



USE: L-shaped 1/2" and 5/8" trim is designed for a clean, professional finish. Best for areas where 1/2" and 5/8" drywall runs adjacent to masonry walls, cinder blocks, drop ceilings, beams, unfinished doorways, or door jams.



| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 7' | 50 | 350 |
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

PAPER-FACED METAL DRYWALL FINISHING PRODUCTS

MICRO BEAD OUTSIDE CORNER kwikSTIK MICRO BEAD -TAPE ON:




USE: Manufactured with ease and speed of installation in mind. With the smaller bead and wider flanges, this product goes up fast and requires less mudding, saving both time and money.




| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 7' | 50 | 350 |
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

OPEN ANGLE / SPLAY OUTSIDE CORNER kwikSTIK OS SPLAY -TAPE ON:



USE: Designed for wider offset outside corners providing easier installation and more consistent mudding.



| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

SOUTHWESTERN STANDARD BULLNOSE kwikSTIK SLOK - TAPE ON:




USE: A less expensive substitute for the 3/4" bullnose outside corner and offers the same smooth rounded finish.



| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 7' | 50 | 350 |
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

SLOK BULLNOSE kwikSTIK SLOK - TAPE ON:



USE: This bullnose outside corner provides an elegant, smooth finish.



| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 7' | 50 | 350 |
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

SLOK EXTRA WIDE BULLNOSE kwikSTIK SLOK NXW - NAIL ON:



USE: This bullnose has a wider 7/8" flange which allows for easier installation and added corner coverage when nails, screws, or staples are being used.



| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 7' | 50 | 350 |
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

SLOK OPEN ANGLE / SPLAY BULLNOSE kwikSTIK SLOK NOS - NAIL ON:



USE: Provides a clean and smooth bullnose finish on offset outside corners where nails, screws, or staples are required.



| Lath | Pcs/Ctn | Ft/Ctn |
|------|---------|--------|
| 8' | 50 | 400 |
| 9' | 50 | 450 |
| 10' | 50 | 500 |

METAL LATH PRODUCTS

DIAMOND MESH LATH



USE: Manufactured by slitting and stretching galvanized steel to form small openings to allow the keying of plaster so it will bond to the lath. Diamond Mesh Lath can be bent easily to create curved surfaces.

SIZE:
27" x 96" (686 mm x 2440 mm)

WEIGHTS:
1.75 lbs/yd² - (End Not Painted)
2.50 lbs/yd² - Regular (End Painted Blue)
2.50 lbs/yd² - Deluxe (End Painted White)
3.40 lbs/yd² - (End Painted Red)

| Approx. Lath Weight | | Finish | Bundle Quantity | | | | |
|---------------------|----------------------|--------|-----------------|--------|--------|------|--------|
| lbs/yd ² | (kg/m ²) | | No. Pcs. | Weight | | Area | |
| 1.75 | (0.9) | x | 10 | 35 | (15.9) | 20 | (16.7) |
| 2.50 Regular | (1.1) | x | 10 | 40 | (18.2) | 20 | (16.7) |
| 2.50 Deluxe | (1.4) | x | 10 | 50 | (22.7) | 20 | (16.7) |
| 3.40 | (1.8) | x | 10 | 68 | (30.8) | 20 | (16.7) |

PAPERBACKED DIAMOND MESH LATH



USE: Asphalt paper is factory bonded to the back. The paper conforms to Federal Specification UU-B-790a, type 1, grade D, style 2.

SIZE:
27" x 96" (686 mm x 2440 mm)

END PAINTING:
Same as non-paperbacked diamond mesh lath. Available in all offsets

| Approx. Lath Weight | | Finish | Bundle Quantity | | | | |
|---------------------|----------------------|--------|-----------------|--------|--------|------|--------|
| lbs/yd ² | (kg/m ²) | | No. Pcs. | Weight | | Area | |
| 1.75 | (0.9) | x | 10 | 40 | (18.2) | 20 | (16.7) |
| 2.50 Regular | (1.1) | x | 10 | 45 | (20.5) | 20 | (16.7) |
| 2.50 Deluxe | (1.4) | x | 10 | 55 | (25.0) | 20 | (16.7) |
| 3.40 | (1.8) | x | 10 | 73 | (33.2) | 20 | (16.7) |

SELF-FURRING DIAMOND MESH LATH



USE: Uses the same mesh configuration as Diamond Mesh Lath but made with 1/4" dimple indentations spaced 1-1/2" o.c. each way. Used as exterior stucco base, column fireproofing and re-plastering over old surfaces. Available in galvanized only.

SIZE:
27" x 96" (686 mm x 2440 mm)

WEIGHTS:
1.75 lbs/yd² - (End Not Painted, only Yellow Stripe)
2.50 lbs/yd² - Regular (End Painted Blue w/ Yellow Stripe)
2.50 lbs/yd² - Deluxe (End Painted White w/ Yellow Stripe)
3.40 lbs/yd² - (End Painted Red w/ Yellow Stripe)

| Approx. Lath Weight | | Finish | Bundle Quantity | | | | |
|---------------------|----------------------|--------|-----------------|--------|--------|------|--------|
| lbs/yd ² | (kg/m ²) | | No. Pcs. | Weight | | Area | |
| 1.75 | (0.9) | x | 10 | 35 | (15.9) | 20 | (16.7) |
| 2.50 Regular | (1.1) | x | 10 | 40 | (18.2) | 20 | (16.7) |
| 2.50 Deluxe | (1.4) | x | 10 | 50 | (22.7) | 20 | (16.7) |
| 3.40 | (1.8) | x | 10 | 68 | (30.8) | 20 | (16.7) |

PAPERBACKED SELF-FURRING DIAMOND MESH LATH



USE: Uses same mesh configuration as Diamond Mesh Lath but made with 1/4" dimple indentations spaced 1-1/2" o.c. each way. Used as exterior stucco base, column fireproofing and re-plastering over old surfaces. Available in galvanized only.


SIZE:
27" x 96" (686 mm x 2440 mm)

WEIGHTS:
1.75 lbs/yd² - (End Not Painted, only Yellow Stripe)
2.50 lbs/yd² - Regular (End Painted Blue w/ Yellow Stripe)
2.50 lbs/yd² - Deluxe (End Painted White w/ Yellow Stripe)
3.40 lbs/yd² - (End Painted Red w/ Yellow Stripe)

| Approx. Lath Weight | | Finish | Bundle Quantity | | | | |
|---------------------|----------------------|--------|-----------------|--------|--------|------|--------|
| lbs/yd ² | (kg/m ²) | | No. Pcs. | Weight | | Area | |
| 3.40 | (1.8) | x | 10 | 68 | (30.8) | 20 | (16.7) |

METAL LATH PRODUCTS

1/8" FLAT RIB LATH

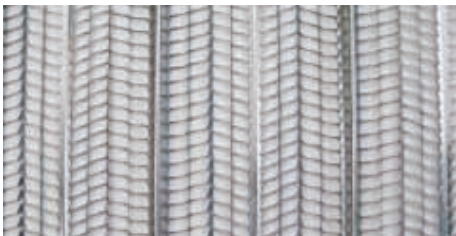

USE: 1/8 inch Flat Rib Lath provides additional rigidity for horizontal stucco applications. This product can also be used extensively as a base for ceramic tile.

SIZE:
27" x 96" (686 mm x 2440 mm)

WEIGHTS:
3.40 lbs/yd² - (End Painted Red)

| Approx. Lath Weight | | Finish | Bundle Quantity | | | | |
|---------------------|----------------------|---------|-----------------|---------|-------------|--------------------|--------------------------|
| lbs/yd ² | (kg/m ²) | | No. Pcs. | Weight | | Area | |
| 3.40 | (1.8) | Galv. x | 10 | lbs. 68 | (kg) (30.8) | yd ² 20 | (m ²) (16.7) |

3/8" HIGH RIB LATH



USE: Superior spanning characteristics over common expanded metal laths, suited for horizontal applications such as ceilings and soffits. Its 3/8" deep ribbed configuration is a self-furring feature. Designed for application on 24" on center.

SIZE:
27" x 96" (686 mm x 2440 mm)

| Approx. Lath Weight | | Finish | Bundle Quantity | | | | |
|---------------------|----------------------|---------|-----------------|---------|-------------|--------------------|--------------------------|
| lbs/yd ² | (kg/m ²) | | No. Pcs. | Weight | | Area | |
| 3.40 | (1.8) | Galv. x | 10 | lbs. 68 | (kg) (30.8) | yd ² 20 | (m ²) (16.7) |
| 2.75 | (1.8) | Galv. x | 10 | lbs. 55 | (kg) (30.8) | yd ² 20 | (m ²) (16.7) |

V-GROOVE MESH LATH



USE: For exterior stucco work over sheathing and as a plaster base over masonry walls. Self-furring embossed "V" groove holds the lath away from the surface to aid in the keying of stucco to the lath.

SIZE:
27" x 96" (686 mm x 2440 mm)

WEIGHTS:
3.40 lbs/yd² - (End Painted Red w/ Yellow Stripe)

| Approx. Lath Weight | | Finish | Bundle Quantity | | | | |
|---------------------|----------------------|---------|-----------------|---------|-------------|--------------------|--------------------------|
| lbs/yd ² | (kg/m ²) | | No. Pcs. | Weight | | Area | |
| 3.40 | (1.8) | Galv. x | 10 | lbs. 68 | (kg) (30.8) | yd ² 20 | (m ²) (16.7) |

PAPERBACKED V-GROOVE MESH LATH




USE: Same as V-Groove with asphalt paper factory bonded to the back. Paper conforms to Federal Specification UU-B-790a, type 1, grade D, style 2.

SIZE:
27" x 96" (686 mm x 2440 mm)


END PAINTING:
Same as non-paperbacked diamond mesh lath.
* Available in all offsets *

| Approx. Lath Weight | | Finish | Bundle Quantity | | | | |
|---------------------|----------------------|---------|-----------------|---------|-------------|--------------------|--------------------------|
| lbs/yd ² | (kg/m ²) | | No. Pcs. | Weight | | Area | |
| 1.75 | (0.9) | Galv. x | 10 | lbs. 40 | (kg) (18.2) | yd ² 20 | (m ²) (16.7) |
| 2.50 Regular | (1.1) | Galv. x | 10 | lbs. 45 | (kg) (20.5) | yd ² 20 | (m ²) (16.7) |
| 2.50 Deluxe | (1.4) | Galv. x | 10 | lbs. 55 | (kg) (25.0) | yd ² 20 | (m ²) (16.7) |
| 3.40 | (1.8) | Galv. x | 10 | lbs. 73 | (kg) (33.2) | yd ² 20 | (m ²) (16.7) |

CORNERITE

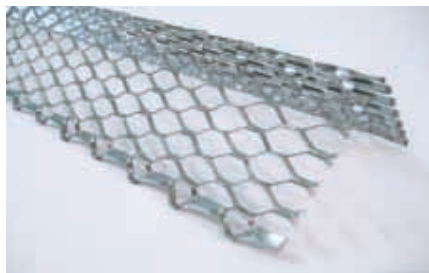


USE: Expanded mesh component that is used as corner reinforcement on interior angles where lath is not carried around and over non-ferrous bases such as masonry and wood lath.



| Size | Box Qty. | Length |
|------|----------|--------|
| 2" | 75 | 8' |
| 3" | 75 | 8' |

STRIP LATH


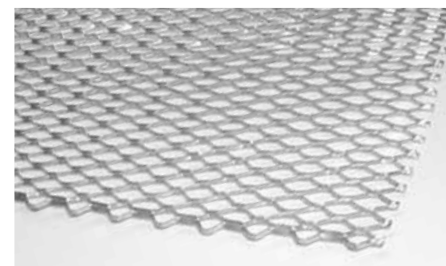


USE: An expanded mesh product used to fill voids in wire lath construction and as a base for wire lath patches.

| Size | Box Qty. | Length |
|------|----------|--------|
| 4" | 75 | 8' |
| 6" | 75 | 8' |

STUCCO, VENEER, PLASTER BEADS & TRIM



1-A EXPANDED CORNER BEAD



USE: Available in zinc or galvanized steel. Wide expanded flanges are easily flexed. Preferred for irregular corners. It provides increased reinforcement close to the nose of the bead. Zinc should be used for exterior applications.

| Product | Size | | Length | | Carton Quantity | | | | | | | | | |
|--------------------------------------|-------|--------|--------|--------|-----------------|--------|--------|--------|--------|----|----|--------|-----|--------|
| | in. | (mm) | ft. | (m) | No. Pcs. | Weight | | Length | | | | | | |
| | | | | | | lbs. | (kg) | ft. | (m) | | | | | |
| 1-A Expanded Corner Bead, Galvanized | 2-5/8 | (66.7) | 8 | (2.44) | 30 | 52 | (23.6) | 240 | (73.2) | 30 | 56 | (25.5) | 300 | (91.4) |
| 1-A Expanded Corner Bead, Zinc | 2-5/8 | (66.7) | 10 | (3.05) | 30 | 48 | (21.8) | 300 | (91.4) | | | | | |
| 1-A Expanded Corner Bead, Galvanized | 3 | (66.7) | 8 | (2.44) | 30 | 58 | (26) | 240 | (73.2) | 30 | 63 | (29) | 300 | (91.4) |

#66 EXPANDED FLANGE CASING BEAD





USE: As a plaster stop and as exposed trim around window and door openings. Can also be used at the junction or the intersection of plaster and other wall or ceiling finishes. Zinc should be used for exterior applications. Available with weep holes.

| Product | Depth or Grounds | | Length | | Carton Quantity | | | | | | | | | |
|---|------------------|--------|--------|--------|-----------------|--------|--------|--------|--------|--|--|--|--|--|
| | in. | (mm) | ft. | (m) | No. Pcs. | Weight | | Length | | | | | | |
| | | | | | | lbs. | (kg) | ft. | (m) | | | | | |
| #66 Expanded Flange Casing Bead, Galvanized | 3/8 | (9.5) | 10 | (3.05) | 30 | 48 | (21.8) | 300 | (91.4) | | | | | |
| | 1/2 | (12.7) | 10 | (3.05) | 30 | 55 | (24.9) | 300 | (91.4) | | | | | |
| | 5/8 | (15.9) | 10 | (3.05) | 30 | 56 | (25.5) | 300 | (91.4) | | | | | |
| | 3/4 | (19.1) | 10 | (3.05) | 30 | 58 | (26.4) | 300 | (91.4) | | | | | |
| | 7/8 | (22.2) | 10 | (3.05) | 30 | 62 | (28.2) | 300 | (91.4) | | | | | |
| | 1-1/4 | (31.8) | 10 | (3.05) | 30 | 68 | (31.0) | 300 | (91.4) | | | | | |
| #66 Expanded Flange Casing Bead, Zinc | 1-1/2 | (38.1) | 10 | (3.05) | 30 | 72 | (32.7) | 300 | (91.4) | | | | | |
| #66 Expanded Flange Casing Bead, Galvanized | 1/2 | (12.7) | 10 | (3.05) | 30 | 51 | (23.2) | 300 | (91.4) | | | | | |
| #66 Expanded Flange Casing Bead, Zinc | 7/8 | (22.2) | 10 | (3.05) | 30 | 59 | (26.8) | 300 | (91.4) | | | | | |

Zinc available in all sizes as galv.



K-RITE CORNER BEAD



USE: A veneer bead used as an alternate to mini mesh veneer bead. It has a 1-1/2" leg and triangle cut-outs for one or two coat veneer plaster application.

| Product | Depth or Grounds | | Length | | Carton Quantity | | | | | | | | | |
|--------------------|------------------|--------|--------|--------|-----------------|--------|--------|--------|-------|--|--|--|--|--|
| | in. | (mm) | ft. | (m) | No. Pcs. | Weight | | Length | | | | | | |
| | | | | | | lbs. | (kg) | ft. | (m) | | | | | |
| K-Rite Corner Bead | 1-1/2 | (38.1) | 8 | (2440) | 60 | 58.1 | (26.3) | 480 | (146) | | | | | |
| | | | 9 | (2730) | 60 | 65.3 | (29.6) | 600 | (165) | | | | | |
| | | | 10 | (3050) | 60 | 72.6 | (32.9) | 600 | (183) | | | | | |
| | | | 12 | (3657) | 60 | 87.1 | (39.5) | 600 | (219) | | | | | |

DOUBLE X CORNER BEAD




USE: It is galvanized steel and has full 3-1/8" flanges. It is easily adjusted for plaster depth on columns and is ideal for structural tile corners with rough masonry. Double X Corner Bead has perforated stiffening ribs along the expanded flanges.


| Product | Flange Width | | Length | | Carton Quantity | | | | | | | | | |
|----------------------|--------------|--------|--------|--------|-----------------|--------|--------|--------|---------|--|--|--|--|--|
| | in. | (mm) | ft. | (m) | No. Pcs. | Weight | | Length | | | | | | |
| | | | | | | lbs. | (kg) | ft. | (m) | | | | | |
| Double X Corner Bead | 3-1/8 | (82.6) | 8 | (2.44) | 24 | 61 | (27.7) | 240 | (73.2) | | | | | |
| | | | 9 | (2.74) | 24 | 69 | (31.4) | 270 | (82.3) | | | | | |
| | | | 10 | (3.05) | 24 | 76 | (34.5) | 300 | (91.4) | | | | | |
| | | | 12 | (3.66) | 24 | 91 | (41.4) | 360 | (109.7) | | | | | |

STUCCO, VENEER, PLASTER BEADS & TRIM

VENEER CORNER BEAD (MINI BEAD 800/900)




USE: Galvanized steel, used with one-coat or two-coat veneer systems to provide 3/32" grounds. With 1-1/4" fine mesh flanges, either stapled or nailed, it provides an effective plaster key and eliminates shadowing.




| Product | Size | | Length | | Carton Quantity | | | |
|-------------|-------|--------|--------|--------|-----------------|--------|--------|-------------|
| | in. | (mm) | ft. | (mm) | No. | Weight | | Length |
| | | | | | Pcs. | lbs. | (kg) | ft. |
| Veneer | 1-1/4 | (31.8) | 8 | (2440) | 60 | 40 | (18.1) | 480 (146.3) |
| Corner Bead | | | 10 | (3050) | 60 | 50 | (22.1) | 600 (182.9) |

VENEER L TRIM



USE: As a veneer plaster stop and as an exposed trim around windows and doors. It is also used in conjunction with veneer corner bead.




| Product | Flange Width | | Galv. Finish | Length | | Carton Quantity | | | |
|---------|--------------|--------|--------------|--------|--------|-----------------|--------|--------|-------------|
| | in. | (mm) | | ft. | (mm) | No. | Weight | | Length |
| | | | | | | Pcs. | lbs. | (kg) | ft. |
| Veneer | 1/2 | (12.7) | x | 10 | (3050) | 50 | 41 | (18.6) | 500 (152.5) |
| L Trim | 5/8 | (15.9) | x | 10 | (3050) | 50 | 44 | (20.0) | 500 (152.5) |

DOUBLE V EXPANSION JOINT



USE: To relieve the stresses of expansion and contraction in large plaster areas. It is available in zinc or galvanized steel. Zinc should be used for exterior applications.

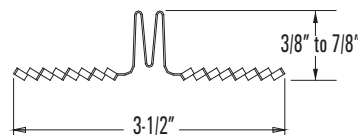

| Product | Flange Width | | Length | | Carton Quantity | | | |
|------------------|--------------|--------|--------|--------|-----------------|--------|--------|------------|
| | in. | (mm) | ft. | (m) | No. | Weight | | Length |
| | | | | | Pcs. | lbs. | (kg) | ft. |
| Double V | 3/8 | (9.5) | 10 | (3.05) | 24 | 48 | (21.8) | 240 (73.2) |
| Expansion Joint, | 1/2 | (12.7) | 10 | (3.05) | 24 | 66 | (30.0) | 240 (73.2) |
| Galvanized | 3/4 | (19.1) | 10 | (3.05) | 24 | 74 | (33.6) | 240 (73.2) |
| | 7/8 | (22.2) | 10 | (3.05) | 24 | 83 | (37.7) | 240 (73.2) |

ZINC CONTROL JOINT 093 - 10'




USE: To relieve the stresses from expansion and contraction across the joint in large ceiling and wall areas in drywall and veneer finish systems. It is used from floor to ceiling in long partition runs and from door header to ceiling. It is also recommended for repair of existing plastered masonry. Made of roll-formed zinc to resist corrosion, it has 3/32" grounds. Plastic tape protects 1/4" wide x 7/16" deep opening, and is to be removed after installation.

Limitation: where sound transmission and/or fire ratings are prime considerations, an adequate seal must be provided behind the control joint.

SYSTEM ACCESSORIES

COLD ROLLED CHANNEL



USE: Mechanical bridging for studs and applications involving metal lath and plaster.


AVAILABLE DEPTHS:
3/4", 1-1/2"

AVAILABLE GAUGES:
16 gauge

PACKAGING:
500 pieces per skid

STOCK LENGTHS:
10 & 16 Ft.
Other lengths available upon request.

Z-FURRING CHANNEL

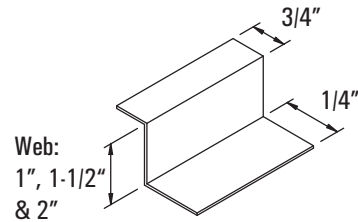

USE: For attachment of rigid insulation and wallboard to masonry walls.


AVAILABLE DEPTHS:
1" (1), 1-1/2" (112) & 2" (2)

AVAILABLE GAUGES:
25, 20, 18, 16, 14 & 12 gauge

PACKAGING:
1,000 pieces per skid

STOCK LENGTHS:
10 Ft.
Other lengths available upon request.

UTILITY ANGLE



USE: For miscellaneous attachments of intersecting framing components and right angle corner enclosures at lapped framing conditions.


AVAILABLE SIZES:
1-1/2" x 1-1/2", 2" x 2"

GAUGES:
25, 20

PACKAGING:
1,000 pieces per skid

STOCK LENGTHS:
10 Ft.
Other lengths available upon request.

FLAT STRAPS



USE: Tension component. Backing plates for wall mounted fixtures, railings, Stud bridging, etc.


AVAILABLE SIZES:
4", 6"

GAUGES:
25, 22, 20, 18, 16, 14 & 12

PACKAGING:
500 pieces per skid

STOCK LENGTHS:
10 Ft.
Other lengths available by special order
Product furnished decoiled.

GROMMET



USE: Designed to fit into knockout of studs. Easy snap-in fit. No tools required. Protects wiring from edge of knockout


PACKAGING:
50 pieces per bag
1000 bags per carton

TIE WIRE




USE: Tie wire is used to support suspended cold rolled channel gridwork for stucco, plaster, acoustical or drywall ceilings. Available in several gauges.

SHAFTWALL METAL PRODUCTS

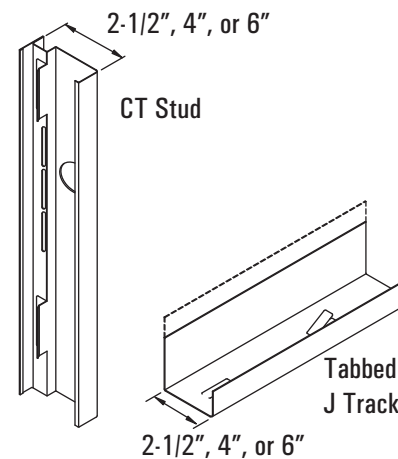

Please refer to our Shaftwall Catalog for more information on these products.

AREA SEPARATION WALL

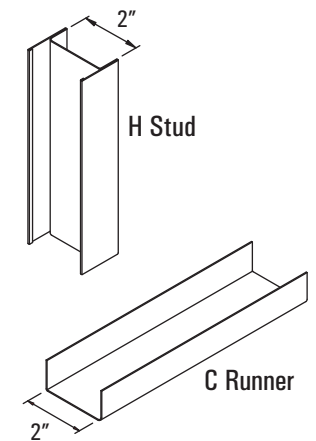



www.MarinoWARE.com

CORPORATE OFFICE

400 Metuchen Road
South Plainfield, NJ 07080
800.627.4661 Toll-Free
908.757.9000 Phone
908.412.1442 Fax

SALES OFFICE

137 Broadway, Suite B
Amityville, NY 11701
800.627.4667 Toll-Free
631.691.2200 Phone
631.691.1492 Fax

GEORGIA FACILITY

777 Greenbelt Parkway
Griffin, GA 30223
800.504.8199 Toll-Free
678.688.1312 Phone
678.688.1379 Fax

INDIANA FACILITY

4245 Railroad Avenue
East Chicago, IN 46312
219.378.7100 Phone
219.378.7106 Fax

TEXAS FACILITY

10101 Bay Area Blvd.
Pasadena, TX 77507
866.852.9510 Toll-Free
281.283.8100 Phone
281.283.8105 Fax

ENGINEERING OFFICE

175 Country Club Dr.
Suite 200A
Stockbridge, GA 30281
866.545.1545 Toll-Free
770.507.2600 Phone
770.507.2605 Fax