

For complete information including specifications for Timely's kerf prefinished steel door frame with factory installed door seal, visit our website at www.timelyframes.com



Timely Corporate Offices:
10241 Norris Ave., Pacoima, CA 91331-2292
818-492-3500 / 800-247-6242 / Fax 818-492-3530
Eastern Distribution Center:
9782 Interocean Drive, Cincinnati, OH 45246
513-682-9600 / 800-346-4395 / Fax 513-682-4102
Georgia:
4713 Hammermill Road, Tucker, Georgia 30084
770-493-8811 / 800-445-8899 / Fax 770-491-1653

— DISTRIBUTED BY —

**Timely's
Built-In Door Seal
Prevents Job-Site
Installation Problems.**




**Plus Timely's New
Steel Kerf Door Frame
With Built-In
Door Seal Cuts Costs,
Boosts Performance.**



Job-site Installation Problem #1

Failure to thoroughly clean surface of frame leads to poor adhesion of stick on door seal which causes it to separate from the frame. With Timely, you avoid call-backs.

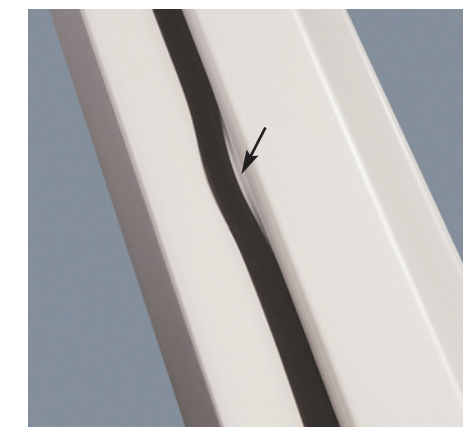

Job-site Installation Problem #2

Poor alignment of the door seal can lead to inadequate performance. Again, with Timely, you avoid call-backs.



Introducing a prefinished, fixed throat kerf steel door frame with a factory-installed seal that's tailor made for entry doors in hotels, offices, light commercial construction, garage-to-house and multi-housing. Whatever your project may be, turn to Timely for secure, built-in entry door seal protection and so much more.

AVOID THE PITFALLS OF ON-SITE DOOR SEAL INSTALLATIONS

- Possibility of inferior workmanship and resulting call-backs
- Door seal can easily peel away from frame
- Minimized sound control caused by low profile design

FACTORY INSTALLED DOOR SEAL SAVES MONEY, ELIMINATES RISKS

- Built-in door seal installed at factory in half the time it takes for jobsite installation of adhesive seal
- Lasts for the life of the installation
- Provides superior sound, smoke, light, airflow control
- Stays in place, meets requirements of NFPA101
- Resilient foam will not collapse or take a "set"

ESTIMATED SAVINGS PER OPENING WITH TIMELY:

Timely Kerf frames with built-in door seal save up to \$10 per opening vs field applied smoke seal.

STILL MORE BENEFITS

- Factory-mitered door seal corners offer perfect fit and function, enhanced aesthetic beauty
- Easy door seal replacement without damaging jamb or seal, no need for solvent to remove old adhesive
- Convenient foam insertion, maximum retention
- Uniform door seal appearance, available in beige, black, white, bronze, grey to color match four of our standard frame colors

PLUS TIMELY QUALITY, EFFICIENCY, WIDE SELECTION

- No jobsite painting or cleanup thanks to Timely prefinished frames
- Frames available in 4 stocking, 32 custom colors or any other color match
- 5 casing profiles, or choose your own wood casing
- 90-minute positive pressure fire rating
- 18-gauge steel construction
- Full perimeter anchoring and reinforced hardware for greater strength and durability
- 5/8 stop and wall size 4 - 8 inch

CUSTOMER SERVICE SETS THE STANDARD

Timely's new state-of-the-art roll mill assures product availability and prompt, on-time delivery.

OUR DOOR SEAL SPECIFICATION ASSURES YOU THE BEST

Timely selected Q-LON®, a product of Schlegel Systems, Inc., as the door seal for its new kerf frames for some very good reasons. Q-LON has been on the market since the early 1970s. To date, not a single problem attributable to Q-LON has been reported to Schlegel. And no wonder:

A highly engineered embossed polyethylene liner makes Q-LON paint and varnish-resistant and maintains its attractive appearance, while helping to assure durability.

It is UV stabilized to remain stable in sunlight, and has been tested up to 5,000Kj/m² with no visible degradation. Also, an increased compression range decreases the chance of seal failure.


Q-LON'S resilient urethane open-celled foam retains shape and resiliency, providing excellent all-temperature sealing. There are no corner leaks and the seal conforms to uneven surfaces. Drafts and leaks in other areas are eliminated, as well. Q-LON also conforms to warped doors due to its resilient reach characteristics.

TESTS PROVE Q-LON'S VALUE

After 6,670 hours of testing, closed cell foam became stiff and failed to recover after being compressed. In the same test, the Q-LON open cell foam remained soft and resilient, easily able to fill gaps in doors.

Also during this test, Q-LON was completely functional after liners on other seals with weak UV stabilizers quickly deteriorated in the sun and heat, causing the seal to shrink.

This door seal is UL fire-rated up to three hours for listed steel frames.

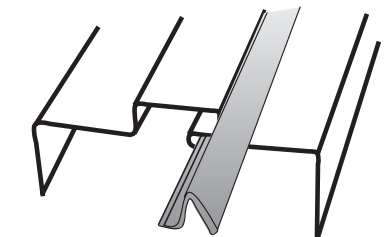

Factory installed door seal stays in place. Seal can easily be replaced.

Look to Timely for superior quality and workmanship that has made us an industry leader for over 35 years

TIMELY®