



Tag: _____

SPECIFICATION: BLÜCHER PIPE AISI Type 316L (standard) stainless steel pipe system, with Push-Fit socket connections with EPDM (standard) sealing ring. All BLÜCHER PIPE to be treated with pickling and passivation finish process.

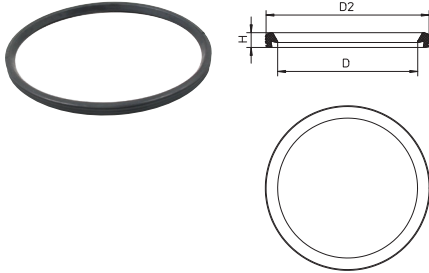


EPDM Sealing Ring Black (Standard) Dimensional Chart

Model No.	D	H	D2
EPDM-1-1/4	1-1/4"(32)	1/4"(6)	1-5/8"(40)
EPDM-1-1/2	1-1/2"(40)	3/8"(8)	2-1/16"(52)
EPDM-2	2"(50)	3/8"(8)	2-1/2"(62)
EPDM-3	3"(75)	3/8"(8)	3-7/16"(87)
EPDM-4	4"(110)	3/8"(9)	4-15/16"(124)
EPDM-5	5"(125)	7/16"(10)	5-5/8"(142)
EPDM-6	6"(160)	1/2"(12)	7-1/8"(180)
EPDM-8	8"(200)	9/16"(13)	8-13/16"(224)
EPDM-10	10"(250)	3/4"(19)	11-1/8"(282)

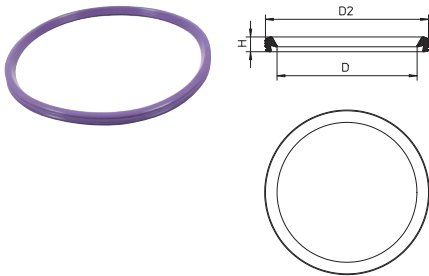

FPM Sealing Ring Purple (High Temperature Applications) Dimensional Chart

Model No.	D	H	D2
FPM-2	2"(50)	3/8"(8)	2-1/2"(62)
FPM-3	3"(75)	3/8"(8)	3-7/16"(87)
FPM-4	4"(110)	3/8"(9)	4-15/16"(124)
FPM-5	5"(125)	7/16"(10)	5-5/8"(142)
FPM-6	6"(160)	1/2"(12)	7-1/8"(180)
FPM-8	8"(200)	9/16"(13)	8-13/16"(224)
FPM-10	10"(250)	3/4"(19)	11-1/8"(282)

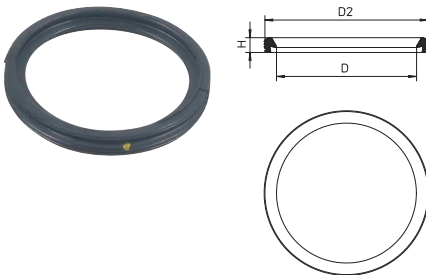

NBR Sealing Ring Yellow (Petroleum Applications)

Model No.	D	H	D2
NBR-2	2"(50)	3/8"(8)	2-1/2"(62)
NBR-3	3"(75)	3/8"(8)	3-7/16"(87)
NBR-4	4"(110)	3/8"(9)	4-15/16"(124)
NBR-5	5"(125)	7/16"(10)	5-5/8"(142)
NBR-6	6"(160)	1/2"(12)	7-1/8"(180)
NBR-8	8"(200)	9/16"(13)	8-13/16"(224)
NBR-10	10"(250)	3/4"(19)	11-1/8"(282)

Job Name _____ Contractor _____

Job Location _____ Approval _____

Engineer _____ Contractor's P.O. No. _____

Approval _____ Representative _____