
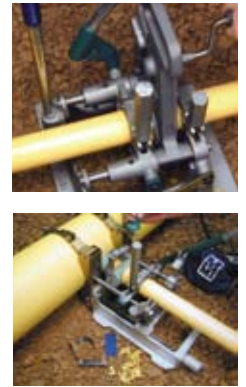


McElroy No.2LC and No.2CU

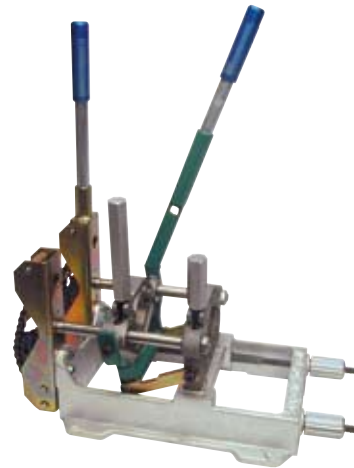

McElroy
Fusion
Equipment

The No. 2LC (Locking Cam) is designed to butt fuse tees, ells, and other fittings with consistent high quality results. The machine's semi-automatic locking cam system maintains force during the cooling cycle. The machine is primarily made of surface hardened aluminum for light weight and durability. The jaws and inserts have multiple serrations for maximum grip on the pipe.

The No.2CU (Combination Unit) incorporates McElroy's patented combination side-wall feature. The No. 2CU's narrow clamp design provides for butt fusion of tees, ells and other fittings. Additional sidewall clamps with chain vise allows the unit to be attached on the centerline of a pipe main for saddle fusion of service saddles, branch saddles and small tapping tees. The machine incorporates surface hardened aluminum and stainless steel for light weight and durability.

**McElroy No.2 LC,
No.2 CU**
Fusion capability for
1/2" CTS - 2" IPS Pipe
(20 mm - 60 mm) saddle fusion
for fusing 2" and smaller branch
saddles, tapping tees and service saddle
fittings onto 1-1/4" IPS and
larger main sizes.

2LC	2CU
L 13" (330 mm)	L 20" (508 mm)
W 14" (356 mm)	W 11" (279 mm)
H 15" (381 mm)	H 27" (686 mm)
WEIGHT	WEIGHT
23 lbs.	28 lbs.
(10.4 Kg)	(12.7 Kg)

1-800-345-ISCO

www.isco-pipe.com

