


Tag: _____


Mesh Grating (Standard)

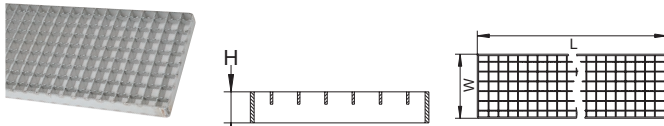

Dimensional Chart

Model No.	L	W	H	Load Class
BTG-M6	19-5/8"(500)	5-3/4"(145)	1"(25)	HD
BTG-M8	19-5/8"(500)	7-11/16"(195)	1"(25)	HD


Slot Grating (-SG)

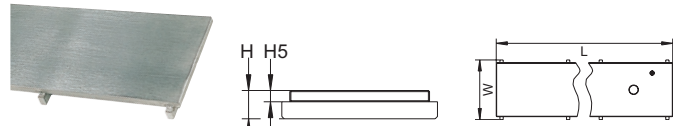

Dimensional Chart

Model No.	L	W	H	H5	Load Class
BTG-S6	19-5/8"(500)	5-3/4"(145)	1"(25)	7/16"(10)	HD
BTG-S8	19-5/8"(500)	7-11/16"(195)	1"(25)	7/16"(10)	HD


Hygenic-Pro Grating (-HG)

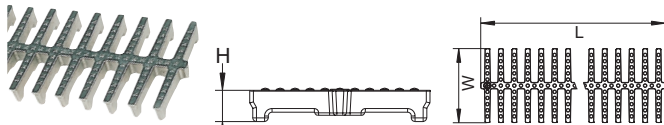

Dimensional Chart

Model No.	L	W	H	Load Class
BTG-H6	19-5/8"(500)	5-3/4"(145)	1"(25)	HD
BTG-H8	19-5/8"(500)	7-11/16"(195)	1"(25)	HD


Extra Heavy Duty Ladder Grating (-XLG)

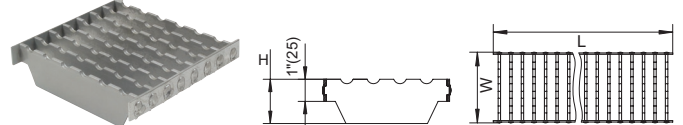

Dimensional Chart

Model No.	L	W	H	Load Class
BTG-XL6	19-5/8"(500)	5-3/4"(145)	2"(50)	XHD
BTG-XL8	19-5/8"(500)	7-11/16"(195)	2"(50)	XHD

Ladder Grating (-LG)

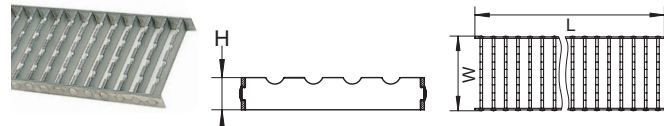

Dimensional Chart

Model No.	L	W	H	Load Class
BTG-L6	19-5/8"(500)	5-3/4"(145)	1"(25)	HD
BTG-L8	19-5/8"(500)	7-11/16"(195)	1"(25)	HD

Load Ratings

Load ratings are based upon maximum anticipated traffic, in accordance with American National Standards ASME A112.21.1M. See specification pages for specific load rating data.

Light Duty (LD) - Safe Live Load Under 2000 lbs.

Medium Duty (MD) - Safe Live Load 2000-4999 lbs.

Heavy Duty (HD) - Safe Live Load 5000-7499 lbs.

Extra Heavy Duty (XHD) - Safe Live Load Between 7500 and 10,000 lbs.

Special Duty (SD) - Safe Live Load Over 10,000 lbs.

Job Name _____ Contractor _____

Job Location _____ Approval _____

Engineer _____ Contractor's P.O. No. _____

Approval _____ Representative _____