


Branch Saddle: 2" DR 11 Outlet

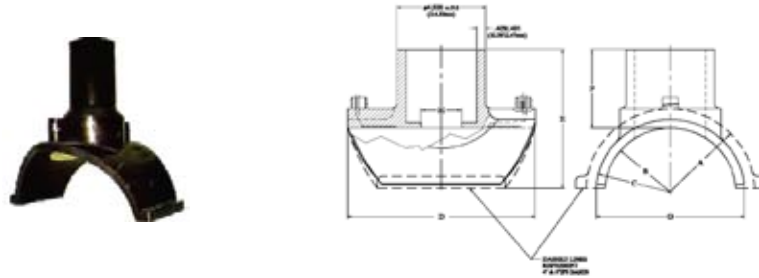

Nom. Pipe Saddle Size	Radius R	Dimension A	Dimension B	Dimension C	Dimension D
2 IPS	1.187 ±.012	3.59	6.65	.348	1.50
3 IPS	1.750 ±.012	4.60	6.66	.346	1.81
4 IPS	2.250 ±.012	6.26	7.27	.365	1.81
4 DIPS	2.400 ±.012	6.26	7.27	.365	1.81
6 IPS	3.312 ±.012	8.68	8.43	.375	1.81
6 DIPS	3.450 ±.012	8.68	8.43	.375	1.81

Nominal Pipe Saddle Size	Outlet Size	Part #	Fusion Time Setting	Pin	Clamp Style See Page 207	Weight
2 IPS	2 IPS x 2 IPS AWWA	5751598	A	3.0mm	B	.0880
	2 IPS x 2 IPS	5756587*	M	4.7mm	B	.925
3 IPS	3 IPS x 2 IPS	5751599	A	3.0mm	C	.944
4 IPS/DIPS	4 IPS/DIPS x 2 IPS AWWA	5751600	A	3.0mm	D	1.080
	4 IPS/DIPS x 2 IPS FM (CL 150)	5754083	A	3.0mm	D	1.080
6 IPS/DIPS	6 IPS/DIPS x 2 IPS	5751601	A	3.0mm	E	1.275
	6 IPS/DIPS x 2 IPS FM (CL 150)	5754084	A	3.0mm	E	1.275
8 IPS	8 IPS x 2 IPS FM	5758330	A	3.0mm	H/I	0.925
	8 IPS x 2 IPS FM (CL 150)	5754085	A	3.0mm	H/I	0.925
8 DIPS	8 DIPS x 2 IPS	5758673*	M	4.7mm	H/I	N/A
10 DIPS	10 DIPS x 2 IPS	5758674*	M	4.7mm	H/I	N/A
12 DIPS	12 DIPS x 2 IPS	5758645*	M	4.7mm	H/I	N/A

A=Automatic Identification for Fusion Time. M=Manual Setting or Bar Code Setting.
 * Special Lead Requirements.

Central
Electrofusion
Products

1-800-345-ISCO

www.isco-pipe.com